Washing tank

Universal washing tank for quick washing of mechanical parts and components in general.
The low-pressure pneumatic system enables:
- continuous liquid detergent flow with brush for thorough washing
- washing by dipping, with the parts dipped in the liquid detergent in the tank.

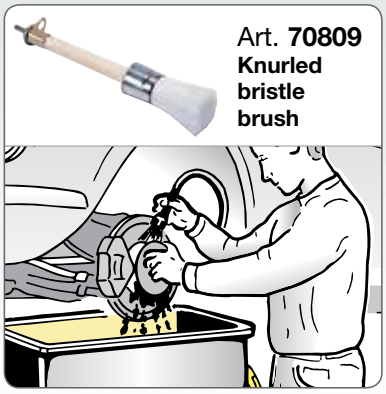

Important: do not use corrosive liquids with flashpoint below 55°C, that can give off toxic and harmful fumes.
Use specific chemical products for washing mechanical parts, according to the instructions supplied by the manufacturer

Article		70365
Tank capacity	litres	65
Washing tank capacity	litres	50
Max working pressure	bar	0,5
Required quantity of liquid	litres	50
Max blowing gun pressure	bar	12
Knurled bristle brush	Art.	70809
Packing	N° - m³	2 - 0,290
Weight	kg	47,1
Dimensions (A - B - C)	cm	51 - 67 - 107

Details and advantages



For **correct use,** add **48 - 52** litres of detergent liquid



The pneumatic systems works at low pressure **0,5 bar,** consuming very little air



Washing with brush, with continuous liquid flow



Dip washing, with parts placed in the tank



Brush or dip wash management unit



Decanting filter/screen