Manual grease pumps

low pressure transferring **20** bar

Portable manual lever-operated grease transfer pumps.
Each cycle of the lever delivers 50 g of grease. Practical and handy, they are used for filling gearcases, casings, hand-operated grease guns. They enable easy changing of the grease container (drums or bucket) and are equipped with a grease follower plate that protects the lubricant and ensures positive priming.

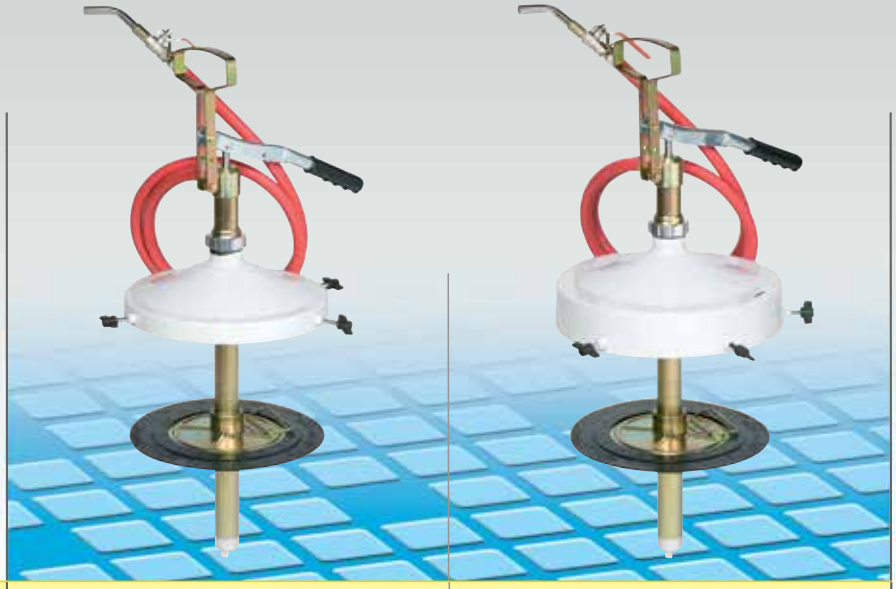

Article		60410	60411
Suitable for drums	kg	16 - 30	16 - 30
For drums with external ø	mm	from 260 to 300	from 270 to 330
Delivery hose length	m	2 - 1/2”	2 - 1/2”
Max outlet pressure	bar	18/20	18/20
Capacity every 10 cycles of lever	g	500	500
Drum cover ø	mm	310	337
Grease follower plate ø	mm	310	310
Packing	N° - m³	1 - 0,030	1 - 0,040
Weight	kg	6	6,7
Dimensions (A - B - C)	cm	78 - 31 - 35	78 - 33,7 - 35

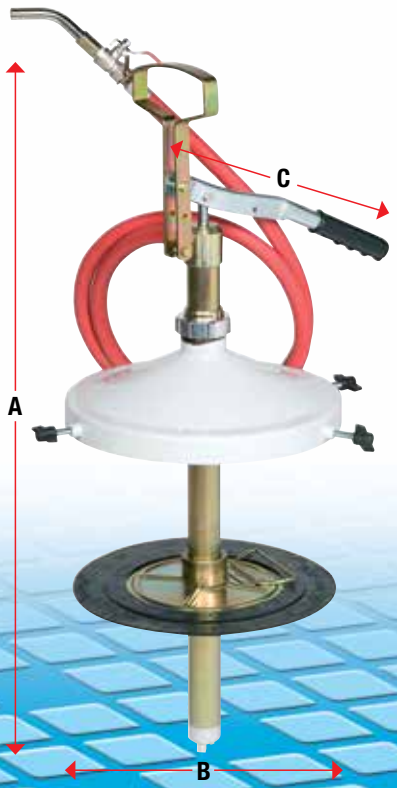

Art. **60450**
Female quick connector
complete with check valve, 1/4” F thread for filling central greasing system.
Max pressure 350 bar

Art. **60451**
Male quick connector
complete with check valve, 1/4” F thread for filling central greasing system.
Max pressure 350 bar

Quick connect coupling

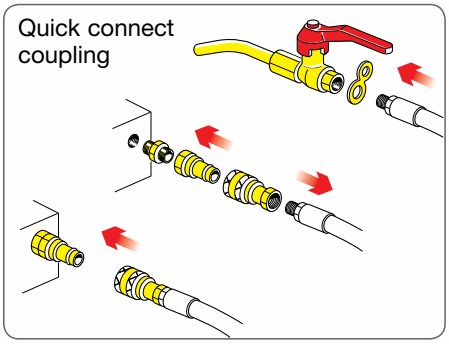

Filling central greasing system



Transfer in small drums