ENCLOSED IN PAINTED STEEL

Series 450

Series 440

In accordance with directive
Atex 94/9
IIB 2 GD c T4 T135 °C X
o II 3 GD c X (20 bar)

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings

	FIXED support Article	SWIVELLING support Article	Hose supplied	Connection inlet	Connection outlet
Air - Water 20 bar - bras swivel joint - **"viton"** seals	**8450.100**	**8440.100**	without hose	F1/2"G	F1/2"G
	8450.101	**8440.101**	12m - 3/8" (995.212)	F1/2"G	M3/8"G
	8450.102	**8440.102**	18m - 3/8" (995.218)	F1/2"G	M3/8"G
	8450.103	**8440.103**	10m - 1/2" (996.210)	F1/2"G	M1/2"G
	8450.104	**8440.104**	15m - 1/2" (996.215)	F1/2"G	M1/2"G
Oil and similar products 150 bar - carbon steel swivel joint - **"polyurethane"** seals	**8450.400**	**8440.400**	without hose	F1/2"G	F1/2"G
	8450.401	**8440.401**	10m - 1/2" (996.310)	F1/2"G	M1/2"G
	8450.402	**8440.402**	15m - 1/2" (996.315)	F1/2"G	M1/2"G
Grease 600 bar - carbon steel swivel joint - **"polyurethane"** seals	**8450.500**	**8440.500**	without hose	F3/8"G	F1/2"G
	8450.501	**8440.501**	12m - 1/4" (993.512)	F3/8"G	M1/4"G
	8450.502	**8440.502**	18m - 1/4" (993.518)	F3/8"G	M1/4"G
	8450.505	**8440.505**	10m - 3/8" (995.710)	F3/8"G	M1/4"G
	8450.506	**8440.506**	15m - 3/8" (995.715)	F3/8"G	M1/4"G

FIXED OVERALL DIMENSIONS

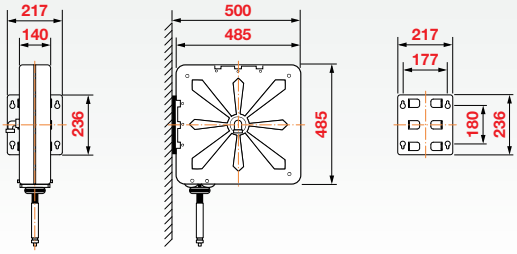

N°1 packing m³ 0,111 from kg 21 to 29

SWIVELLING OVERALL DIMENSIONS

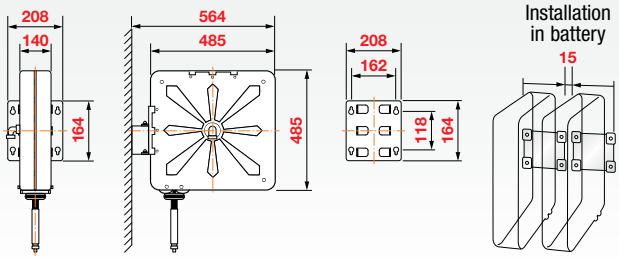

N°1 packing m³ 0,111 from kg 22 to 30

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

SWIVELLING HOSE REELS INSTALLATION
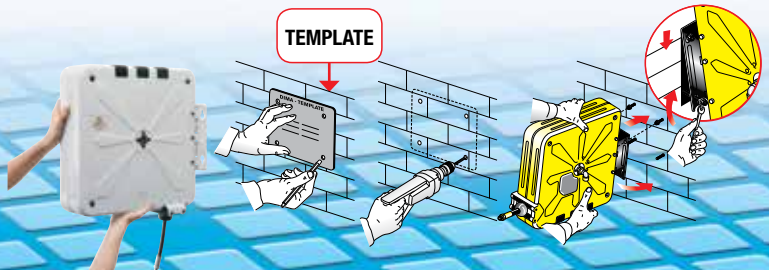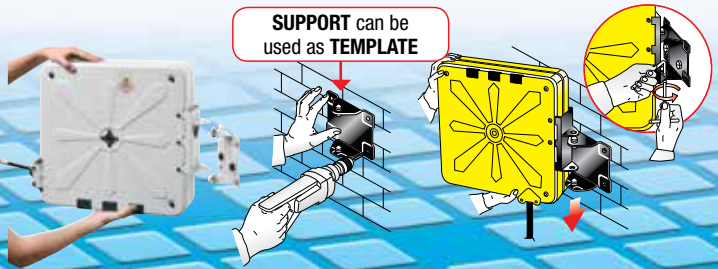
The **quick coupling swivelling support** facilitates hose reel installation and enables **55° rotation** to the right or left or locking in **fixed positioned at 0°** by means of clamping with two screws.