ENCLOSED IN PAINTED STEEL with ABS spool

Series 450

In accordance with directive
Atex 94/9 II 3 GD c X

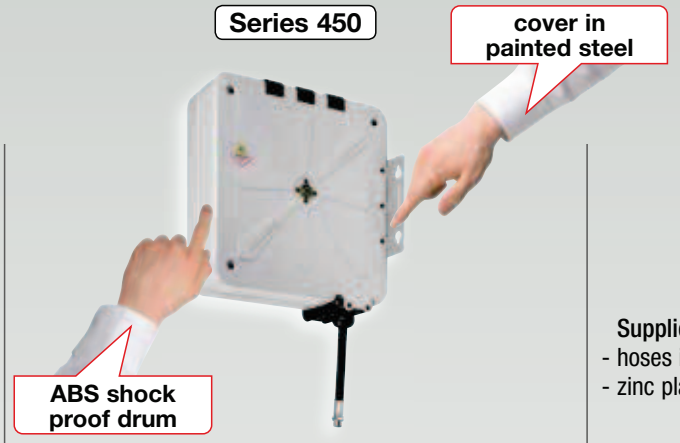

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings

	FIXED support Article	Hose supplied	Connection inlet	Connection outlet
Air - Water 20 bar - bras swivel joint - **"viton"** seals	**9450.100**	without hose	F1/2"G	F1/2"G
	9450.101	12m - 3/8" (995.212)	F1/2"G	M3/8"G
	9450.102	18m - 3/8" (995.218)	F1/2"G	M3/8"G
	9450.103	10m - 1/2" (996.210)	F1/2"G	M1/2"G
	9450.104	15m - 1/2" (996.215)	F1/2"G	M1/2"G
Oil and similar products 150 bar - carbon steel swivel joint - **"polyurethane"** seals	**9450.400**	without hose	F1/2"G	F1/2"G
	9450.401	10m - 1/2" (996.310)	F1/2"G	M1/2"G
	9450.402	15m - 1/2" (996.315)	F1/2"G	M1/2"G
Grease 400 bar - carbon steel swivel joint - **"polyurethane"** seals	**9450.500** *	without hose	F3/8"G	F1/2"G
	9450.501	12m - 1/4" (993.512)	F3/8"G	M1/4"G
	9450.502	18m - 1/4" (993.518)	F3/8"G	M1/4"G
	9450.505	10m - 3/8" (995.710)	F3/8"G	M1/4"G
	9450.506	15m - 3/8" (995.715)	F3/8"G	M1/4"G

* 600 bar

FIXED OVERALL DIMENSIONS

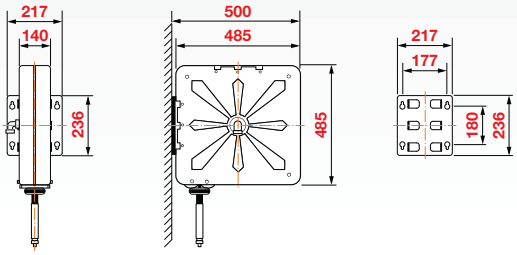

N°1 packing m³ 0,111 from kg 20 to 29

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

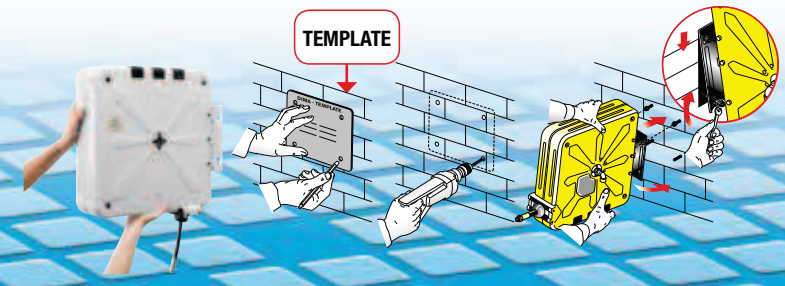

HOSE REEL INSTALLATION

Example of installation: **the hose reel can be easily repositioned according to needs**

Standard installation



Wall installation



Bench installation



Ceiling installation



PAINTED STEEL with ABS spool

Series 430

In accordance with directive
Atex 94/9 II 3 GD c X

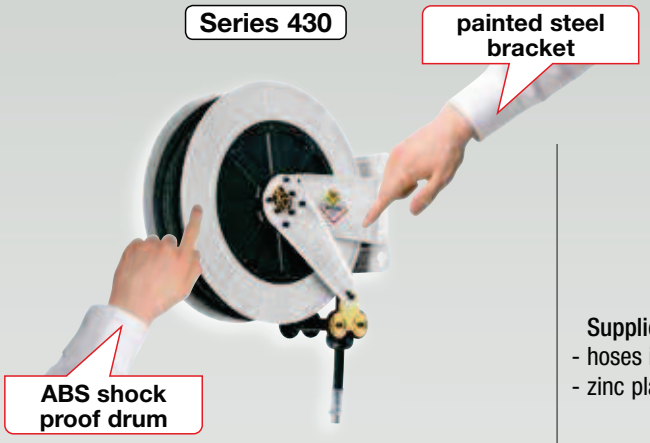

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings

	FIXED support Article		Hose supplied	Connection inlet	Connection outlet
Air - Water 20 bar - bras swivel joint - **"viton"** seals		9430.100	without hose	F1/2"G	F1/2"G
		9430.101	12m - 3/8" (995.212)	F1/2"G	M3/8"G
		9430.102	18m - 3/8" (995.218)	F1/2"G	M3/8"G
		9430.103	10m - 1/2" (996.210)	F1/2"G	M1/2"G
		9430.104	15m - 1/2" (996.215)	F1/2"G	M1/2"G
Water max 130° C 100 bar - AISI 304 stainless steel swivel joint - **"viton"** seals		9430.200	without hose	F1/2"G	F1/2"G
		9430.201	10m - 1/2" (996.311)	F1/2"G	M1/2"G
		9430.202	15m - 1/2" (996.316)	F1/2"G	M1/2"G
	hygieninc hose	9431.202	15m - 1/2" (996.415)	F1/2"G	M1/2"G
Water max 130° C 200 bar - AISI 304 stainless steel swivel joint - **"viton"** seals		9430.300	without hose	F3/8"G	F1/2"G
		9430.301	12m - 3/8" (995.512)	F3/8"G	F3/8"G
		9430.302	18m - 3/8" (995.518)	F3/8"G	F3/8"G
	hygieninc hose	9431.302	18m - 3/8" (995.618)	F3/8"G	F3/8"G
Oil and similar products 150 bar - carbon steel swivel joint - **"polyurethane"** seals		9430.400	without hose	F1/2"G	F1/2"G
		9430.401	10m - 1/2" (996.310)	F1/2"G	M1/2"G
		9430.402	15m - 1/2" (996.315)	F1/2"G	M1/2"G
Grease 400 bar - carbon steel swivel joint - **"polyurethane"** seals		9430.500 *	without hose	F3/8"G	F1/2"G
		9430.501	12m - 1/4" (993.512)	F3/8"G	M1/4"G
		9430.502	18m - 1/4" (993.518)	F3/8"G	M1/4"G
		9430.505	10m - 3/8" (995.710)	F3/8"G	M1/4"G
		9430.506	15m - 3/8" (995.715)	F3/8"G	M1/4"G

* 600 bar

FIXED OVERALL DIMENSIONS

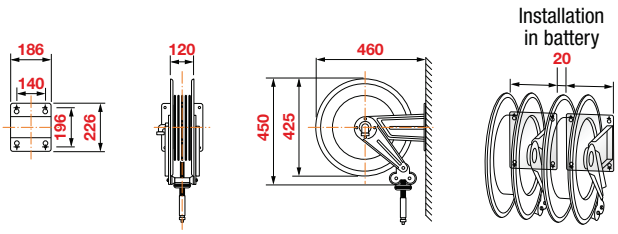

N°1 packing m³ 0,098 from kg 14 to 24

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

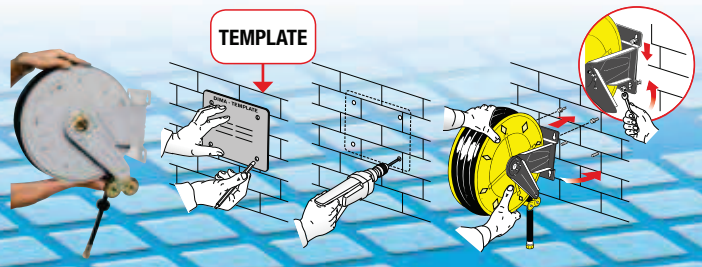

STAINLESS STEEL with ABS spool

Series 430

In accordance with directive
Atex 94/9 II 3 GD c X

Supplied with:
- hoses in black synthetic rubber
- zinc plated steel couplings

	FIXED support Article		Hose supplied	Connection inlet	Connection outlet
Air - Water 20 bar - bras swivel joint - **"viton"** seals		9432.100	without hose	F1/2"G	F1/2"G
		9432.101	12m - 3/8" (995.212)	F1/2"G	M3/8"G
		9432.102	18m - 3/8" (995.218)	F1/2"G	M3/8"G
		9432.103	10m - 1/2" (996.210)	F1/2"G	M1/2"G
		9432.104	15m - 1/2" (996.215)	F1/2"G	M1/2"G
Water max 130° C 100 bar - AISI 304 stainless steel swivel joint - **"viton"** seals		9434.200	without hose	F1/2"G	F1/2"G
		9432.201	10m - 1/2" (996.311)	F1/2"G	M1/2"G
		9432.202	15m - 1/2" (996.316)	F1/2"G	M1/2"G
	hygieninc hose	9433.202	15m - 1/2" (996.415)	F1/2"G	M1/2"G
Water max 130° C 200 bar - AISI 304 stainless steel swivel joint - **"viton"** seals		9434.300	without hose	F3/8"G	F1/2"G
		9432.301	12m - 3/8" (995.512)	F3/8"G	F3/8"G
		9432.302	18m - 3/8" (995.518)	F3/8"G	F3/8"G
	hygieninc hose	9433.302	18m - 3/8" (995.618)	F3/8"G	F3/8"G
Oil and similar products 150 bar - AISI 304 stainless steel swivel joint - **"viton"** seals		9434.200	without hose	F1/2"G	F1/2"G
		9432.401	10m - 1/2" (996.310)	F1/2"G	M1/2"G
		9432.402	15m - 1/2" (996.315)	F1/2"G	M1/2"G
Grease 400 bar - carbon steel swivel joint - **"polyurethane"** seals		9432.500 *	without hose	F3/8"G	F1/2"G
		9432.501	12m - 1/4" (993.512)	F3/8"G	M1/4"G
		9432.502	18m - 1/4" (993.518)	F3/8"G	M1/4"G
		9432.505	10m - 3/8" (995.710)	F3/8"G	M1/4"G
		9432.506	15m - 3/8" (995.715)	F3/8"G	M1/4"G

* 600 bar

FIXED OVERALL DIMENSIONS

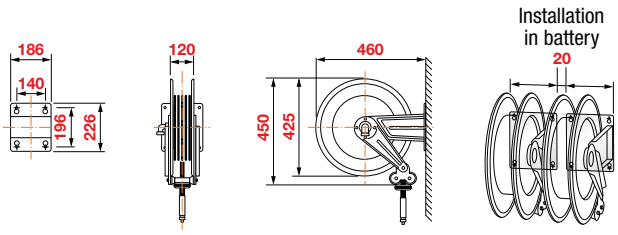

N°1 packing m³ 0,098 from kg 14 to 24

FIXED HOSE REELS INSTALLATION
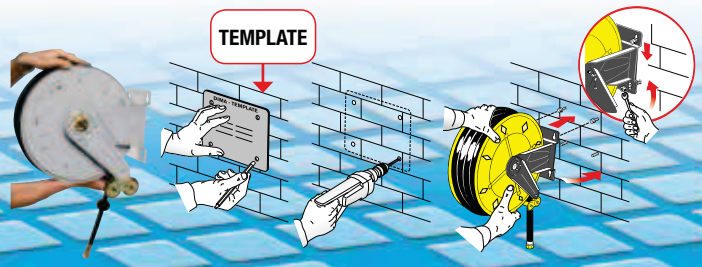
The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.