DIESEL FUEL - 10 bar

PAINTED STEEL

In accordance with directive **Atex 94/9 IIB 2 GD c T4 T135 °C X**

FIXED

Supplied with:
- hoses in antistatic black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- **"viton"** seals

	Article	Hose supplied	Connection inlet	Connection outlet
S. 530	8530.600	without hose	F1"G	F1"G
	8530.603	12m - 3/4" (997.812)	F1"G	M3/4"G
	8530.604	8m - 1" (998.808)	F1"G	M1"G
S. 540	8540.100	without hose	F1"G	F1"G
	8540.601	15m - 3/4" (997.815)	F1"G	M3/4"G
	8540.602	20m - 3/4" (997.820)	F1"G	M3/4"G
	8540.603	15m - 1" (998.815)	F1"G	M1"G
S. 560	8560.100	without hose	F1"G	F1"G
	8560.603	40m - 3/4" (997.840)	F1"G	M3/4"G
	8560.604	20m - 1" (998.820)	F1"G	M1"G
	8560.605	30m - 1" (998.830)	F1"G	M1"G

FIXED OVERALL DIMENSIONS

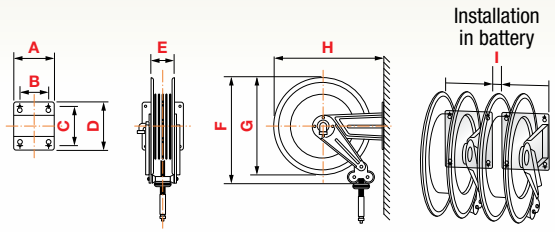

Art.	A	B	C	D	E	F	G	H	I	1-m³	Kg *
S. 530	203	153	220	258	115	550	510	560	20	0,120	from 19 to 42
S. 540	300	218	228	268	190	550	510	573	0	0,175	from 24 to 40
S. 560	488	399	238	272	368	550	510	578	0	0,310	from 30 to 80

* The list shows min and max weight for each series: min weight refers to version without hose, max weight revers to heaviest version which depends on hose length and diameter.

FIXED HOSE REELS INSTALLATION

The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.

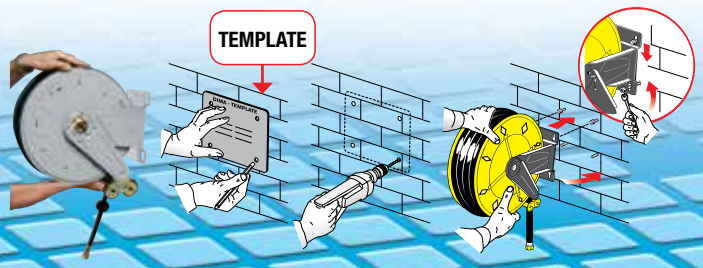

DIESEL FUEL - 10 bar

STAINLESS STEEL

In accordance with directive **Atex 94/9 IIB 2 GD c T4 T135 °C X**

FIXED

Supplied with:
- hoses in antistatic black synthetic rubber
- zinc plated steel couplings
- brass swivel joint
- **"viton"** seals

Article		Hose supplied	Connection	
			inlet	outlet
S. 540	8542.100	without hose	F1"G	F1"G
	8542.601	15m - 3/4" (997.815)	F1"G	M3/4"G
	8542.602	20m - 3/4" (997.820)	F1"G	M3/4"G
	8542.603	15m - 1" (998.815)	F1"G	M1"G
S. 560	8562.100	without hose	F1"G	F1"G
	8562.603	40m - 3/4" (997.840)	F1"G	M3/4"G
	8562.604	20m - 1" (998.820)	F1"G	M1"G
	8562.605	30m - 1" (998.830)	F1"G	M1"G

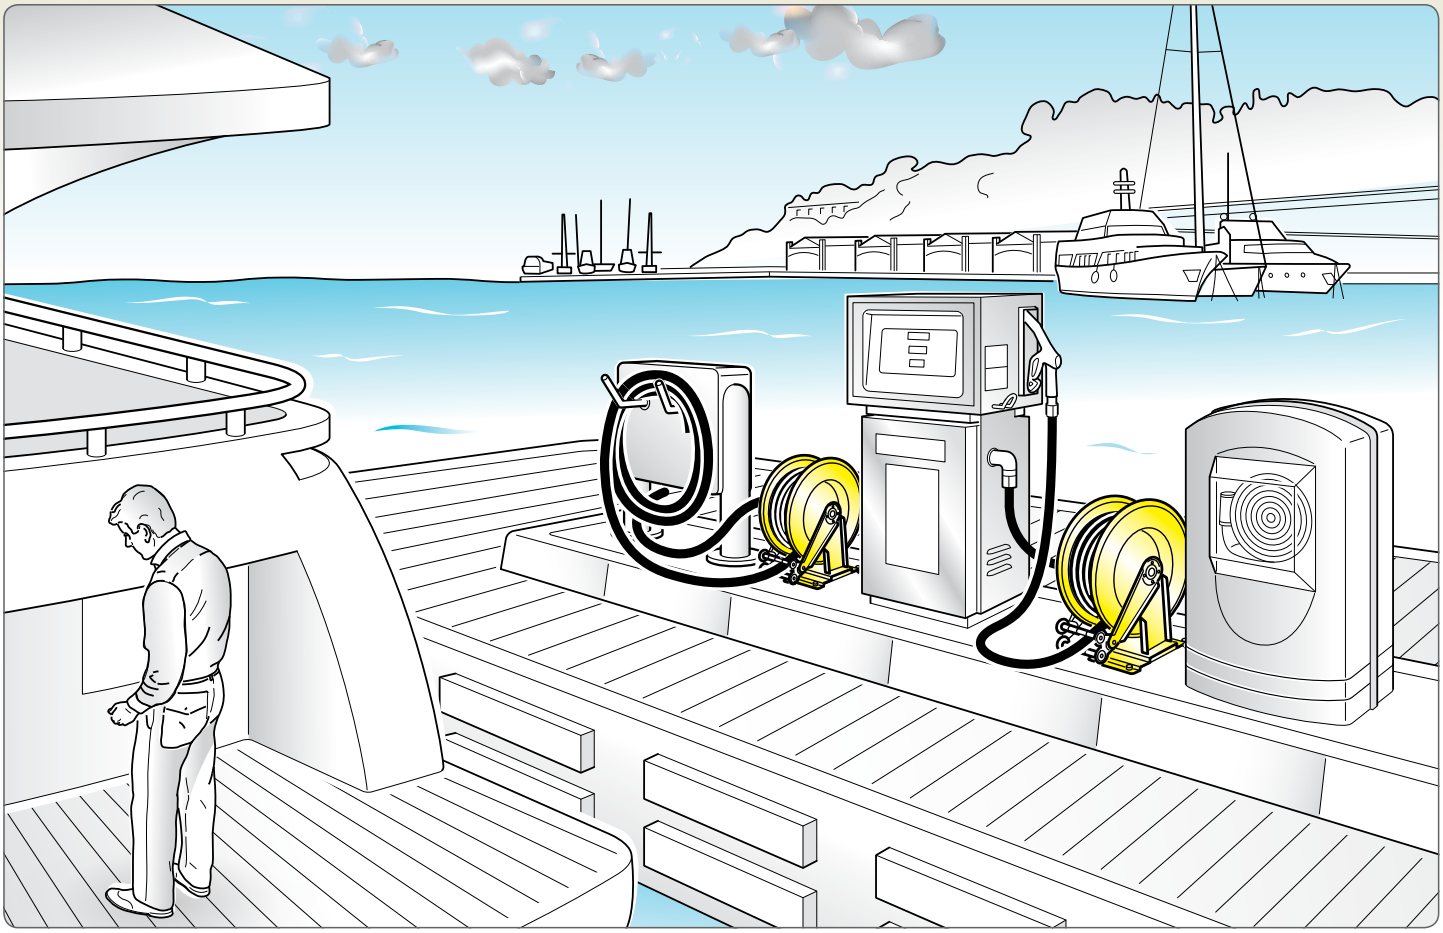

ADBLUE - 10 bar

PAINTED STEEL

In accordance with directive
Atex 94/9 IIB 2 GD c T4 T135 °C X
o II 3 GD c X (20 bar)

FIXED

Supplied with:
- hoses in antistatic EPDM rubber
- AISI 316L stainless steel couplings
- AISI 316L stainless steel swivel joint
- **"viton"** seals

	Article	Hose supplied	Connection	
			inlet	outlet
S. 436	8436.200	without hose	F1"G	F3/4"G
	8436.204	10m - 19x27 (967.210)	F3/4"G	M3/4"G
	8436.205	15m - 19x27 (967.215)	F3/4"G	M3/4"G

ADBLUE - 10 bar

INOX

FIXED

Supplied with:
- hoses in antistatic EPDM rubber
- AISI 316L stainless steel couplings
- AISI 316L stainless steel swivel joint
- **"viton"** seals

	Article	Hose supplied	Connection	
			inlet	outlet
S. 537	8537.200	without hose	F1"G	F3/4"G
	8537.204	10m - 19x27 (967.210)	F3/4"G	M3/4"G
	8537.205	15m - 19x27 (967.215)	F3/4"G	M3/4"G

Hose reels for AdBlue, the fluid used in SCR systems which are present in Euro4 and Euro5 trucks, have been purposely designed by using **stainless steel AISI 316L** for those parts which get in contact with the fluid, avoiding in this way any contamination of the same fluid.

FIXED OVERALL DIMENSIONS

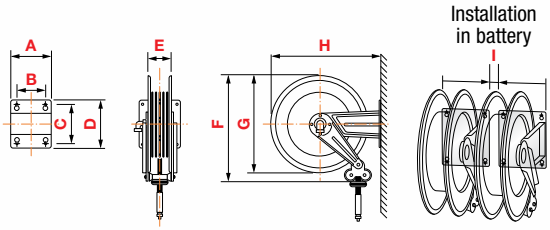

Art.	A	B	C	D	E	F	G	H	I	1-m³	Kg
S. 436	337	302	160	203	168	450	420	460	20	0,122	from 19 to 42
S. 537	203	153	220	258	115	550	510	560	0	0,120	from 19 to 42

* The list shows min and max weight for each series: min weight refers to version without hose, max weight revers to heaviest version which depends on hose length and diameter.

FIXED HOSE REELS INSTALLATION
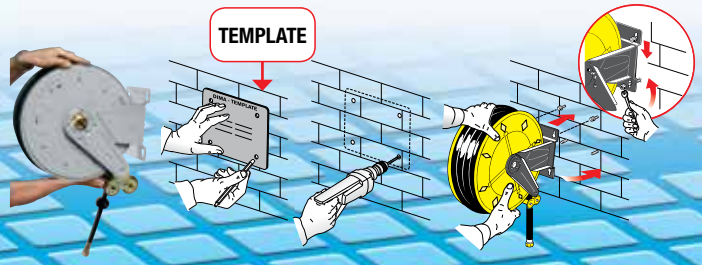
The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.