SERIES WITH DOUBLE INLET AND OUTLET

PAINTED STEEL

In accordance with directive **Atex** 94/9 IIB 2 GD c T4 T135 °C X

	Article	Connection inlet	Connection outlet	Equipped with 2 swivels	Equipped with seals
S. 430					
Air - Water **20** bar	8430.1000	F1/2"G	M3/8"G	brass	**viton**
Oil - Water **200** bar	8430.3000	F3/8"G	M3/8"G	AISI 304 stainless steel	**viton**
Oil - Paint **200** bar	8430.4000	F1/2"G	M3/8"G	steel	**polyurethane**
Oil **400** bar	8430.5000	F3/8"G	M3/8"G	steel	**polyurethane**
S. 530					
Air - Water **20** bar	8530.1000	F1/2"G	M3/8"G	brass	**viton**
Oil - Water **200** bar	8530.3000	F3/8"G	M3/8"G	AISI 304 stainless steel	**viton**
Oil - Paint **200** bar	8530.4000	F1/2"G	M3/8"G	steel	**polyurethane**
Oil **400** bar	8530.5000	F3/8"G	M3/8"G	steel	**polyurethane**
S. 540					
Oil **400** bar	8540.5000	F3/8"G	M3/8"G	steel	**polyurethane**

Hose reels for dual hoses can be used for the applications where it is requested **the distribution of two fluids simultaneously** (e.g. air and paint in painting systems) or the recycle of the same fluid (e.g. for hydraulic tools).

FIXED OVERALL DIMENSIONS

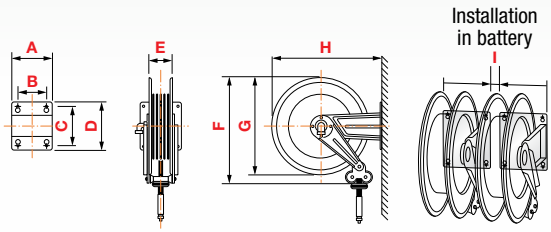

Art.	A	B	C	D	E	F	G	H	I	1-m³	Kg
S. 430	186	140	196	226	115	460	420	460	20	0,098	17,5
S. 530	203	153	220	258	115	550	510	560	20	0,120	24,5
S. 540	300	218	228	268	190	550	510	573	0	0,175	30

FIXED HOSE REELS INSTALLATION
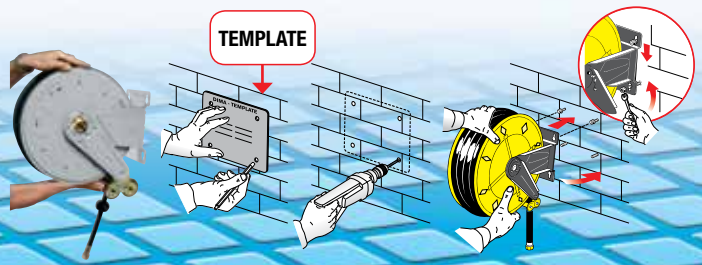
The quick coupling support is equipped with 4 slot holes that allow an easy and safe installation of the hose reel.
The **template** supplied facilitates drilling of the holes and there fore hose reel fixing.