Stainless steel AISI 304 pumps for TRANSFER

Ratio 1:1
Flow rate 30 l/min



Stainless steel AISI 304 air-operated pumps for short-medium distance transfer.
Ideal for transferring low-medium viscosity fluids such as: antifreeze liquid, windshield washing liquid and chemical products.

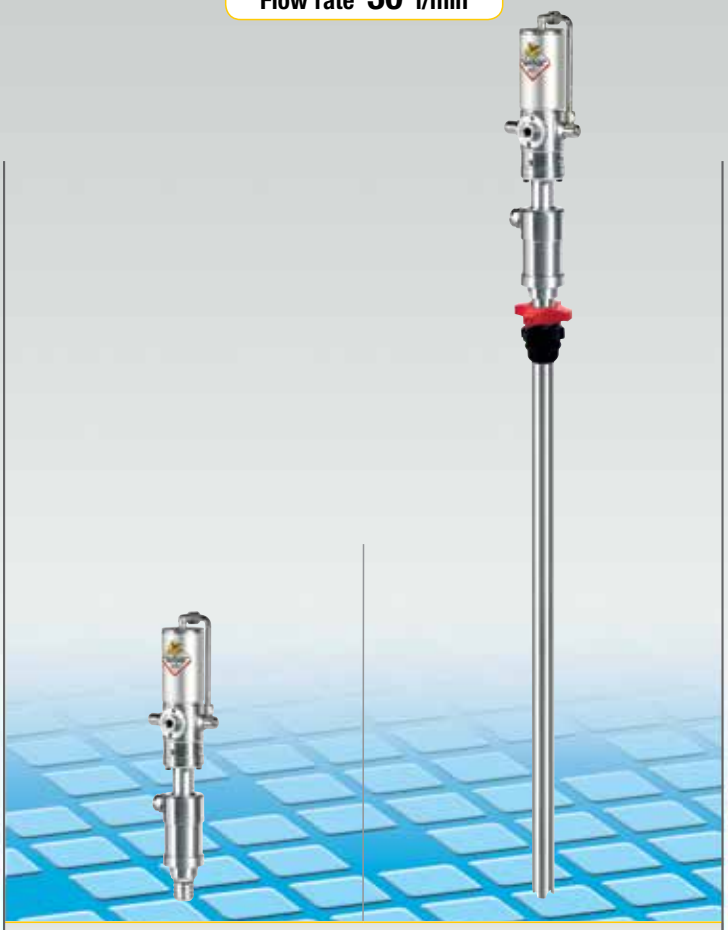

series 600 INOX

		divorced	divorced
Article with seals in VITON		**33360**	**33396**
Compatible fluids		Suitable for antifreeze and windshield washing liquid	
Suction tube upper body		Stainless steel AISI 304	
Suction tube		Stainless steel AISI 304	
Air inlet connection	bsp	F 1/4" G	F 1/4" G
Fluid outlet connection	bsp	F 1/2" G	F 1/2" G
Max. air consumption 8 bar	m^3/min	0,37	0,37
Noise level	dB	81	81
Air max. feed pressure	bar	6 - 8	6 - 8
Suitable for drums or tanks		 modular	suitable for drums 180-220 Kg
Packing	N° - m^3	1 - 0,10	1 - 0,020
Weight	Kg	5,3	7,4
Dimensions (A - B - C)	cm	41 - 0 - 0	41 - 94 - 3,4

Art. **33445**
Gun for antifreeze and windshield liquid with stainless steel rigid terminal

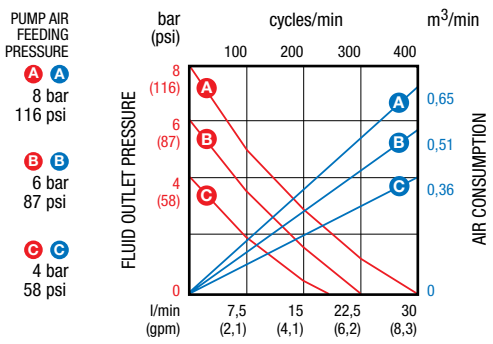

KIND OF FLUID: windshield washing fluid with water

Air-operated INDUSTRIAL PUMPS S/STEEL AISI 304

industrial fluids

Ratio 6:1
Flow rate 42 l/min

Ratio 9:1
Flow rate 42 l/min

Series 900 - 1200 divorced stainless steel AISI 304 industrial air-operated pumps for medium-long distance distribution. They are suitable to transfer aggressive fluids compatible with the wet parts of the pump (stainless steel and teflon). The high quality of the components ensures lasting and reliable operationeven in extreme conditions

		series 900		series 1200
		divorced		divorced
Article with seals in TEFLON			95D/61	120D/91
TEFLON+UHMW-PE		94D/61		
Compatible fluids		Chemical and industrial fluids		Chemical and industrial fluids
Suction tube upper body		Stainless steel AISI 304		Stainless steel AISI 304
Suction tube		Stainless steel AISI 304		Stainless steel AISI 304
Air inlet connection	bsp	F 1/2"	F 1/2"	F 1/2"
Fluid inlet connection	bsp	F 1.1/4"	F 1"	F 1"
Fluid outlet connection	bsp	F 3/4"	F 3/4"	F 3/4"
Max. air consumption 8 bar	m³/min	1,6	1,6	2,8
Noise level	dB	80	80	80
Air max. feed pressure	bar	8	8	8
Suitable for drums or tanks		 modular	 modular	 modular
Packing	N° - m³	1 - 0,045	1 - 0,045	1 - 0,045
Weight	Kg	14,5	14,5	15,5
Dimensions (A - B - C)	cm	36 - 48 - 6,0	36 - 48 - 6,0	36 - 48 - 6,0

PUMP AIR FEEDING PRESSURE

A A 8 bar 116 psi

B B 6 bar 87 psi

C C 4 bar 58 psi



KIND OF FLUID: SAE30 oil (ISO VG 100) - 20 °C



KIND OF FLUID: SAE30 oil (ISO VG 100) - 20 °C