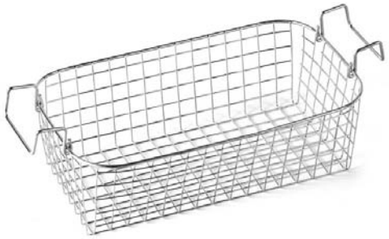

SERIE CK-EXPORT
CK-EXPORT SERIES

FIELDS OF APPLICATION:
- Precision mechanics workshops
- Electronic laboratories for washing printed circuits
- Car repair shops and specialist shops for fuel and diesel injection parts and for cleaning carburetors, electric injectors, small mechanic parts, armatures, stators, etc.
- Workshops for painting guns cleaning

I CAMPI DI UTILIZZO:
- Laboratori di meccanica di precisione (lavaggio minuterie)
- Laboratori di elettronica per lavaggio circuiti stampati
- Autofficine e specialisti iniezione benzina e diesel per pulitura carburatori, elettroiniettori, piccola minuteria meccanica, indotti, statori ecc.
- Carrozzerie per pulizie pistole di verniciatura

Modelli disponibili / Available models	CK 2 Cod. 02.009.15	CK 3 02.009.13	CK 6 02.009.16	CK 9* 02.009.17	CK 13 02.009.24	CK 27 02.009.25
Dimensioni vasca Tank size (mm)	150x140x100	240x140x100	300x155x150	300x240x150	330x300x150	500x295x200
Dimensioni esterne (mm) External size (mm)	180x170x240	270x170x240	330x170x310	330x270x310	360x330x310	530x330x360
Capacità (lt.) Tank capacity (lt.)	2	3	6	9,5	13	27
Potenza ultrasuoni Ultrasound power (W)	60W	120W	180W	240W	360W	600W
Frequenza standard (KHz) Standard frequency (KHz)	40	40	40	40	40	40
Alimentazione Power Supply	220 V 50/60 Hz	220 V 50/60 Hz	220 V 50/60 Hz	220 V 50/60 Hz	220 V 50/60 Hz	220 V 50/60 Hz
Potenza riscaldamento (W) Heating power (W)	100W	100W	300W	300W	400W	500W
Cestello Basket	non incluso not included	√	√	√	√	√
Rubinetto di scarico Discharge valve	-	-	-	√	√	√

NUOVA SERIE LAVATRICI AD ULTRA SUONI INDUSTRIALI
NEW SERIES OF ULTRA SOUND INDUSTRIAL WASHING MACHINES

FIELDS OF APPLICATION:
- Applicazioni settore auto: lavaggio testate motori, cerchi in lega, particolari metallici di medie dimensioni.
- Utilizzare solo detergenti a base acquosa a temperatura ≥70°
- Cestello di lavaggio incluso

I CAMPI DI UTILIZZO:
- Applicazioni settore auto: lavaggio testate, motori, cerchi in lega, particolari metallici di medie dimensioni.
- Utilizzare solo detergenti a base acquosa a temperatura ≥70°
- Cestello di lavaggio incluso

Modelli disponibili / Available models	CK 800 Cod. 02.009.22	CK 2000 02.009.23	CK 2400 02.009.18	CK 3600 02.009.19	CK 4800 02.009.20	CK 6000 02.009.21
Dimensioni vasca Tank size (mm)	450x350x300	750x400x400	750x550x500	1000x550x560	1200x600x600	1400x800x700
Dimensioni esterne (mm) External size (mm)	770x490x740	1100x500x740	1200x780x820	1180x800x900	1380x950x950	1700x980x960
Capacità (lt.) Tank capacity (lt.)	45	120	200	300	430	780
Potenza ultrasuoni Ultrasound power (W)	0,8Kw	2Kw	2,4Kw	3,6Kw	4,8Kw	6,0Kw
Frequenza standard (KHz) Standard frequency (KHz)	28	28	28	28	28	28
Alimentazione Power Supply	400 V 50Hz 3 phases	400 V 50Hz 3 phases	400 V 50Hz 3 phases	400 V 50Hz 3 phases	400 V 50Hz 3 phases	400 V 50Hz 3 phases
Potenza riscaldamento (W) Heating power (W)	2 Kw	6 Kw	6 Kw	9 Kw	9 Kw	12 Kw
Cestello incluso Basket included	√	√	√	√	√	√
Rubinetto di scarico incluso Discharge valve included	√	√	√	√	√	√

Cod. 03.036.17

>Vasca lavaggio da 75lt
con pompa elettrica 230V 50Hz
Dimensioni imballo: 790x550x320mm
Peso: 28 kg

>75lts Cleaning tank
with electric pump 230V 50Hz
Packaging dimensions: 790x550x320mm
Weight: 28 kgs