SMD LED

PORTABLE SMD LED LAMP SERIE 100

2,5W

LUX: 750 @ 50 cm
LUMEN: 250
LIGHTING ANGLE: 80°

SERIE 100

6 SMD LED

IP 64

IK09

REPLACEABLE TRANSPARENT COVER

ENERGY SAVING

REPLACEABLE TRANSPARENT COVER

SOFT TOUCH HANDLE

PROTECTED SWITCH

ALSO SUITABLE FOR CABLE REEL APPLICATION

ENG TECHNICAL FEATURES
- Luminous source SMD LED
- Protected soft touch switch
- Rotating hook
- Available in 100-230 or 12-24 V power supply, with or without cable

FRA CARACTERISTIQUES TECHNIQUES
- Source de lumière: LED SMD
- Interrupteur soft touch protegé
- Crochet orientable
- Disponibles en alimentation 100-230 ou 12-24 V, avec ou sans cable

GER TECHNISCHE MERKMALE
- Lichtquelle: SMD LED
- Soft-touch Schalter
- Verstellbarer Haken
- Erhältlich in 100-230 oder 12-24 V Stromversorgung, mit oder ohne Kabel

ESP CARACTERISTICAS TECNICAS
- Fuente del luz: LED SMD
- Interruptor blando protegido
- Gancho orientable
- Disponible en alimentacion 100-230 o 12-24 V, con o sin cable

ART.	31100 230 V	30100 230 V	31100 24 V	30100 24 V
Description	**Lamp with cable**	**Lamp without cable**	**Lamp with cable**	**Lamp without cable**
Light Source	6 SMD LED	6 SMD LED	6 SMD LED	6 SMD LED
Cable length	10 m	/	10 m	/
Cable Type	H05 RN F	/	H05 RN F	/
Supply voltage	110 - 240 V	110 - 240 V	12-24 Vdc-ac	12-24 Vdc-ac
Power	2,5 W	2,5 W	2,5 W	2,5 W
Lamp protection degree	IP 64	IP 64	IP 64	IP 64
	130	130	130	130
	360x120x95 mm 1,2 Kg	360x120x95 mm 0,6 Kg	360x120x95 mm 1,2 Kg	360x120x95 mm 0,6 Kg

SPARE PARTS

ART. 39100/V - Transparent cover / Calotte transparente / Durchsichtige Abdeckplatte / Casquete transparente

CAUTION: Use with different feedings damages the lamp and no warranty will be applied.

ATTENTION: Courants différénts endommagent la baladeuse et la garantie n'est plus valable.

DIMENSIONS

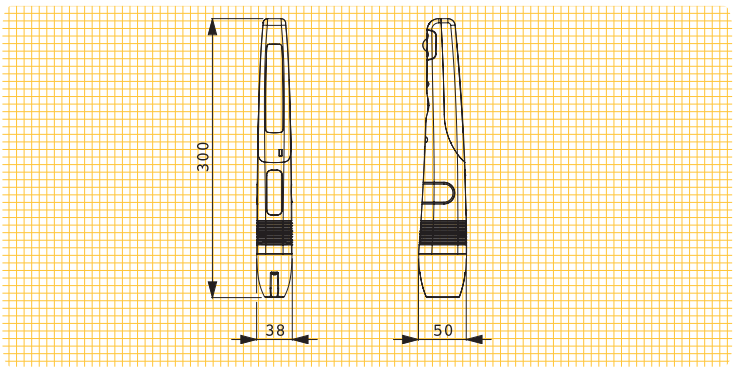

EN 60598-1 EN 60598-2-8
EN 60335-1

CE

2014/35/UE 2014/30/UE
2011/65/UE