SMD LED

SERIE AL REEL + SERIE 100

NO TRANSFORMER

ALUMINIUM BODY

2,5W

LUX: 750 @ 50 cm
LUMEN: 250
LIGHTING ANGLE: 80°
SERIE 100

6 SMD LED

LAMP IP 64

IK09

REPLACEABLE TRANSPARENT COVER

ENERGY SAVING

CABLE LENGTH: 15,5 m (14+1,5)
INCOMING CABLE: 1 m
CABLE TYPE: H05 RN-F - 2x1 mm²
REEL PROTECTION DEGREE: IP42

ENG **LAMP FEATURES**
· Luminous source SMD LED
Available in two versions:
230V power supply and 24V power supply.

FRA **CARACTERISTIQUES DE LA BALADEUSE**
· Source de lumière: SMD LED
Disponible en deux modèles: alimentation 230V et 24V.

GER **LAMPENEIGENSCHAFTEN**
· Lichtquelle: SMD LED
Lieferbar in 2 ausführungen: 230V und 24V Stromversorgung.

ESP **CARACTERISTICAS DE LA LAMPARA**
· Fuente de luz: SMD LED
Suministrado en dos versiones: con alimentacion a 230V y con alimentacion a 24V.

ART.	AL47/100 230V	AL47/100 24V
Description	Cable reel with SMD LED lamp 230V	Cable reel with SMD LED lamp 24V
cable length	15,5 m (14 + 1,5)	15,5 m (14 + 1,5)
lamp model	100 230V	100 24V
supply voltage	110-230V	12V dc/ac - 24V dc/ac
	40	
	mm 390x310x200 Kg 6	

CAUTION: Use with different feedings damages the lamp and no warranty will be applied.
ATTENTION: Courants différénts endommagent la baladeuse et la garantie n'est plus valable.
ACHTUNG: Andere Strömungen beschädigen der Lampe und die Garantie wird nicht geleistet.

YES
TRANSFORMER

ALUMINIUM BODY

CABLE LENGTH: 15,5 m (14+1,5)
INCOMING CABLE: 1 m
CABLE TYPE: H05 RN-F - 2x1 mm²
REEL PROTECTION DEGREE: IP42

ENG The model with transformer allows to have the lamp feeded at low voltage (24V), as requested by the safety rules.

FRA Le modèle avec transformateur permet d'avoir la baladeuse alimentée à basse tension (24V), comme prévu par les normes de sécurité.

GER Das Model mit Trafo erlaubt die Lampe mit Niederspannung (24V) gemäß den Sicherheitsnormen zu versorgen.

ESP El modelo con transformador permite de alimentar la lampara en baja tension (24V) ségun las normas de Seguridad.

ART.	AL 48/100
Description	Cable reel with transfo + SMD LED lamp
cable length	15,5 m (14 + 1,5)
transfo features	power: 14VA input: 230V output: 24V
supply voltage	230V
1	40
	mm 390x310x200 Kg 6

DIMENSIONS

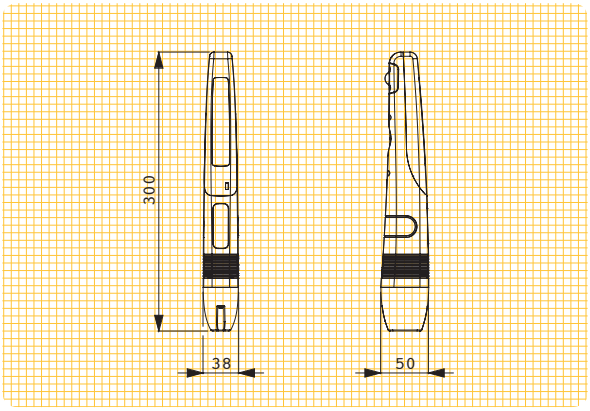

SPARE PARTS

ART. 39100/V
Transparent cover / Calotte transparente
Durchsichtige Abdeckplatte / Casquete transparente.