# Beta Action

**VRIJEDI DO 31/12/2024**

**CIJENE BEZ PDV - RABAT 40%**

**2024**

LUMBERTRANS d.o.o. 051/274-477 lumbertrans@ri.t-com.hr www.lumbertrans.com

# Beta RSC50

## Configure your workshop in 3D online

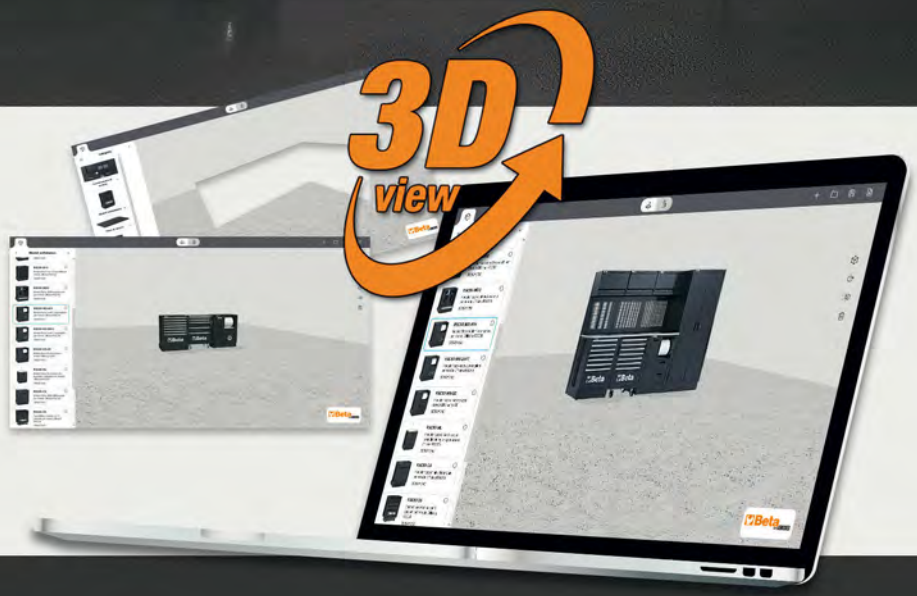

# Beta RSC 55

## MODULAR SYSTEM

**Configure your workshop in 3D online**

# INDEX


WORKSHOP EQUIPMENT C45PRO - RSC50 - RSC55 2÷4

CONTAINERS 5÷9

ASSORTMENT AND THERMOFORMED TRAYS 10÷14

WORKBENCHES 15

TROLLEYS AND BASKETS 16÷18

TOOL BAGS 19÷21

WRENCHES 22÷26

COLOR CODE ITEMS 26-27

SCREWDRIVERS 28-29

SOCKETS 30÷32

TORQUE WRENCHES 33-34

PLIERS 35÷37

DRILLING AND THREADING TOOLS 38-39

HAMMERS AND CHISELS 40

MEASURING TOOLS 41÷43

WELDING 44÷46

PLUMBING TOOLS 47

GENERAL MAINTENANCE TOOLS 48-49

LIGHTING AND REELS 50÷54

1000V INSULATED TOOLS 55-56

CUTTING TOOLS 57-58

POWER TOOLS 59-60

BETA ABRASIVES 61-62

AUTOMOTIVE 63÷89

ROBUR 90-91

PNEUMATIC TOOLS 91÷97

SAFETY FOOTWEAR 98÷104

WORKWEAR 105÷111

BETA COLLECTION 112


The images are for reference only. Beta Utensili S.p.A. reserves the right to update and upgrade its product range without notice.

## C45PRO

***Workshop equipment combination C45PRO comprising:***

- 1 fixed module with 7 drawers (C45PRO M7)
- 1 fixed service module (C45PRO MS)
- 1 mobile roller cab with 7 drawers (C45PRO C7)
- 1 two-door tool cabinet (C45PRO AS2)
- 3 perforated tool panels (C45PRO PF)
- 3 wall-mounted cabinets (C45PRO PM)
- 3 wall brackets, wide type (C45PRO SL)
- 1 wall bracket, narrow type (C45PRO SS)



### C45PRO X 045000001

**€ 4.990,00**

305 kg

- Worktop made of stainless steel coated MDF 2 m (C45PX/3-2,0MT)

### C45PRO W 045000002

**€ 4.860,00**

303 kg

- Multi-ply wood worktop 2 m (C45PW/3-2,0MT)

## C45PRO D

***Workshop equipment combination C45PRO comprising:***

- 1 fixed module with 7 drawers (C45PRO M7)
- 1 mobile roller cab with 7 drawers (C45PRO C7)
- 1 fixed service module (C45PRO MS)
- 1 fixed module with 5 drawers (C45PRO M5)
- 1 fixed module with 2 doors (C45PRO MA)
- 5 perforated tool panels (C45PRO PF)
- 5 wall-mounted cabinets (C45PRO PM)
- 7 wall brackets, wide type (C45PRO SL)
- 2 wall brackets, narrow type (C45PRO SS)
- 2 single-door tool cabinets (C45PRO AS1)

### C45PRO DX 045000031

**€ 9.880,00**

572 kg

- 1 worktop made of stainless steel coated MDF 2 m (C45PX/3-2,0MT)
- 1 worktop made of stainless steel coated MDF 1,3 m (C45PX/2-1,3MT)
- 1 self-supporting complete corner with stainless steel coated MDF worktop (C45PRO CORNER/X)

### C45PRO DW 045000032

**€ 9.550,00**

568 kg

- 1 multi-ply wood worktop 2 m (C45PW/3-2,0MT)
- 1 multi-ply wood worktop 1,3 m (C45PW/2-1,3MT)
- 1 self-supporting complete corner with wood worktop (C45PRO CORNER/W)

# We at Beta keep investing in Italian-made production and are proud to THE NEW WORKSHOP EQUIPMENT RANGE, RSC50

NEW!

Beta RSC50

***Based on the expertise acquired with the two existing workshop equipment ranges, RSC55 and C45PRO, which allowed us to listen to and fully understand professional users' requirements, the project for the new range, RSC50, relies on the following pivotal concepts: QUALITY, FUNCTIONALITY AND STURDINESS, EFFICIENCY, FLEXIBILITY and COMPATIBILITY***

## RSC50 I

050001045

**€ 18.810,00**

***Workshop equipment combination RSC50 comprising:***

- 1 2.240 mm worktop (RSC50 PG/3-2,2MT)
- 1 1.495 mm worktop (RSC50 PG/2-1,5MT)
- 1 fixed module with 7 drawers (RSC50 M7)
- 1 mobile roller cab with 7 drawers (RSC50 C7)
- 1 fixed service module with 2 drawers (RSC50 MS-2C)
- 1 self-supporting complete corner (RSC50 AC-G)
- 1 fixed module with 5 drawers (RSC50 M5)
- 1 fixed two-door module (RSC50 MA)
- 5 wall-mounted cabinets (RSC50 PM)
- 5 upper perforated tool panels (RSC50 PFS)
- 5 lower perforated tool panels (RSC50 PFI)
- 5 pairs of right/left uprights (RSC50 P/2MDX-SX)
- 2 single-door cabinets (RSC50 A1)

2000 mm
690 mm
3530+2785 mm

625 kg

## RSC50 F

050001030

**€ 10.760,00**

***Workshop equipment combination RSC50 comprising:***

- 1 2.240 mm worktop (RSC50 PG/3-2,2MT)
- 1 fixed module with 7 drawers (RSC50 M7)
- 1 mobile roller cab with 7 drawers (RSC50 C7)
- 1 fixed service module with 2 drawers (RSC50 MS-2C)
- 3 wall-mounted cabinets (RSC50 PM)
- 3 upper perforated tool panels (RSC50 PFS)
- 3 lower perforated tool panels (RSC50 PFI)
- 3 pairs of right/left uprights (RSC50 P/2MDX-SX)
- 1 two-door cabinet (RSC50 A2)

2000 mm
690 mm
3155 mm

361 kg

## C55PB-PRO/9A 055000067 € 13.950,00 NEW!

### *Workstation for workshop equipment combination RSC55*

Combination comprising:
**C55B/2.8**
Workbench with worktop 2850x700 mm covered with a shockproof, nonscratch, ABS coat resistant to oil and hydrocarbons.
**C55M7**
Fixed module with seven drawers (588x367 mm), with ball bearing slides
**C55MA**
Fixed two-door module
**C55M4**
Fixed module with four drawers (588x367 mm), with ball bearing slides
**C55PM + C55PT1,0x0.6 + C55/PF**
- 2 suspended cabinets (1024x400x300 mm) fitted with gas springs
- 2 under-cabinet panels (1024x620x25 mm)
- 2 perforated under-cabinet tool panels (1024x620x25 mm)

**C55PM/M0.8 + C55PT0.8x0.6 + C55/1PF**
- 1 suspended cabinet (800x400x300 mm) fitted with gas springs
- 1 under-cabinet panel (800x620x25 mm)
- 1 perforated under-cabinet tool panel (800x620x25 mm)

**C55A2**
- 1 two-door tool cabinet

## C55PB-PRO/10 055000068 € 13.260,00 NEW!

### *Workstation for workshop equipment combination RSC55*

Combination comprising:
**C55B/2.8**
Workbench with worktop 2850x700 mm covered with a shockproof, nonscratch, ABS coat resistant to oils and hydrocarbons.
**C55MS**
Fixed service module
**C55C7**
Mobile roller cab with seven drawers (588x367 mm), with ball bearing slides
**C55M7**
Fixed module with seven drawers (588x367 mm), with ball bearing slides
**C55PM + C55PT1,0x0,6 + C55/PF**
- 2 suspended cabinets (1024x400x300 mm) fitted with gas springs
- 2 under-cabinet panels (1024x620x25 mm)
- 2 perforated under-cabinet tool panels (1024x620x25 mm)

**C55PM/M0.8 + C55PT0.8x0.6 + C55/1PF**
- 1 suspended cabinet (800x400x300 mm) fitted with gas springs
- 1 under-cabinet panel (800x620x25 mm)
- 1 perforated under-cabinet tool panel (800x620x25 mm)

## C37

### *Mobile roller cab*

- Sturdy multi-purpose worktop
- Quick release system made of aluminium, opening throughout length of drawer
- **Corner bumpers** throughout height of roller cab, to avoid damaging vehicles in garage
- 4 castors Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Tote-trays and holes for accommodating screwdrivers
- Built-in side bottle and paper holders, adjustable in several positions




71 kg

## C37A/7

*Mobile roller cab with 7 drawers **WITH ANTI-TILT SYSTEM***




| n° | | Max |
|---|---|---|
| 5 | 75 mm | 30 kg |
| 1 | 150 mm | 35 kg |
| 1 | 225 mm | 35 kg |

| | Ral 2011 | Ral 7016 | Ral 3000 | n° | | max | kg | € |
|---|---|---|---|---|---|---|---|---|
| C37/6 | 037000061 | 037000062 | 037000063 | 4<br>1<br>1 | 75 mm<br>150 mm<br>305 mm | 30 kg<br>35 kg<br>40 kg | 69 | € 1.280,00 |
| C37/7 | 037000071 | 037000072 | 037000073 | 5<br>1<br>1 | 75 mm<br>150 mm<br>225 mm | 30 kg<br>35 kg<br>35 kg | 71 | € 1.325,00 |
| C37/8 | 037000081 | 037000082 | 037000083 | 6<br>2 | 75 mm<br>150 mm | 30 kg<br>35 kg | 73 | € 1.375,00 |

| Ral 2011 | Ral 7016 | Ral 3000 |
|---|---|---|
| 037000271 | 037000272 | 037000273 |

**€ 1.360,00**

## C39

### *Mobile roller cab*

- Sturdy multi-purpose worktop with tote-trays and holes for accommodating screwdrivers
- 4 castors with steel cores, Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Pull-out drawer with opening system throughout its length
- Built-in side and rear bottle and paper holders

***UPRIGHTS AND DRAWER FRONT MADE OF ALUMINIUM ALLOY***
***+ STURDINESS***
***+ LIGHTWEIGHTNES***






| | Ral 2011 | Ral 7016 | Ral 3000 | n° | | max | kg | € |
|---|---|---|---|---|---|---|---|---|
| C39/6 | 039000031 | 039000032 | 039000033 | 4<br>1<br>1 | 70 mm<br>140 mm<br>280 mm | 30 kg<br>35 kg<br>40 kg | 59 | € 1.890,00 |
| C39/7 | 039000001 | 039000002 | 039000003 | 5<br>1<br>1 | 70 mm<br>140 mm<br>210 mm | 30 kg<br>35 kg<br>35 kg | 61 | € 1.995,00 |
| C39/8 | 039000041 | 039000042 | 039000043 | 6<br>2 | 70 mm<br>140 mm | 30 kg<br>35 kg | 64 | € 2.130,00 |

# THE EVOLUTION OF PERFECTION! DISCOVER THE RSC RANGE!

The RSC range has been designed to satisfy all professionals' requirements and ensure reliability as well as high operation performance. The innovative design, inspired by the racing world, provides these mobile roller cabs and trolleys with a captivating, unique style: the 7 colours and its finish make the RSC range synonymous with one-of-a-kind products in the market. The sturdy frameworks and the materials result in high quality and remarkable durability, thereby effectively supporting the daily work of industrial production departments, mechanics, car body repairers and general maintenance service providers. What is more, most RSC roller cabs are TÜV certified. This prestigious certification - which is the name for safety and guaranteed quality - is obtained upon successful completion of severe tests under the EK5/TA5 protocol.

## RSC24

### *Mobile Roller cab*

- ABS reinforced worktop
- Multi-purpose top with anti-fall edges and eight holes for accommodating screwdrivers
- Drawer bases protected by foamed rubber mats
- 4 castors Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Each drawer can accommodate **up to 4 EVA foam or ABS thermoformed trays**
- Front centralized safety lock
- Static load capacity: 800 kg
- Built-in bottle holder (can be applied on both sides).

**The following accessories can be added:**

- Wood worktop 2400 RSC24/PL
- Perforated tool panel 2400 RSC24/PF
- Folding shelf 2400 RSC24/MP
- Document holder 2400 RSC24/PD
- Paper roll holder 2400 RSC24/PC
- Computer wall bracket 2400 RSC24/SPC

| | Ral 2011 | Ral 2011 / Ral 7016 | Ral 9006 / Ral 7016 | Ral 3000 / Ral 7016 | Ral 5015 / Ral 7016 | Ral 7016 | Ral 9005 | kg | € |
|---|---|---|---|---|---|---|---|---|---|
| RSC24/5 | 024004050 | 024004051 | 024004052 | 024004053 | 024004056 | 024004057 | 024004059 | 60 | € 949,00 |
| RSC24/6 | 024004060 | 024004061 | 024004062 | 024004063 | 024004066 | 024004067 | 024004069 | 62 | € 1.022,00 |
| RSC24/7 | 024004070 | 024004071 | 024004072 | 024004073 | 024004076 | 024004077 | 024004079 | 63 | € 1.099,00 |
| RSC24/8 | 024004080 | 024004081 | 024004082 | 024004083 | 024004086 | 024004087 | 024004089 | 66 | € 1.187,00 |

55% RABAT

| RSC24/5 | | |
|---|---|---|
| n° | | Max |
| 2 | 70 mm | 25 kg |
| 2 | 140 mm | 30 kg |
| 1 | 280 mm | 35 kg |

| RSC24/6 | | |
|---|---|---|
| n° | | Max |
| 4 | 70 mm | 25 kg |
| 1 | 140 mm | 30 kg |
| 1 | 280 mm | 35 kg |

| RSC24/7 | | |
|---|---|---|
| n° | | Max |
| 5 | 70 mm | 25 kg |
| 1 | 140 mm | 30 kg |
| 1 | 210 mm | 30 kg |

| RSC24/8 | | |
|---|---|---|
| n° | | Max |
| 6 | 70 mm | 25 kg |
| 2 | 140 mm | 30 kg |



## RSC24AXL

### *Mobile roller cab, WITH ANTI-TILT SYSTEM, long model*

- New ABS reinforced worktop with anti-fall edges, eight holes for accommodating screwdrivers and 6 tote trays
- **Sturdy nylon front, with built-in label holder.**
- Drawer bases protected by foamed rubber mats
- 4 castors, Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Built-in side bottle holder (can be applied on both sides)
- Each drawer can accommodate **up to 6 EVA foam or ABS thermoformed trays**

**Following accessories can be added:**
- Wood worktop 2400 RSC24/PL
- Document holder 2400 RSC24/PD-A
- Paper roll holder 2400 RSC24/PC-A






| | Ral 2011 / Ral 7016 | Ral 3000 / Ral 7016 | Ral 7016 | n° | | max | kg | € |
|---|---|---|---|---|---|---|---|---|
| RSC24AXL/7 | 024004271 | 024004273 | 024004277 | 5<br>1<br>1 | 70 mm<br>140 mm<br>210 mm | 30 kg<br>35 kg<br>35 kg | 84 | € 1.545,00 |
| RSC24AXL/8 | 024004281 | 024004283 | 024004287 | 6<br>2 | 70 mm<br>140 mm | 30 kg<br>35 kg | 88 | € 1.655,00 |
| RSC24AXL/9 | 024004291 | 024004293 | 024004297 | 8<br>1 | 70 mm<br>140 mm | 30 kg<br>35 kg | 90 | € 1.760,00 |

## RSC24L/7

### *Mobile roller cab with 7 drawers and side shelves*

- 7 drawers (588x367 mm) with ball bearing slides
- Drawer bases protected by foamed rubber mats
- 4 castors, Ø 125 mm: 2 fixed and 2 steering with brakes
- Front centralized lock
- Multi-ply wood worktop with holes for a vice (1599F/100 - 1599GI/100, to be ordered separately)
- **Side compartment with vertically adjustable shelf**
- Built-in paper roll holder
- Double rear bottle holder




80 kg

| Ral 2011 / Ral 7016 | Ral 3000 / Ral 7016 | Ral 7016 |
|---|---|---|
| 024004371 | 024004373 | 024004377 |

**€ 1.670,00**

| n° | | Max |
|---|---|---|
| 5 | 70 mm | 25 kg |
| 1 | 140 mm | 30 kg |
| 1 | 210 mm | 30 kg |



## RSC24AXLP/7 NEW!

### *Mobile roller cab with 7 drawers, with wood worktop and ANTI-TILT SYSTEM, long model*

- Long model with 7 fully removable drawers (882x367 mm), with ball bearing slides
- Multi-ply wood worktop with holes for a vice 1599F/100 or 1599GI/100 (to be ordered separately)
- Sturdy nylon front, with built-in label holder
- Drawer bases protected by foamed rubber mats
- 4 castors, Ø 125 mm: 2 fixed and 2 steering (one with brake)
- Front centralized safety lock
- Built-in side bottle holder (can be applied on both sides)
- Built-in paper roll holder
- Each drawer can accommodate **up to 6 EVA foam or ABS thermoformed trays**

**Following accessories can be added:**

- Perforated tool panel with supports 2400 RSC24AXLP/PF
- Computer bracket 2400 RSC24/SPC
- Side tool tray 2400 RSC24AXLP/VL
- Waste bin 2400 RSC24AXLP/CPR
- Folding side shelf 2400 RSC24/MP

| Ral 2011 | Ral 3000 | Ral 7016 |
|---|---|---|
| Ral 7016 | Ral 7016 | |
| 024004571 | 024004573 | 024004577 |

**€ 1.775,00**




| n° | | Max |
|---|---|---|
| 5 | 70 mm | 30 kg |
| 1 | 140 mm | 35 kg |
| 1 | 210 mm | 35 kg |

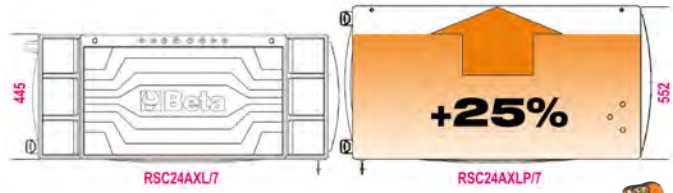

## RSC28

### *SuperTank trolley with wood worktop and 10 drawers*

- 10 drawers (588x367 mm) with ball bearing slides
- Quick, safe system for opening and closing drawers, with nylon and fibreglass front
- **5 side drawers:**
  4 drawers, 70 mm high
  1 drawer, 210 mm high
- **5 front drawers:**
  4 drawers, 70 mm high
  1 drawer, 210 mm high
- Drawer bases protected by foamed rubber mats.
- 4 high-capacity castors, Ø 150 mm: 2 fixed and 2 steering with brakes
- 2 centralized safety locks
- 3 front tool drawers
- Multi-ply wood worktop with holes for a vice (1599F/150 - 1599GI/150, to be ordered separately)
- Built-in tool compartment

| Ral 2011 | Ral 3000 | Ral 7016 |
|---|---|---|
| Ral 7016 | Ral 7016 | |
| 028003001 | 028003003 | 028003007 |

**€ 3.030,00**




| n° | | Max |
|---|---|---|
| 8 | 70 mm | 25 kg |
| 2 | 210 mm | 30 kg |

- Side compartment with foldaway door with lock
- Built-in bottle holders
- 135-mm-high storage compartment with plastic-covered base

## RSC51

### *Service tool trolley with 3 drawers*

- 3 drawers (588x367 mm) with ball bearing slides, 70 mm high
- ABS reinforced worktop, solid and sturdy
- Multipurpose top with anti-fall edges and 8 holes for accommodating screwdrivers
- Drawer bases protected by foamed rubber mats
- Each drawer can accommodate up to 4 EVA foam or ABS thermoformed trays
- Front centralized safety lock
- Convenient side screwdriver holder included
- Two built-in side spray can holders
- Large lower shelf protected by an anti-oil and anti-petrol rubber mat
- 4 castors, Ø 125 mm: 2 fixed castors and 2 swivel castors (one with brake)
- Static load capacity: 400 kg
- Capacity of each drawer: 15 kg, evenly distributed

890 mm × 460 mm × 770 mm

38 kg

**COMPLETELY CHANGED AND CUSTOMIZABLE WITH ACCESSORIES!**

| Ral 2011 | Ral 3000 | Ral 7016 |
|---|---|---|
| Ral 7016 | Ral 7016 | |
| 051000300 | 051000303 | 051000307 |

**€ 625,00**




| n° | | Max |
|---|---|---|
| 3 | 70 mm | 15 kg |

**Following accessories can be added:**

- Wood worktop 2400 RSC24/PL
- Perforated tool panel 2400 RSC24/PF
- PC support 2400 RSC24/SPC
- Folding shelf 2400 RSC24/MP
- Paper roll holder 2400 RSC24/PC-A

***A MUST-HAVE FOR YOUR GARAGE!***

## C04TSS/7

024003077

**€ 2.770,00**

### *Mobile roller cab with 7 drawers*

**MADE OF STAINLESS STEEL**

- 7 drawers (570 x 410 mm) with ball bearing slides.
- 4 castors Ø 125 mm 2 fixed and 2 steering (two with brakes)
- Front centralized lock
- Frame made entirely of stainless steel AISI 304
- Castors, supports, ball bearings, drawer interiors and guides made of stainless steel
- Drawer handles made of aluminium

935 mm × 470 mm × 680 mm

63 kg







| n° | | Max |
|---|---|---|
| 6 | 83 mm | 25 kg |
| 1 | 170 mm | 30 kg |

***NON-MARKING WHEELS***

## 5988VU/M 059880356 € 3.190,00

### *Assortment of 214 tools in soft foam tray*

**Recommended with: RSC24 - RSC24A - RSC24AXL - RSC24AXLP/7 - C37 - C39 - C39SM - C39MD - RSC28 - C59 - RSC50 - RSC55**

| Quantity | Description | Beta N. | TR |
|---|---|---|---|
| 22 | combination wrenches 6-7-8-9-10-11-12-13-14-15-16-17 18-19-20-21-22-24-27-30-32-36 mm | 42 | M01 |
| 11 | double open end wrenches 6x7-8x9-10x11-12x13-14x15 16x17-18x19-20x22-21x23-24x27-30x32 mm | 55 | M30 |
| 11 | double ended offset ring wrenches 6x7-8x9-10x11-12x13-14x15- 16x17-18x19-20x22-21x23-24x27-30x32 mm | 90 | M30 |
| 9 | ball head offset hexagon key wrenches ○ 1,5÷10 mm | 96BPC/SC9 | M30 |
| 1 | socket holder | 895/1 | M100 |
| 1 | socket holder | 895/3 | M100 |
| 1 | socket holder | 895/6 | M100 |
| 13 | 1/4" hexagon sockets ◎ 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm | 900 | M100 |
| 9 | hexagon hand sockets, long series ◎ 5-6-7-8-9-10-11-12-13 mm | 900L | M100 |
| 5 | 1/4" socket drivers for hexagon screws ○ 3-4-5-6-7 mm | 900ME | M100 |
| 4 | socket drivers for slotted head screws ◐ 0,8x4-1x5,5-1,2x6,5-1,2x8 mm | 900LP | M100 |
| 4 | socket drivers for cross head Phillips® screws ✪ PH1-PH2-PH3-PH4 | 900PH | M100 |
| 7 | socket drivers for Torx® head screws ✪ T10-T15-T20-T25-T27-T30-T40 | 900TX | M100 |
| 1 | 1/4" drive extension bar 50 mm | 900/20 | M100 |
| 1 | 1/4" drive extension bar 100 mm | 900/20L | M100 |
| 1 | 1/4" drive extension bar 150 mm | 900/21 | M100 |
| 1 | 1/4" drive universal joint | 900/25 | M100 |
| 1 | 1/4" drive spinner handle | 900BG/30 | M100 |
| 1 | 1/4" drive swivel T-handle | 900/42 | M100 |
| 1 | 1/4" reversible ratchet ⊛ | 900/55 | M100 |
| 21 | 1/2" square drive hexagon sockets ◎ 8-10-11-12-13-14-15-16-17-18- 19-20-21-22-23-24-26-27-28-30-32 mm | 920A | M100 |
| 1 | adaptor, 1/2" female and 3/8" male drives 125 mm | 920/15 | M100 |
| 1 | 1/2" drive universal joint 250 mm | 920/25 | M100 |
| 1 | 1/2" wobble extension bar 125 mm | 920AN/125 | M100 |
| 1 | 1/2" wobble extension bar 250 mm | 920AN/250 | M100 |
| 1 | 1/2" drive sliding T-handle 305 mm | 920/42 | M100 |
| 1 | 1/2" drive reversible ratchet ⊛ | 920/55 | M100 |
| 8 | 1/2" sockets for Torx® head screws ◎ 10-12-14-16-18-20-22-24 mm | 920FTX | M100 |
| 11 | hexagon hand sockets ◎ 10-12-13-14-15-16-17-18-19-21-22 mm | 920AL | M100 |
| 1 | circlip pliers straight, internal ⊙ 180 mm | 1032 | M129 |
| 1 | circlip pliers bent, internal ⊙ 170 mm | 1034 | M129 |
| 1 | circlip pliers straight, external ● 175 mm | 1036 | M129 |
| 1 | circlip pliers bent, external ● 175 mm | 1038 | M129 |
| 1 | circlip pliers bent, external ● 175 mm | 1048N | M129 |
| 1 | self - locking pliers 240 mm | 1052 | M129 |
| 1 | Diagonal cutting nippers ⟨ 160 mm | 1082BM | M129 |
| 1 | construction worker's pincers 220 mm | 1098 | M129 |
| 1 | tin snips 250 mm | 1112 | M129 |
| 1 | electrician's scissors, straight blades | 1128BM | M129 |
| 1 | half-round needle nose pliers ═ 180 mm | 1150BM | M129 |
| 1 | Extra-long needle nose pliers ◐ 160 mm | 1166BM | M129 |
| 1 | Extra-long bent needle nose pliers ◐ 160 mm | 1168BM | M129 |
| 6 | screwdriver for slotted head screws ◐ 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm | 1201E | M213 |
| 1 | screwdriver for slotted head screws, extra-short series ◐ 4x30 mm | 1201EN | M213 |
| 4 | screwdriver for cross head Phillips® screws ✪ PH0,60-PH1x80-PH2x100-PH3x150 mm | 1202E | M213 |

M01

M30



M213

M230

M129



M100

| | | | |
|---|---|---|---|
| 1 | screwdriver for cross head Phillips® screws, extra-short series ✪ PH1x30 mm | 1202EN | M213 |
| 12 | screwdrivers for Torx® head screws, with handles ✪ T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45" | 1207E/TX | M213 |
| 1 | mains testing screwdriver ◐ | 1253 | M213 |
| 3 | drift punches 2-3-4 mm | 30 | M230 |
| 6 | pin punches 2-3-4-5-6-8 | 31 | M230 |
| 1 | centre punch Ø 4 mm | 32 | M230 |
| 1 | flat chisels 150 mm | 34 | M230 |
| 2 | flat chisels, ribbed type 200-250 mm | 35 | M230 |
| 1 | cape chisels, standard type 125 mm | 36 | M230 |
| 1 | engineer's hammer 500 g | 1370 | M230 |
| 1 | soft face hammer Ø 35 mm | 1390 | M230 |
| 1 | measuring tape 3 m | 1692 | M230 |
| 1 | telescopic magnet with flexible head | 1712TF | M230 |
| 1 | second-cut square files 200 mm | 1719BMA...Q | M230 |
| 1 | second-cut triangular files 200 mm | 1719BMA...T | M230 |
| 1 | second-cut flat files 200 mm | 1719BMA...P | M230 |
| 1 | second-cut half-round files 200 mm | 1719BMA...M | M230 |
| 1 | second-cut round files 200 mm | 1719BMA...R | M230 |
| 1 | steel wire brush | 1737NX | M230 |
| 1 | snap - off blade utility knife 18 mm | 1771 | M230 |

## 5904VA/T 059040416 € 1.755,00

### *Assortment of 102 tools in ABS*

| Quantity | Description | Beta N. | TR |
|---|---|---|---|
| 21 | combination wrenches 6-7-8-9-10-11-12-13-14-15-16-17 18-19-20-21-22-24-27-30-32 mm | 42 | T05 +T06 |
| 8 | double open end wrenches 6x7-8x9-10x11-12x13-14x15 16x17-18x19-20x22 mm | 55 | T33 |
| 9 | offset hexagon key wrenches ○ 1,5÷10 mm | 96/SC9 | T33 |
| 6 | offset hexagon key wrenches ○ 2-2,5-3-4-5-6 mm | 96T | T52 |
| 8 | T - handle wrenches with swivelling socket ◎ 7-8-10-12-13-14-17-19 mm | 952 | T63 |
| 19 | 1/2" square drive hexagon sockets ◎ 10-11-12-13-14-15-16-17-18-19 20-21-22-23-24-26-27-30-32 mm | 920A | T83 |
| 1 | 1/2" drive extension bar 125 mm | 920/21 | T83 |
| 1 | 1/2" drive extension bar 255 mm | 920/22 | T83 |
| 1 | 1/2" drive universal joint | 920/25 | T83 |
| 1 | 1/2" drive sliding T-handle 305 mm | 920/42 | T83 |
| 1 | 1/2" drive reversible ratchet ⊛ | 920/55 | T83 |
| 1 | heavy-duty diagonal cutting nippers ⟨ 160 mm | 1084BM | T137 |
| 1 | half-round needle nose pliers ═ 180 mm | 1150BM | T137 |
| 1 | extra-long needle nose pliers ◐ 160 mm | 1166BM | T137 |
| 1 | circlip pliers straight, internal ⊙ 180 mm | 1032 | T145 |
| 1 | circlip pliers bent, internal ⊙ 170 mm | 1034 | T145 |
| 1 | circlip pliers straight, external ● 175 mm | 1036 | T145 |
| 1 | circlip pliers bent, external ● 175 mm | 1038 | T145 |
| 1 | self - locking pliers 240 mm | 1052 | T153 |
| 1 | slip joint pliers boxed joints 250 mm | 1048N | T153 |
| 7 | screwdrivers for cross head Phillips® screws ◐ 2,5x50 -3x75 - 3,5x100 - 4x125 -5,5x100 - 5,5x150 - 6,5x150 mm | 1260 | T199 |
| 6 | screwdrivers for cross head Phillips® screws ✪ ✪ PH0x60 - PH0x100 - PH1x80 - PH1x120 - PH2x100 - PH2x150 mm | 1262 | T202 |
| 2 | flat chisels, ribbed type 100-200 mm | 35 | T234 |
| 1 | engineer's hammer 300 g | 1370 | T234 |
| 1 | soft face hammer Ø 35 mm | 1390 | T234 |
| 1 | empty thermoformed tray | | VP5 |

**Recommended with:**
**RSC23T - RSC24 - RSC24A - RSC24AXL - RSC24AXLP/7 - RSC24L/7 - RSC24L-CAB - C37 - C39 - C39SM - C39MD - RSC28 - C59 - RSC50 - RSC55**



T199 T202 T83

T145 T153 T137 T234

T52 T33 T05 T06

T63 VP5

## M01 024500001 € 442,00

**42** 6-7-8-9-10-11-12-13-14-15-16-17-18
19-20-21-22-24-27-30-32-36 mm

## M30 024500030 € 421,00

**55** 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm
**90** 6x7-8x9-10x11-12x13-14x15-16x17-18x19-20x22-21x23-24x27-30x32 mm
**96BPC/SC9** 1,5-2-2,5-3-4-5-6-8-10 mm

## M44 024500044 € 287,00

**141** 8-9-10-11-12-13-14-15-16
17-18-19 mm

## M60 024500060 € 387,00

**96T** 2-2,5-3-4-5-6-7-8-10 mm
**97BTX/SC8** T9-T10-T15-T20-T25-T27-T30-T40 mm
**944BX** 5-6-7-8-10-13 mm

## M63 024500063 € 351,00

**952** 7-8-10-12-13-14-17-19 mm

## M100 024500100 € 1.220,00

**895/1 - 895/3 - 895/6**
**900** 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
**900L** 5-6-7-8-9-10-11-12-13 mm
**900ME** 3-4-5-6-7 mm
**900LP** 0,8x4-1x5,5-1,2x6,5-1,2x8 mm
**900PH** PH1-PH2-PH3-PH4
**900TX** T10-T15-T20-T25-T27-T30-T40
**900/20** 50 mm - **900/20L** 100 mm
**900/21** 150 mm
**900/25**
**900BG/30**
**900/42**
**900/55**
**920A** 8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-28-30-32 mm
**920/15 - 920/25**
**920AN/125** 125 mm
**920AN/250** 250 mm
**920/42**
**920/55**
**920FTX** 10-12-14-16-18-20-22-24 mm
**920AL** 10-12-13-14-15-16-17-18-19-21-22 mm

## M105 024500871 € 1.325,00

116 | 1/4" 3/8" 1/2"

7,7 kg

- 900 4-4,5-5-5,5-6-7-8-9-10 11-12-13-14 mm
- 900L 5-6-7-8-9-10-11-12-13 mm
- 96BPC/SC9 1,5-2-2,5-3-4-5-6-8-10 mm
- 895/1 - 895/3 - 895/6
- 900ME 3-4-5-6-7 mm
- 900LP 0,8x4-1x5,5-1,2x6,5-,2x8 mm
- 900PH PH1-PH2-PH3-PH4
- 900TX T10-T15-T20-T25-T27-T30-T40
- 900/16 □ 1/4 - ■ 3/8
- 900/... 50-100-150 mm
- 900/25 - 900BG/30 - 900/42
- 900/55
- 910A 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22 mm
- 910/15 □ 3/8 - ■ 1/4
- 910/16 □ 3/8 - ■ 1/2
- 910/21 125 mm
- 910/22 250 mm
- 910/25 - 910/42
- 910/55
- 920A 8-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-26-27-28-30-32 mm
- 920/15 □ 1/2 - ■ 3/8
- 920/25
- 920AN 125 - 250 mm
- 920/42
- 920/55
- 956E 16-17,8-20,8 mm

## M115 024500115 € 1.169,00

54 | 1/2"

7,8 kg

- 666/20 40÷200 Nm
- 920A 13-14-15-16-17-18-19-20-21-22-24-26-27-30-32 mm
- 920FTX 12-14-16-18-20-22-24 mm
- 920PE 6-7-8-8L-10-10L-12-12L-14-14L
- 920TX T20-T25-T27-T30-T40-T45-T50-T55-T60-T20L-T25L-T27L-T30L-T40L-T45L-T50L
- 920/21 125 mm
- 920/22 255 mm
- 920/25
- 920/42 305 mm
- 920/55

## M120 024500120 € 1.305,00

75 | 1/2"

6,9 kg

- 920A 10-11-12-13-14-15-16-17-18-19-20-21-22-24-26-27-30-32 mm
- 920AN/125 125 mm
- 920AN/250 250 mm
- 920/25 - 920/42
- 920AL 10-12-13-14-15-16-17-18-19-22-24-27-30-32 mm
- 920FTX 10-12-14-16-18-20-22-24 mm
- 920/55
- 920PE 5-5L-6-6L-7-7L-8-8L-10-10L-12-12L-14-14L
- 920TX T20-T25-T27-T30-T40-T45-T50-T55-T60-T20L-T25L-T27L-T30L-T40L-T45L-T50L

## M128 024500128 € 955,00

50 | 1/2"

8,9 kg

- 720 10-11-12-13-14-15-16-17-18-19-21-22-24-27-30-32 mm
- 720L 11-12-13-14-15-16-17-18-19-21-22-24-27-30-32 mm
- 720TX T30-T40-T45-T50-T55
- 720ME 5-6-8-10-12-14-17-19 mm
- 720LC 17-19-21 mm
- 720/21 125 mm
- 720/25

## M129 024500129 € 463,00

13

3,4 kg

- 1032 180 mm
- 1034 170 mm
- 1036 175 mm
- 1038 175 mm
- 1048N 250 mm
- 1052 240 mm
- 1082BM 160 mm
- 1098 220 mm
- 1112 250 mm
- 1128BM
- 1150BM 180 mm
- 1166BM 160 mm
- 1168BM 160 mm

## M133 024500133 € 86,50

3

- 1082G 160 mm
- 1150G 180 mm
- 1166G 160 mm

650 g

## M134 024500134 € 110,00

3

- 1082GBM 160 mm
- 1150GBM 180 mm
- 1166GBM 160 mm

750 g

## M162 024500162 € 151,00

8

1241 5,5x100-6,5x125-8x150-10x200 mm
1242 PH1x100-PH2x100-PH3x150-PH4x200 mm

1,4 kg

## M195 024500195 € 330,00

25

Beta GRIP

1260 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm
1260N 4x30 mm
1262 PH0x60-PH1x80-PH2x100-PH3x150 mm
1262 PH1X30 mm
1267TX T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45
1253 3,5x100 mm

2,3 kg

## M213 024500213 € 222,50

25

Beta EVOX

1,8 kg

1201E 2,5x50-3x75-4x100-5,5x125-6,5x150-8x200 mm
1201EN 4x30 mm
1202E PH0x60-PH1x80-PH2x100-PH3x150 mm
1202EN PH1X30 mm
1207E/TX T6-T7-T8-T9-T10-T15-T20-T25-T27-T30-T40-T45
1253

## M230 024500230 € 425,00

25

30 Ø 2-3-4 mm
31 Ø 2-3-4-5-6-8 mm
32 Ø 4 mm
34 150 mm
35 200-250 mm
36 125 mm
1370 500 g
1390 Ø 35 mm
1692 3 m
1712
1719BMA/Q 200 mm
1719BMA/T 200 mm
1719BMA/P 200 mm
1719BMA/M 200 mm
1719BMA/R 200 mm
1737
1771 18 mm

3,2 kg

## T01 024240001 € 269,00

17

2,7 kg

42 6-7-8-10-11-12-13-14-16-17-18-19-21- 22-24-27-30 mm

## T05 024240005 € 204,50

16

1,5 kg

42 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21 mm

## T06 024240006 € 145,50

5

2,1 kg

42 22-24-27-30-32 mm

## T31 024240031 € 227,00



27

3 kg

31 Ø 2-3-4-5-6 mm 32 Ø 4 mm
55 6x7-8x9-10x11-12x13-14x15-16x17-18x19 20x22-21x23-24x26-27x29-30x32 mm
96N/SC9 1,5÷10 mm

## T40 024240040 € 106,00

7

90 6x7-8x9-10x11-12x13-14x15-16x17-18x19 mm

810 g

## T45 024240045 € 316,00

12

142 8-9-10-11-12-13-14-15-16-17-18-19 mm

1,3 kg

## T50 024240050 € 178,50

11

96T 2-2,5-3-3,5-4-4,5-5-6-7-8-10 mm

1,3 kg

## T55 024240055 € 101,00

6

97TTX T10-T15-T20-T25-T27-T30

330 g

## T63 024240063
**€ 342,00**

3,8 kg

**952** 7-8-10-12-13-14-17-19 mm

## T83 024240083
**€ 321,00**

3,6 kg

**920A** 10-11-12-13-14-15-16-17-18 19-20-21-22-23-24-26-27-30-32 mm
**920/21** 125 mm **920/42** 305 mm
**920/22** 255 mm **920/55** 275 mm
**920/25**

## T91 024240091
**€ 224,50**

560 g

**900** 4-4,5-5-5,5-6-7-8-9-10-11-12-13-14 mm
**900ME** 2,5-3-4-5-6-8 mm
**900/20** 50 mm **900/21** 150 mm
**900/25 - 900BG/30 - 900/42 - 900/55**

## T92 024240092
**€ 254,00**

1,5 kg

**910A** 6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22 mm
**910/21** 125 mm **910/42** 210 mm
**910/22** 250 mm **910/55** 200 mm
**910/25**

## T124 024240124
**€ 104,00**

**1082GBM** 160 mm
**1150GBM** 180 mm
**1166GBM** 160 mm

640 g

## T137 024240137
**€ 116,50**




**1084BM** 160 mm
**1150BM** 180 mm
**1166BM** 160 mm

750 g

## T145 024240145
**€ 131,00**




**1032** 180 mm
**1034** 170 mm
**1036** 175 mm
**1038** 175 mm

640 g

## T153 024240153
**€ 71,50**

**1048N** 250 mm
**1052** 240 mm

1,1 kg

## T199 024240199
**€ 61,50**

490 g

**1260** 2,5x50 - 3x75 - 3,5x100 4x125 - 5,5x100 - 5,5x150 - 6,5x150 mm

## T202 024240202
**€ 56,50**

490 g

**1262** PH0x60 - PH0x100 - PH1x80 PH1x120 - PH2x100 - PH2x150 mm

## T205 024240205
**€ 80,50**

460 g

**1267TX** T6-T7-T8-T9-T10-T15-T20

## T211 024240211
**€ 43,50**

490 g

**1201E** 2,5x50-3x75-3,5x100 4x125-5,5x100-5,5x150-6,5x150 mm

## T213 024240213
**€ 47,50**

**1202E** PH0x60-PH1x80 PH1x120-PH2x100 PH2x150-PH3x150 mm

490 g

## T234 024240234
**€ 101,00**

**35** 100-200 mm
**1370** 300 g
**1390** ø 35 mm

1,3 kg

## T236 024240236
**€ 100,00**

**1719BMA/Q** 200 mm
**1719BMA/T** 200 mm
**1719BMA/P** 200 mm
**1719BMA/M** 200 mm
**1719BMA/R** 200 mm

870 g

## T239 024240239
**€ 132,50**

**31BM** ø 2-3-4-5-6-8 mm
**32** ø 4 mm

850 g

## C59A

### *"Endurance" workbench with 1 cab with 6 drawers*

- 6 drawers (588x367 mm) with ball bearing slides
- Worktop made from multiply wood with holes for vice item 1599F/125 - 1599GI/125 (to be ordered separately)
- Drawers protected by foamed rubber mats
- Hard-wearing nylon drawer front
- Roller cabs can accommodate thermoformed trays
- Front centralized safety lock
- Lower object shelf
- Can be fitted with paper roll holder (2400 RSC24/PC) and bottle holder (2400 RSC24/PF-), to be ordered separately

| n° | | Max |
|---|---|---|
| 4 | 70 mm | 25 kg |
| 1 | 140 mm | 30 kg |
| 1 | 280 mm | 35 kg |

931 mm
700 mm
2000 mm

| Ral 2011 | Ral 7016 | Ral 3000 |
|---|---|---|
| 059000011 | 059000031 | 059000051 |

**€ 1.960,00**

## C56

### *Workbench*

- Worktop made of painted sheet metal with external edge
- Steel frame with 6 supporting legs
- Two drawers with lock
- Can be fixed to floor

898 mm
640 mm
2000 mm

| Ral 2011 | Ral 7016 | Ral 3000 |
|---|---|---|
| 056000201 | 056000202 | 056000203 |

**€ 1.028,00**

## C56B

### *Workbench with wood top*

- Multi-ply wood worktop with holes for a vice (1599F/125 - 1599GI/125, to be ordered separately)
- Steel frame with 4 supporting legs
- Lower object shelf
- Can be fixed to floor

898 mm
720 mm
2000 mm

| Ral 2011 | Ral 7016 | Ral 3000 |
|---|---|---|
| 056000401 | 056000402 | 056000403 |

**€ 725,00**

## C56PL 0

056000021

**€ 377,00**

### *Folding workbench lightweight reliable*

- Lightweight, easy to carry.
- Worktop (800x500mm) made of galvanized sheet iron, for use on one side, protected by an anti-oil and anti-petrol rubber cover.
- Handle with rubber cover, for easy transportation.
- An additional sturdy, reliable worktop, always within reach

***EVEN LIGHTER! ONLY 18.5 kg***

860 mm
506 mm
910 mm

## 3068 030680000 NEW!

**€ 840,00**

### *Manual pallet truck with low forks*

Features:
- 2 steering wheels, 200x50 mm, made of PU
- Double front rollers, 80x70 mm, made of PU
- Pallet access entry and exit rollers
- Depth stop notch
- Lowering speed control valve
- Safety overload valve

Technical data:
- Maximum capacity: 2500 kg
- Overall length: 1200 mm
- Fork length: 800 mm
- Fork width: 540 mm
- Individual fork width: 160 mm
- Lever height: 1230 mm
- Max. lifting height: 115 mm

## 3069 030690000 NEW!

**€ 790,00**

### *Manual pallet truck*

Features:
- 2 steering wheels, 200x50 mm, made of PU
- Double front rollers, 80x70 mm, made of PU
- Pallet access entry and exit rollers
- Depth stop notch
- Lowering speed control valve
- Safety overload valve
- **3-position operating lever**

Technical data:
- Maximum capacity: 2500 kg
- Overall length: 1550 mm
- Fork length: 1150 mm
- Fork width: 540 mm
- Individual fork width: 160 mm
- Lever height: 1230 mm
- Max. lifting height: 115 mm
- Pallet storage corridor: 800x1200 lengthwise: 1805 mm
- Turning radius: 1347 mm

## C99P 099000101 € 219,00

### *Folding tool trolley, made of aluminium*

- Ultracompact folding tool trolley, made of anodized aluminium
- Telescopic handle
- Dimensions when open: 485x520x1095 mm
- Dimensions when closed: 485x80x810 mm
- Dimensions of folding base: 485x350 mm
- Two puncture proof wheels, Ø 175 mm
- Supplied with strap

## C48P 048000030 € 281,00

### *Folding tool trolley*

- Loading platform made of reinforced polypropylene (PP), with non-slip coating and TPV inserts for corner protection
- Retractable handle for quick, compact storage
- Four non-marking castors, Ø 125 mm: 2 fixed and 2 steering with brakes
- Maximum capacity: 300 kg.
- Loading platform working width: 705 mm
- Loading platform depth: 480 mm
- Loading platform height: 200 mm

## C48M

048000230

**€ 2.990,00**

### *Electric platform cart, with panels*

- Motorized platform, with 24V - 400W motor with 2x12V 33Ah battery supply and Curtis control card
- Loading floor made from sturdy steel, coated with non-slip rubber, with round tubular panels preventing objects from falling during transport
- The panels can be removed, to cater to individual transportation requirements
- Fitted with 2 pneumatic traction wheels (Ø 260 mm) and 2 swivelling rubber wheels (Ø 150mm), electromagnetic brake and differential gear
- Supplied with an external battery charger, 220V/50Hz - V/A 24/12e

**FUNCTIONAL SPECIFICATIONS**
- Carrying capacity: **400 kg**
- Driving speed: **4-6 km/h** (adjustable)
- Battery life: **4 hours**
- Maximum permitted slope with a full load: **6%**
- Maximum permitted slope with 100 kg load: **18%**

**SAFETY DEVICES:**
- Electronic brake
- Buzzer
- Anti-crushing guard
- Battery charge indicator
- Curtis control cart

**TECHNICAL SPECIFICATIONS**
- Overall dimensions: 1280x630x1100h mm
- Useful dimensions of loading platform with panels: 1180x580 mm
- Useful dimensions of loading platform without panels: 1260x620 mm
- Height of loading platform from floor: 320 mm
- Height of battery compartment from floor: 65 mm
- Weight with batteries: 140 kg

Beta BRUTUS

## C51

### *Trolley*

- 3 tops covered in antislip ribbed rubber
- Two fixing options for central worktop
- Four castors Ø 100 mm: 2 fixed and 2 steering (1 with brake)




| Ral 2011 | Ral 7016 | Ral 3000 |
|---|---|---|
| 051000001 | 051000002 | 051000003 |

**€ 313,00**

## C27S

### *Folding tool trolley for outdoor jobs*

- 2 drawers, 588x277 mm, with ball bearing slides, for two-way opening
- Large lower object compartment, 588x277x220 mm
- Sheet metal frame
- 2 fixed castors, Ø 160 mm, and 2 steering castors with brake, Ø 100 mm
- Thermoplastic worktop with 6 built-in tool trays
- Centralized lock
- Can accommodate drawer partitions and MC foam tool trays

- Folding tool trolley. Its unique patented design guarantees an effortless transport

| n° | | Max |
|---|---|---|
| 2 | 70 mm | 20 kg |

| Ral 2011 | Ral 7016 | Ral 3000 |
|---|---|---|
| 027000201 | 027000202 | 027000203 |

**€ 803,00**

## C41H

### *Two-module tool trolley*

- Sheet metal frame and plastic tops, synonymous with remarkable sturdiness and reduced weight
- 2 detachable modules:
  1 upper tool box,
  1 module with 2 drawers 95 mm in height,
  1 pull-out case made of plastic, 66 mm high,
  and 1 drawer 295 mm in height
- Oversized castors (160 mm), built into frame for easy transport - for example, on steps
- Side centralized lock for closing drawers of lower module
- Drawers with ball bearing slides and double closing hook
- Telescopic aluminium handle
- Small tool holder built into upper tool box
- Lower drawer with double ballbearing slide

920 mm × 335 mm × 536 mm

21 kg

041000002 041000021
041000024 041000006
041000012 041000008
041000010 041000005

**€ 622,00**

## C20L 021200002 € 92,50

***Five-section cantilever tool box, made from sheet metal,*** *empty*

5,4 kg

550x200x210 mm

## C19 021190001 € 60,00

***Three-section cantilever tool box, made from sheet metal,*** *empty*

3,4 kg

450x200x160 mm

## CP17 021170500 € 96,00

***Tool box, made of stainless steel and plastic, removable tote-tray,*** *empty*

2,5 kg

500x200x220 mm

## C22BL-0 022000170 € 368,00

***Tool trunk, made of sheet metal,*** *empty*

26 kg

1010x410x400 mm

## 2028/VV 020280010 € 246,50

***Tool case, made of polypropylene,*** *empty*

- 2 tool panels
- Interior bottom with removable partitions
- Double combination lock

4,9 kg

480x190x400 mm

## 2032/TV 020320110 € 477,00

***Tool trolley, made from plastic,*** *empty*

- 2 tool panels
- Tool pocket
- Interior bottom with removable partitions

450x200x400 mm

3,2 kg

## 2033L/VV 020330250

## € 386,00

***Tool case, made from aluminium,*** *empty*

- Highly shock resistant
- Nonscratch finish
- Ergonomic handle with rubber grip
- Double closure with combination
- 2 tool panels with elastic bands
- Interior bottom with removable partitions

470x203x373 mm

6,1 kg

## 2080/V12 020800000

## € 63,50

***Organizer tool case with 12 removable tote-trays***

Removable, folding clear tote-trays, for immediate recognition of contents

1,8 kg

300x330x145 mm

## C7AT 021070010 € 130,00

NEW!

***Servicing tool bag made from technical fabric,*** *empty*

- Made from super durable technical fabric
- Reinforced base with rubber feet
- Dual top handle for a safe, balanced hold
- Large front document pocket with zip closure and additional compartment with dual strap + clip closure
- dual side pocket with strap closure
- Capacious interior compartment with additional document pocket
- Supplied complete with adjustable padded shoulder strap

- **Front zipper opening on both bag sides** for quick access to tools:
  - 29 compartments and 13 elastic tool bands on front side
  - 33 tool compartments on rear side

2,4 kg

470x200x340 mm

- PC and tablet compartment with protective interior padding (PC size up to L=370 mm, H=250 mm)

## C9DA 021090005 € 105,00

NEW!

***Tool bag with large opening,*** *empty*

- Made from super durable technical fabric
- Hard plastic base, water-resistant
- Reinforced top handle for a safe hold
- Dual side pocket with strap closure
- Supplied complete with adjustable padded shoulder strap

- **Two side tool compartments with large openings,** for quick access to and perfect visibility of contents
  - 22 tool pockets and additional compartment with zip closure on front side
  - 14 tool pockets and additional zipped compartment on rear side

1,9 kg

420x220x310 mm

## C5 021050000 € 164,00

***Rucksack,*** *empty*

- Removable interior tool panel
- Six exterior pockets and two interior pockets
- Waterproof plastic base
- Double safety lace for fixing rucksack to shoulders
- Ergonomic padded back

2,5 kg

400x200x500 mm

## C5S 021050100 € 58,50

***Tool rucksack, made of hard-wearing polyester,*** *empty*

- Double handle on top centre of rucksack for firm, balanced hold
- Two large front pockets
- Two capacious interior pockets
- 2 Velcro tool straps
- Handy roll-up interior bag, composed of 4 tool panels
- Adjustable reinforced shoulder straps
- Maximum carrying capacity: 15 kg

TWO LARGE FRONT POCKETS

900 g

310x120x390 mm

## C6T 021060010 € 233,00

***Rucksack with castors,*** *empty*

- Telescopic handle for easy transport
- Built-in castors with practical dustproof cover for use as a rucksack
- Two removable tool panels
- Interior PC pocket and five exterior pockets
- Waterproof plastic base

4,5 kg

360x200x480 mm

***Technical fabric tool box,*** *empty*

- Hard frame
- Double bottom
- Tilting handle for easier access to tools
- Elastic tool bands and interior and exterior pockets
- Cover
- Tool tray included in double bottom
- Can be used with trolley C8

## C10S 021100001 € 131,00

420x220x250 mm

2,3 kg

## C10 021100000 € 166,50

520x220x250 mm

3,3 kg

## C9MT 021090200 € 93,00

NEW!

***Maintenance tool bag,** empty*

- Sturdy PVC cover, waterproof
- Reinforcement seams around the entire perimeter
- Double clip buckle closure
- Double interior handle for a safe, balanced hold
- Zipped document pocket

1,4 kg

450x180x200 mm

## 2109MT ID/1 021091026 NEW!

## € 658,00

***Maintenance tool bag C9MT with assortment of 24 plumbing tools***

24

| Quantity/Description | Beta N. |
|---|---|
| 1 Adjustable wrench 250 mm | 111E |
| 1 Mini pipe cutter for copper and light alloy pipes Ø 3÷28 mm | 332/2 |
| 1 Pipe cutter for copper and light alloy pipes Ø 3÷30 mm | 334 |
| 1 Ratchet-type shearsfor plastic pipes Ø 0÷42 mm | 342 |
| 1 Deburrer with fixed blade 140 mm | 345SB2 |
| 2 Pipe wrenches, Swedish pattern, 90° flat jaws 320-410 mm | 376 |
| 2 Slip joint pliers,slip-proof PVC coated handles 175-250 mm | 1048N |
| 1 Electrician's scissors, straight blades | 1128BMX |
| 1 Heavy duty combination pliers, bi-material handles, industrial finish ═ 180 mm | 1150GBM |
| 4 Screwdriver for slotted head screws ◐ 3x75-4x100-5,5x150-8x150 mm | 1201E |
| 2 Screwdriver for cross head Phillips® screws ✪ PH1x80-PH2x100 | 1202E |
| 1 Engineer's hammer 500 g | 1370 |
| 1 Folding ruler made of fibreglass 2 m | 1690F |
| 1 Measuring tape 5 m | 1692/5 |
| 1 Spirit level, made of aluminium 200 mm | 1696 |
| 1 ◗ Second-cut half-round files 200 mm | 1719BMA...M |
| 1 ▮ Flat rasp file, plastic handle 200 mm | 1719BM/RL |
| 1 Hacksaw frame, aluminium handle | 1725 |

## C11 021110000 € 97,00

***Technical fabric tool box,** empty*

- Hard water resistant plastic base
- Elastic tool bands and interior and exterior tool pockets
- Document holders built into double bottom of cover

2 kg

410x230x250 mm

## 2001/BZ27 VU 020010157

## € 286,00

***Folding tool case with assortment of 27 tools, for universal use***

380x290x60 mm

27

| Quantity/Description | Beta N. |
|---|---|
| 1 electrician's scissors, straight blades | 1128BMX |
| 1 half-round needle nose pliers ═ 180 mm | 1150 |
| 6 combination wrenches 7-8-10-13-17-19 mm | 42 |
| 3 screwdriver for slotted head screws ◐ 3x75-4x100-5,5x150 mm | 1201E |
| 3 screwdriver for cross head Phillips® screws ✪ PH0x60 - PH1x80 - PH2x100 mm | 1202E |
| 9 offset hexagon key wrenches ○ 1,5-2-2,5-3-4-5-6-8-10 mm | 96/SC9 |
| 1 engineer's hammer 300 g | 1370 |
| 1 Slip joint pliers boxed joints 250 mm | 1048N |
| 1 measuring tape 5 m | 1692/5 |
| 1 snap - off blade utility knife 18 mm | 1771 |

## 2005MPU/E 020050065

## € 96,50

***Tool pouch with assortment of 5 tools***

5

155x285x80 mm

| Quantity/Description | Beta N. |
|---|---|
| 1 electrician's scissors, straight blades | 1128BMX |
| 1 half-round needle nose pliers ═ 180 mm | 1150BM |
| 2 screwdriver for slotted head screws ◐ 3,5x100 - 4x100 mm | 1201E |
| 1 screwdriver for cross head Phillips® screws ✪ PH1x80 mm | 1202E |

# A STYLISH, SLIM SHAPE ENHANCED BY A SLENDER PROFILE, LIGHTER TO THE TOUCH.

42

***The strength, resilience and ergonomic design of the Beta wrench reach even higher values, to provide users with the best possible tool. The manufacturing process is carried out in our factories in Sovico and Sulmona, on the basis of state-of-the-art automation technology and the best trained workers.***

### *ERGONOMIC*

The offset ring has a 15 degree angle to protect the hand. The shape is obtained from a die; it is not bent later.

### *POWERFUL*

Torque values more than doubled compared to the requirements to be satisfied under ISO 1711.

### *STRENGTH*

Remarkable strength: in case of improper use, the wrench buckles, without breaking suddenly and dangerously.

## 42/SP15 — 000421078 — € 185,50

***Set of 15 combination wrenches***

- with holder

6-7-8-9-10-11-12-13-14-15-16-17-19-22-24 mm

## 42/SC9I — 000421087 — € 109,00

***Set of 9 combination wrenches with compact support***

- Compact, practical, easy-to-carry support
- Quickly identified wrench size
- Wrench safely locked in support

8-10-11-12-13-14-15-17-19 mm

## 42/S26 — 000421070 — € 445,00

***Set of 26 combination wrenches***

6-7-8-9-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-25-26-27-28-29-30-32 mm

## 55/B12N — 000550164 — € 152,50

***Set of 12 double open end wrenches***
*in roll-up wallet made of durable polyester*

6x7-8x9-10x11-12x13
14x15-16x17-18x19
20x22-21x23-24x26
25x28-30x32 mm

## 142SN/SC9 001420259

**€ 266,00**

***Set of 9 swivel end ratcheting combination wrenches,*** *with compact support*

8-10-11-12-13-14-15-17-19 mm

## 142/SC9I 001420087

**€ 222,00**

***Set of 9 reversible ratcheting combination wrenches,*** *with compact support*

8-10-11-12-13-14-15-17-19 mm

## 141/B9 001410069 € 195,50

***Set of 9 ratcheting combination wrenches, straight series,*** *in cloth wallet*

8-10-11-12-13-14-15-17-19 mm

## 192/S2 001920070 € 67,00

***Set of 2 reversible ratcheting offset bi-hex ring wrenches***

***8 SIZES IN 2 WRENCHES***

## 186 8-32 001860008 € 50,50

***Self-locking wrench with automatic take-up device for hexagons, 8 to 32 mm***

Ideal for hexagon, Spline, square and Torx® head screws, including damaged screws









***L 260 mm***

# THE ADJUSTABLE WRENCHES WITH SCALES

# 111E

***Beta 111E allow differently sized nuts and bolts to be tightened and loosened through the sliding jaws, which can be adjusted through the central rolls.***

**Head angled at 15°,** allowing hardly accessible spaces to be reached, as is the case with our iconic combination wrenches, "42"

Made from high-performance alloy steel for **increased mechanical torsional strength**

Special heat treatment for excellent **wear resistance**

**Double laser marking** in mm/inches

**Compact head** with completely open jaw

Based on the new ergonomic properties, weight has been **reduced by 20%**

**Hole on handle** for hanging wrench

## 111E

*Adjustable wrenches with scales, **chrome-plated***
*• right-hand rotation of pin*

| | L mm | L " | A max mm | | € |
|---|---|---|---|---|---|
| 111E 100 | 100 | 4 | 15 | 001110110 | € 26,00 |
| 111E 150 | 150 | 6 | 24 | 001110115 | € 27,00 |
| 111E 200 | 200 | 8 | 29 | 001110120 | € 33,00 |
| 111E 250 | 250 | 10 | 34 | 001110125 | € 40,00 |
| 111E 300 | 300 | 12 | 40 | 001110130 | € 53,00 |
| 111E 380 | 380 | 15 | 45 | 001110138 | € 104,00 |
| 111E 450 | 450 | 18 | 54 | 001110145 | € 173,00 |
| 111E 600 | 600 | 24 | 62 | 001110160 | € 239,50 |

## 111EN

*Adjustable wrenches with scales, **phosphated***
*• left-hand rotation of pin*

| | L mm | L " | A max mm | | € |
|---|---|---|---|---|---|
| 111EN 100 | 100 | 4 | 15 | 001110410 | € 23,80 |
| 111EN 150 | 150 | 6 | 24 | 001110415 | € 24,90 |
| 111EN 200 | 200 | 8 | 29 | 001110420 | € 29,00 |
| 111EN 250 | 250 | 10 | 34 | 001110425 | € 36,00 |
| 111EN 300 | 300 | 12 | 40 | 001110430 | € 48,50 |
| 111EN 380 | 380 | 15 | 45 | 001110438 | € 96,00 |
| 111EN 450 | 450 | 18 | 54 | 001110445 | € 163,50 |

## 111ER

*Reversible jaw adjustable wrenches with scales, **chrome-plated***
*• right-hand rotation of pin*

| | L mm | L " | A max mm | Ø max mm | | € |
|---|---|---|---|---|---|---|
| 111ER 200 | 200 | 6 | 29 | 3/4 | 001110520 | € 34,50 |
| 111ER 250 | 250 | 8 | 34 | 1 | 001110525 | € 42,50 |
| 111ER 300 | 300 | 10 | 40 | 1.1/4 | 001110530 | € 55,50 |

## 111CM

*Wide opening adjustable wrenches, **chrome-plated**, short series*
*• right-hand rotation of pin*

| | L mm | L " | A max mm | | € |
|---|---|---|---|---|---|
| 111CM 170 | 170 | 6 | 32 | 001110770 | € 39,50 |
| 111CM 220 | 220 | 8 | 38 | 001110722 | € 48,00 |
| 111CM 270 | 270 | 10 | 46 | 001110727 | € 63,50 |

## 96/SC9 000960374

**€ 21,80**

***Set of 9 offset hexagon key wrenches***

| O mm | L mm |
|---|---|
| 1,5 | 45 |
| 2 | 50 |
| 2,5 | 57 |
| 3 | 64 |
| 4 | 72 |
| 5 | 83 |
| 6 | 94 |
| 8 | 105 |
| 10 | 119 |

***COMPACT***

## 96BPC/SC9 000960354

**€ 45,50**

***Set of 9 ball head offset hexagon key wrenches***

| O mm | L mm |
|---|---|
| 1,5 | 79 |
| 2 | 84 |
| 2,5 | 89 |
| 3 | 99 |
| 4 | 108 |
| 5 | 126 |
| 6 | 148 |
| 8 | 168 |
| 10 | 187 |



## 97BTX/SC8 000970164

**€ 81,50**

***Set of 8 ball head offset key wrenches, long model, for Torx® head screws***

| ✪ mm | L mm |
|---|---|
| T9 | 62 |
| T10 | 71 |
| T15 | 81 |
| T20 | 92 |
| T25 | 94 |
| T27 | 105 |
| T30 | 114 |
| T40 | 129 |



## 96LBP/SC9 000961354

**€ 53,00**

***Set of 9 ball head offset hexagon key wrenches***

| O mm | L mm |
|---|---|
| 1,5 | 90 |
| 2 | 100 |
| 2,5 | 112 |
| 3 | 127 |
| 4 | 144 |
| 5 | 163 |
| 6 | 184 |
| 8 | 204 |
| 10 | 230 |



***EXTRA LONG VERSION +30%***

## 97BTXL/SC8 000970364

**€ 94,00**

***Set of 8 ball head offset key wrenches, long model, for Torx® head screws***

| ✪ mm | L mm |
|---|---|
| T9 | 80 |
| T10 | 86 |
| T15 | 100 |
| T20 | 110 |
| T25 | 126 |
| T27 | 140 |
| T30 | 160 |
| T40 | 176 |



***EXTRA LONG VERSION +25%***

## 97BRTXL/SC8 000970464

**€ 95,00**

***Set of 8 ball head offset key wrenches, long model, for Tamper Resistant Torx® head screws***

| ✪ mm | L mm |
|---|---|
| T9 | 80 |
| T10 | 86 |
| T15 | 100 |
| T20 | 110 |
| T25 | 126 |
| T27 | 140 |
| T30 | 160 |
| T40 | 176 |



**NEW!**

***EXTRA LONG VERSION +25%***

## 96T/S5P 000960946

**€ 65,50**

***Set of 5 offset hexagon key wrenches*** *with handles*

O 2,5-3-4-5-6 mm

## 97TTX/S6 000970791

**€ 93,50**

***Set of 6 ball head offset key wrenches for Torx® head screws*** *with handles*

✪ T10-T15-T20-T25-T30-T40

## 951GP/S6 009511687 € 164,50

NEW!

***Set of 6 T-handle wrenches with one hexagon male end***

O 3-4-5-6-8-10 mm

**Beta's wrench 951GP is the name for quick, accurate screw fit.**
Designed to satisfy some key requirements in the Racing world: developing high torque values and ensuring quick tightening.

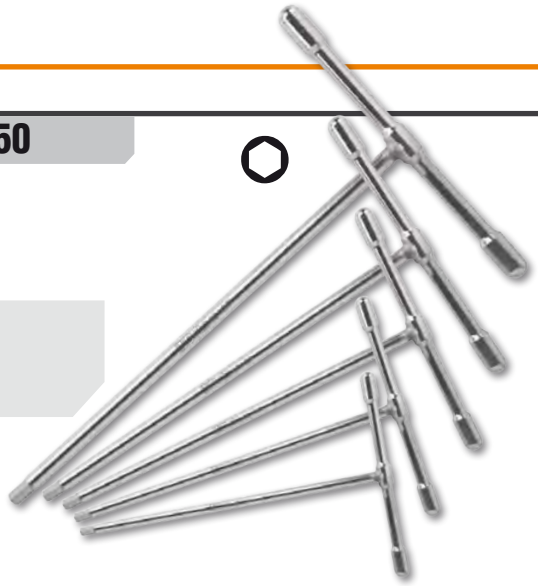

## 951/S6 009510687 € 132,50

***Set of 6 T-handle wrenches with three hexagon male ends***

O 2,5-3-4-5-6-8 mm

## 952/D7 009520079 € 256,00

***Set of 7 T-handle wrenches with swivelling hexagon sockets***

◎ 7-8-10-12-13-14-17 mm

## 96BP-CL/SC9 000961619

## € 55,50

***Set of 9 ball head offset key wrenches, coloured***

| O mm | L mm |
|---|---|
| 1,5 | 91 |
| 2 | 102 |
| 2,5 | 113 |
| 3 | 128 |
| 4 | 143 |
| 5 | 163 |
| 6 | 185 |
| 8 | 206 |
| 10 | 231 |



***EXTRA LONG VERSION +30%***

## 97BTX-C/SC8 000971658

## € 90,00

***Set of 8 coloured ball head offset key wrenches, for Torx® head screws***

| ✪ mm | L mm |
|---|---|
| T9 | 80 |
| T10 | 86 |
| T15 | 90 |
| T20 | 95 |
| T25 | 100 |
| T27 | 105 |
| T30 | 114 |
| T40 | 124 |



## 142MC/SC9I 001422087

## € 232,50

***Set of 9 reversible ratcheting combination wrenches, coloured,*** *with compact support*

| mm | L mm |
|---|---|
| 8x8 | 136 |
| 10x10 | 159 |
| 11x11 | 168 |
| 12x12 | 174 |
| 13x13 | 180 |
| 14x14 | 190 |
| 15x15 | 200 |
| 17x17 | 233 |
| 19x19 | 248 |

# COLOR CODE

## 900MC/C24 009002960

1/4"

**€ 382,00**

***Assortment of 11 hexagon sockets, 13 coloured socket drivers and 6 accessories,*** *in metal case*

1 kg

270x120x45 mm

| | | |
|---|---|---|
| 900MC | 4-5-6-7-8-9-10-11-12-13-14 mm |
| 900MC/PH | PH1 - PH2 - PH3 |
| 900MC/TX | T10-T15-T20-T25-T27-T30- T40 |
| 900MC/LP | 0,8x4 - 1,2x6,5 - 1,2x8 mm |
| 900/20 | 50 mm |
| 900/21 | 150 mm |
| 900/25 | |
| 900BG/30 | |
| 900/42 | |
| 900/55 | |

## 920MC/C14 009202964

1/2"

**€ 302,00**

***Assortment of 14 coloured hexagon hand sockets and 5 accessories,*** *in metal case*

4,2 kg

420x185x60 mm

| | | |
|---|---|---|
| 920MC | 8-10-11-12-13-14-15-16-17-18-19 21-22 -24 mm |
| 920/21 | 125 mm |
| 920/22 | 255 mm |
| 920/25 | |
| 920/42 | |
| 920/55 | |

## 860/C27 008600880

**€ 93,50**

1/4

***Set of 25 bits, 1 connector and 1 reversible ratchet*** *in plastic case*

- **860LP** 0,5x3-1,0x5,5-1,2x6,5 mm
- **860PE** 2-2,5-3-4-5-6-mm
- **860PH** PH1-PH2(x2)-PH3
- **860TX** T6-T8-T10-T15-T20-T25-T30-T40
- **860PZ** PZ1 - PZ2(2x) - PZ3
- **860/55** 100 mm
- **892/0**

## 860MIX/A31 008600902

1/4

**€ 92,00**

***Set of 30 bits with magnetic bit holder*** *in plastic case*

- **860LP** 0,5x3 - 0,6x4,5 - 0,8x5,5 1,0x5,5 - 1,2x6,5 mm
- **860PE** 2-2,5-3-4-5-6-8-10 mm
- **860PH** PH0 - PH1 - PH2 - PH3 - PH4
- **860RTX** T9-T10-T15-T20-T25-T27-T30-T40
- **860PZ** PZ1 - PZ2 - PZ3 - PZ4
- **882MSR/50** ⬡ 1/4 ⬢ 1/4

## 1257LPH/S8 012570210

**€ 70,50**

***Set of 8 micro-screwdrivers for slotted head screws and Phillips® screw*** *in hard case*

1257PH PH00-PH0-PH1
1257LP 0,4x2-0,4x2,5-0,5x3 0,6x3,5-0,8x4 mm

180x120x50 mm

## 1263MC/D8 012632008

**€ 66,50**

***Set of 8 coloured screwdrivers***

1260 2,5x50-3x75-4x100- 5,5x125 6,5x150 mm
1262 PH0x60-PH1x80 PH2x100 mm

# THE FUNCTIONAL, ERGONOMIC BETA EVOX SCREWDRIVER IS ALSO ELECTRICAL NOW!

Beta EVOX-E

***Life: you can tighten up in up to 1,000 screws with one charging cycle***

**Flawless grip:** it fits your hand and allows a firm, comfortable hold, during both electrical and manual operation, resulting in reduced hand and wrist fatigue.

**Convenience:** the reduced dimensions and front LEDs make it perfect for use in small, poorly lit spaces.

***BITS INCLUDED:***

**Versatility:** this item caters to all needs; it is supplied with a belt case, complete with 6 50-mm bits with mixed heads. In addition, it can be used with all bits with ¼" hexagon drives.

## 1210E/GE 012100701 € 176,00

***Evox-E electric screwdriver***

## 1211E/GE 012110701 € 187,50

***Evox-E electric screwdriver***

1000 V



**Technical data:**
- 3.7V 2300mAh lithium battery
- Maximum torque in electric mode: 1.2 Nm
- **Over 1,000 screw fastenings at 1.2 Nm per charging cycle**
- **Speed: 250 rpm**
- **Outstanding static resistance (up to 12 Nm, manual tightening)**
- Outstanding mechanical resistance
- 1/4" magnetic bit holder
- Compatible with all standardized bits
- Rechargeable via USB-C cable (included)
- USB-C port protected with screw cap
- Front ring LEDs for improved visibility of working area
- When charging, steady LEDs indicate that charging is complete
- Ergonomic nylon handle inspired by Evox screwdriver
- Built-in and sealed operation buttons
- Convenient belt pouch with bit pockets (6 mixed bits included)

## 1203E/D8P 012031018

**€ 44,50**

***Set of 8 screwdrivers***

1201E ◐ 2,5x50-3x75-4x100-5,5x100
6,5x150 mm
1202E ✪ PH0x60-PH1x80-PH2x100 mm

## 1203E/D10N 012031019

**€ 56,50**

***Set of 10 screwdrivers***

1201E ◐ 2,5x50-3x75-4x100-5,5x150-6,5x150 mm
1202E ✪ PH0x60-PH1x80-PH2x100 mm
1201E/N ◐ 4x30 mm
1202E/N ✪ PH1x30 mm

## 1207E/TX-D7 012071207

**€ 57,50**

***Set of 7 screwdrivers***

1207E/TX ✪ T6-T8-T10-T15
T20-T25-T30

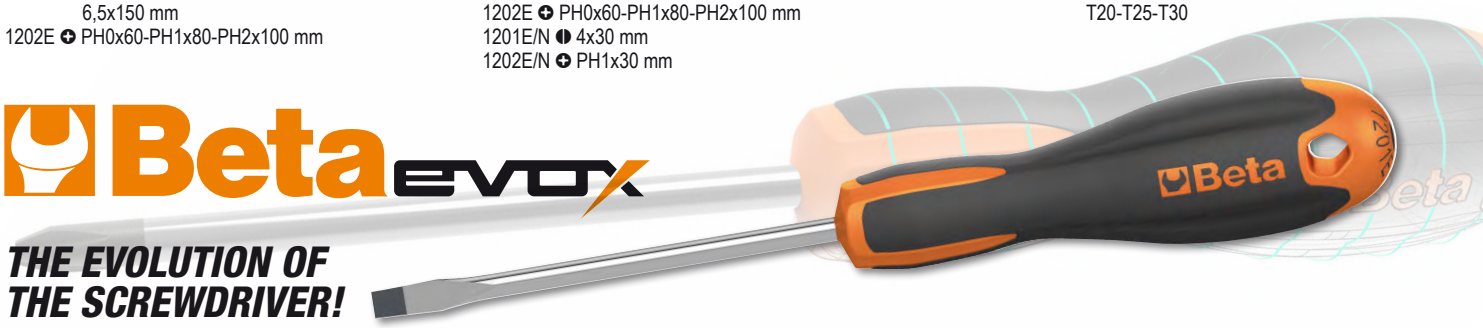


## 1263/D8 012630008

**€ 62,50**

***Set of 8 screwdrivers***

1260 ◐ 2,5x50-3x75-4x100- 5,5x125
6,5x150 mm
1262 ✪ PH0x60-PH1x80-PH2x100 mm

## 1263/D10 012630010

**€ 80,00**

***Set of 10 screwdrivers***

1260 ◐ 3x75-3,5x100-4x125-5,5x150-6,5x150 mm
1262 ✪ PH0x60- PH1x8-PH2x100 mm
1260N ◐ 4x30 mm
1262N ✪ PH1x30 mm

## 1267TX/D7 012670307

**€ 78,50**

***Set of 7 screwdrivers***

1267TX ✪ T6-T8-T10-T15-T20-T25-T30

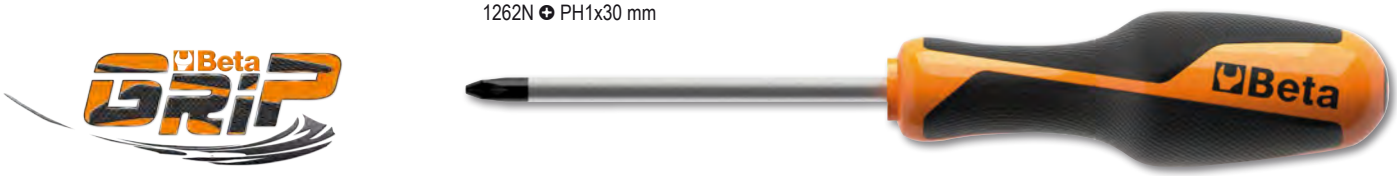


## 1293/D6 012930401

**€ 63,00**

***Set of 6 screwdrivers***

1290 ◐ 3,5x75-5,5x150-6,5x150 mm
1292 ✪ PH0x60-PH1x80-PH2x100 mm

## 1293INOX/D8 012930408

**€ 89,50**

***Set of 8 screwdrivers made of stainless steel***

1290INOX ◐ 2,5x50-3x75-4x100
5,5x150-6,5x150 mm
1292INOX ✪ PH0x60-PH1x80-PH2x100 mm

## 1243/D7 012430017

**€ 106,00**

***Set of 7 screwdrivers with steel heads***

1241 ◐ 5,5x100-6,5x125
1,2x8x150-1,6x10x200 mm
1242 ✪ PH1x100-PH2x100
PH3x150 mm

## 867/C52 — 008670901 — € 143,00

10mm

***52 hexagon bits, 10 mm and 2 accessories***

| | | | |
|---|---|---|---|
| | 867PE | ○ | 4-5-6-7-8-10-12 mm |
| | 867PE/L | ○ | 4-5-6-7-8-10-12 mm |
| | 867XZN | ○ | M5-M6-M8-M10-M12 |
| | 867XZN/L | ○ | M5-M6-M8-M10-M12 |
| | 867TX | ✪ | T20-T25-T30-T40-T45-T50-T55 |
| | 867TX/L | ✪ | T20-T25-T30-T40-T45-T50-T55 |
| | 867RTX | ✪ | T20-T25-T30-T40-T45-T50-T55 |
| | 867RTX/L | ✪ | T20-T25-T30-T40-T45-T50-T55 |
| | 867/1 | | ⬡ 10 mm - □ 3/8” |
| | 867/2 | | ⬡ 10 mm - □ 1/2” |

2,1 kg

250x170x70 mm

## 862F/A7 — 008620950 — € 53,50

1/4

***Set of 7 magnetic bits, hexagon sockets,*** *in plastic case*

862F ◎ 5,5-6-7-8-10-12-13 mm

## 1600Q 8 — 016000008 — € 31,00

1/4

***Four-way wrench for control panel operators***

**Wrench for maintenance in numerous sectors, including electrical industry, plumbing, ventilation and gas.**

5 mm | □ 6 mm △ 7 mm | 7-8 mm | 9 mm | 1/4” | 3-5 mm | 1,0x7 mm | PH2

## 1600Q 10 — 016000010 — € 39,50

1/4

***Eight-way wrench, with articulated joint, for control panel operators***

- Eight-way wrench, can be rotated to easily select the head to use
- Magnetic articulated joint for increased force
- 1/4” male drive for use of sockets

**Wrench for maintenance in numerous sectors, including electrical industry, plumbing, ventilation and gas.**

5 mm | 6-7 mm | 8-9 mm | 5-6-7 mm | 8-9 mm | 10 mm | 1/4” | 3-5 mm | 1/4” mm

## 1256/C36-2 — 012560100 — € 72,50

***Bi-material microscrewdriver with 36 interchangeable 4-mm bits and magnetic extension***

| | | | |
|---|---|---|---|
| | 1256TX | ✪ | T3-T4-T5-T6-T7-T8-T9-T10-T15 |
| | 1256RTX | ✪ | T6-T7-T8-T9-T10 |
| | 1256LP | ◐ | 0,8-1,2-1,5-1,8-2-2,5-3-3,5-4 mm |
| | 1256PE | ○ | 0,7-0,9-1,3-1,5-2 mm |
| | 1256PH | ⊕ | PH000-PH00-PH0-PH1 |
| | 1256PZ | ⊕ | PZ000-PZ00-PZ0-PZ1 |
| | 1256/20 | | |
| | 1256/30 | | |

130x60x35 mm

200 g

## *Reversible ratchet*



| | L mm | Ø mm | A mm | ■ | teeth | | € |
|---|---|---|---|---|---|---|---|
| **900/55** | 125 | 25 | 29 | 1/4” | 48 | 009000870 | **€ 47,00** |
| **910/55** | 200 | 30 | 33 | 3/8” | 72 | 009100882 | **€ 51,00** |
| **920/55** | 275 | 40 | 43 | 1/2” | 72 | 009200882 | **€ 62,00** |

## "BETA MINI" TOOL CASE IS COMPACT AND EASY TO CARRY

***FUNCTIONAL, BITS ARE EASY TO TAKE OUT AND PUT IN***

## 900/C39N 009000947

**€ 211,50** 1/4" 1/4

***Assortment of 11 hexagon sockets, 21 bits and 7 accessories,***
*in plastic case*

150x97x53 mm

| | | | | |
|---|---|---|---|---|
| | 900 | | 5-5,5-6-7-8-9-10-11-12-13-14 mm | 11 |
| | 900/20 | 1/4" | 50 mm | 1 |
| | 900/20L | 1/4" | 100 mm | 1 |
| | 900/25 | 1/4" | | 1 |
| | 900BG/30C | 1/4" | 128 mm | 1 |
| | 892/0 | | ■ ¼ - ⬢ ¼ | 1 |
| | 895/1 | | ⬡ ¼ - □ ¼ | 1 |
| | 861LP | | 0,6x4,5-1,2x6,5-1,2x8 mm | 3 |
| | 861PH | | PH1-PH2-PH3 | 3 |
| | 861PZ | | PZ1-PZ2-PZ3 | 3 |
| | 861PE | | 2,5-3-4-5-6 mm | 5 |
| | 861RTX | | T10-T15-T20-T25-T27-T30-T40 | 7 |
| | 900/55Z | | 126 mm | 1 |

## 900/C39U 009001947

**€ 213,50** 1/4" 1/4

***Assortment of 11 gear lock sockets, 21 bits and 7 accessories,***
*in plastic case*

150x97x53 mm




| | | | | |
|---|---|---|---|---|
| | 900U | mm | 5-5,5-6-7-8-9-10-11-12-13-14 mm | 11 |
| | | " | 13/64-7/32-1/4-9/32-5/16-11/32-3/8-7/16-15/32-1/2-9/16 | |
| | | XZN | M6-M8-M10-M12-M14-M16-M18 | |
| | | TX | E7-E8-E10-E12-E14-E16-E18 | |
| | 900/20 | 1/4" | 50 mm | 1 |
| | 900/20L | 1/4" | 100 mm | 1 |
| | 900/25 | 1/4" | | 1 |
| | 900BG/30C | 1/4" | 128 mm | 1 |
| | 892/0 | | ■ ¼ - ⬢ ¼ | 1 |
| | 895/1 | | ⬡ ¼ - □ ¼ | 1 |
| | 861LP | | 0,6x4,5-1,2x6,5-1,2x8 mm | 3 |
| | 861PH | | PH1-PH2-PH3 | 3 |
| | 861PZ | | PZ1-PZ2-PZ3 | 3 |
| | 861PE | | 2,5-3-4-5-6 mm | 5 |
| | 861RTX | | T10-T15-T20-T25-T27-T30-T40 | 7 |
| | 900/55Z | | 126 mm | 1 |

## 900/C11 009000971

**€ 230,00** 1/4" 1/4

***11 hexagon sockets, 20 bits and 8 accessories,***
*in metal case*

1,2 kg

270x120x45 mm

| | | | |
|---|---|---|---|
| | 861LP | | 0,5x3-0,8x5,5-1x5,5-1,2x6,5 mm |
| | 861PE | | 3-4-5-6-8 mm |
| | 861PH | | PH0-PH1-PH2-PH3 |
| | 861TX | | T8-T10-T15-T20-T25-T30-T40 |
| | 895/1 | | ⬡1/4" - □1/4" |
| | 900 | | 5-5,5-6-7-8-9-10-11-12-13-14 mm |
| | 900/16 | | □1/4 - ■1/4" |
| | 900/20 | | 50 mm |
| | 900/21 | | 150 mm |
| | 900/25 | | |
| | 900/42 | | |
| | 900BG/30 | | |
| | 900/55 | | |

## 902A/C22 009020807 € 366,00

***Assortment of 22 hexagon sockets and 6 accessories,*** *in metal case*

| | | | | |
|---|---|---|---|---|
| 1/4" | | 900 | ◎ | 5-5,5-6-7-8-9-10-11-12-13 mm |
| | | 900/20 | | 50 mm |
| | | 900/25 | | |
| | | 900/55 | | |
| 1/2" | | 920A | ◎ | 10-13-14-15-17-18-19-22-24 27-30-32 mm |
| | | 920/21 | | 125 mm |
| | | 920/25 | | |
| | | 920/55 | | |

420x185x60 mm

***Assortment of 16 hexagon sockets and 5 accessories in foam tray,*** *in metal case*

| | | | |
|---|---|---|---|
| | 910A | ◎ | 6-7-8-9-10-11-12-13-14-15-16-17-18-19-21-22 mm |
| | 910/21 | | 125 mm |
| | 910/22 | | 250 mm |
| | 910/25 | | |
| | 910/42 | | 210 mm |

335x145x60 mm

## 910A/C16 009100936

**€ 266,00**

**Reversible ratchet (910/55)**

## 910A/C16HR 009100935

**€ 293,00**

**Reversible ratchet with rotating handle (910/58)**

***Assortment of 17 hexagon sockets and 5 accessories in foam tray,*** *in metal case*

| | | | |
|---|---|---|---|
| | 920A | ◎ | 10-11-12-13-14-15-16-17-18-19 20-21-22-24-27-30-32 mm |
| | 920/21 | | 125 mm |
| | 920/22 | | 255 mm |
| | 920/25 | | |
| | 920/42 | | 305 mm |

420x185x60 mm

## 920A/C17M 009200924

**€ 326,00**

**Reversible ratchet (920/55)**

## 920A/C17MR 009200937

**€ 357,00**

**Reversible ratchet with rotating handle (920/58)**

## 928A/C12 009280955 € 867,00

***Assortment of 12 hexagon hand sockets and 5 accessories,*** *in metal case*

| | | | |
|---|---|---|---|
| | 928A | ◎ | 22-24-27-30-32-34-36-38-41 46-50-55 mm |
| | 928/21 | | 200 mm |
| | 928/22 | | 380 mm |
| | 928/25 | | |
| | 928/42 | | 450 mm |
| | 928/55 | | |

530x220x80 mm

# THE TORQUE WRENCH THAT DOES NOT REQUIRE RELEASING TENSION

NEW!

***Even if tension is not released, the number of cycles, durability and tightening accuracy as required by reference standards are guaranteed.***
**In order to confirm these parameters, Beta Utensili's Research & Development Department performed numerous durability tests at the in-house laboratories as at hundreds of end users.**
**This result has been obtained through:**
- **the use of the best-performing currently available materials;**
- **special heat treatments on interior parts.**

## ZERO-RESET

### 100% MADE IN ITALY

***The Zero-Reset torque wrench was entirely designed and developed in-house and is manufactured at Beta Utensili's factories in Italy, using 100% Italian-made parts.***

**ZERO-RESET TECHNOLOGY:** Based on higher-performance materials and improved heat treatment of both the spring and the component parts of the adjustment system, the wrench no longer requires releasing tension after use.
**EASY SETTINGS:** The graduated scale allows minimum interval fractions to be set up (in tenths of Nm/lbf.ft).
**IMPROVED VISIBILITY:** Double graduation for clearer, simpler torque visibility.

## 666

1/4" 3/8" 1/2"

UNI EN ISO 6789

***ZERO-RESET click-type torque wrenches with reversible ratchets, for right-hand tightening, torque accuracy: ± 3%***

| | Nm | lbf.ft | ■ | | L (mm) | g | | € |
|---|---|---|---|---|---|---|---|---|
| **666/2** | 5÷25 | | 1/4" | 0,05 | 273 | 395 | 006660702 | **€ 275,00** |
| **666/2X** | 5÷25 | | 3/8" | 0,05 | 273 | 405 | 006660703 | **€ 275,00** |
| **666/5** | 10÷50 | | 3/8" | 0,25 | 342 | 680 | 006660705 | **€ 250,00** |
| **666/10** | 20÷100 | | 3/8" | 0,25 | 385 | 760 | 006660710 | **€ 252,00** |
| **666/10X** | 20÷100 | | 1/2" | 0,25 | 385 | 770 | 006660711 | **€ 257,00** |
| **666/20** | 40÷200 | | 1/2" | 0,5 | 471 | 1020 | 006660720 | **€ 274,00** |
| **666/30** | 60÷300 | | 1/2" | 1 | 600 | 1271 | 006660730 | **€ 311,00** |
| **666-LBF.FT/2** | | 4÷18 | 1/4" | 0,05 | 273 | 395 | 006660762 | **€ 260,00** |
| **666-LBF.FT/2X** | | 4÷18 | 3/8" | 0,05 | 273 | 405 | 006660763 | **€ 260,00** |
| **666-LBF.FT/5** | | 7÷37 | 3/8" | 0,25 | 342 | 680 | 006660765 | **€ 236,00** |
| **666-LBF.FT/10** | | 15÷75 | 3/8" | 0,25 | 385 | 760 | 006660780 | **€ 238,00** |
| **666-LBF.FT/10X** | | 15÷75 | 1/2" | 0,25 | 385 | 770 | 006660781 | **€ 243,00** |
| **666-LBF.FT/20** | | 30÷150 | 1/2" | 0,5 | 471 | 1020 | 006660782 | **€ 259,00** |
| **666-LBF.FT/30** | | 50÷230 | 1/2" | 1 | 600 | 1271 | 006660783 | **€ 294,00** |

## 667

1/2" 3/4"

UNI EN ISO 6789

***ZERO-RESET click-type torque wrenches with push-through ratchets,for right-/left-hand tightening, torque accuracy: ± 3%***

| | Nm | ■ | | L (mm) | g | | € |
|---|---|---|---|---|---|---|---|
| **667/20** | 40÷200 | 1/2" | 0,5 | 471 | 1035 | 006670720 | **€ 269,00** |
| **667/30** | 60÷300 | 1/2" | 1,0 | 600 | 1285 | 006670730 | **€ 300,00** |
| **667/40** | 80÷400 | 3/4" | 1,0 | 710 | 2220 | 006670740 | **€ 721,00** |

## 605DGT/2 006050302 € 270,00

NEW!

***Electronic torque wrench with reversible ratchet for right-/left-hand tightening torque accuracy ± 3% (right-hand) ± 4% (left-hand)***

- Dual measurement mode: peak hold and track
- Light indicators and an intermittent sound inform user that preset torque has been reached
- Power supply: 1 1.5V AAA battery (included)

1/4”

| Nm | kgcm | lbf.ft | ■ | L (mm) | |
|---|---|---|---|---|---|
| 4÷20 | 10÷204 | 0,75÷14,75 | 1/4” | 210 | 0,01 |

## 605E

1/4”

UNI EN 26789 ISO 6789

***Click-type torque wrenches with reversible ratchets for right-hand and left-hand tightening torque accuracy: ± 6%***

| | Nm | kgfm | lbf.ft | ■ | L (mm) | | g | | € |
|---|---|---|---|---|---|---|---|---|---|
| 605E/5 | 1÷5 | 0,1÷0,5 | 10÷45 | 1/4” | 190 | 0,05 | 180 | 006050105 | € 225,50 |
| 605E/10 | 2÷10 | 0,2÷1,0 | 18÷90 | 1/4” | 190 | 0,1 | 180 | 006050110 | € 235,50 |

## 610L

1/2”

***Click-type torque wrenches with L-shaped levers, for right-hand tightening, with 5 preset values, torque accuracy: ± 4%***

UNI EN ISO 6789

| L mm | L1 mm |
|---|---|
| 470 | 80 |

**610L/5** 006100125

**€ 167,00**

**Selectable torque values:**
**90 - 100 - 110 - 120 - 130 Nm**

**610L/5L** 006100150

**€ 172,00**

**Selectable torque values:**
**120 - 140 - 160 - 180 - 200 Nm**

## 677/C

3/4”

***677/C800*** UNI EN 26789 ISO 6789

***Break-back torque wrenches with push-through ratchets, for right-hand and left-hand tightening, torque accuracy: ±4%*** *in case*

The break-back torque wrench, Beta 677, is particularly suitable for heavy-duty use at high torques. The break-back mechanism informs the user that the set torque has been reached through the bending of the wrench at the joint by approximately 20°.

- Wrench composed of two parts: lever with ratchet and break-back system with torque adjustment

| | Nm | kgfm | lbf.ft | ■ | L (mm) | | kg | | € |
|---|---|---|---|---|---|---|---|---|---|
| 677/C600 | 120÷600 | 12÷60 | 100÷450 | 3/4” | 1059 | 10 | 6,0 | 006770607 | € 1.101,00 |
| 677/C800 | 200÷800 | 20÷80 | 150÷600 | 3/4” | 1319 | 10 | 6,7 | 006770612 | € 1.144,00 |
| 677/C1000 | 300÷1000 | 30÷100 | 200÷750 | 3/4” | 1554 | 20 | 7,4 | 006770616 | € 1.215,00 |

## *THE DECENTRALIZED PIN ALLOWS THE FULCRUM TO BE CLOSER TO THE CUTTING POINT, THEREBY RESULTING IN AN IMPROVED LEVER EFFECT*

### 1169BM/D3 011690133

**€ 103,00**

***Set of 1 combination pliers, 1 long needle nose pliers and 1 diagonal cutting nippers***

### 1169GBM/D3 011690273

**€ 92,00**

***Set of 1 combination pliers, 1 long needle nose pliers and 1 diagonal cutting nippers, bi-material handles, industrial finishing***

INDUSTRIAL FINISHING

### 1169N/D4 011690024

**€ 111,50**

***Set of 1 heavy-duty combination pliers, 1 long needle nose pliers, 1 cutting nippers, chrome-plated, and 1 slip joint pliers with boxed joints, phosphated***

### 1031/S4 010310000

**€ 117,50**

***Set of 4 circlip pliers***

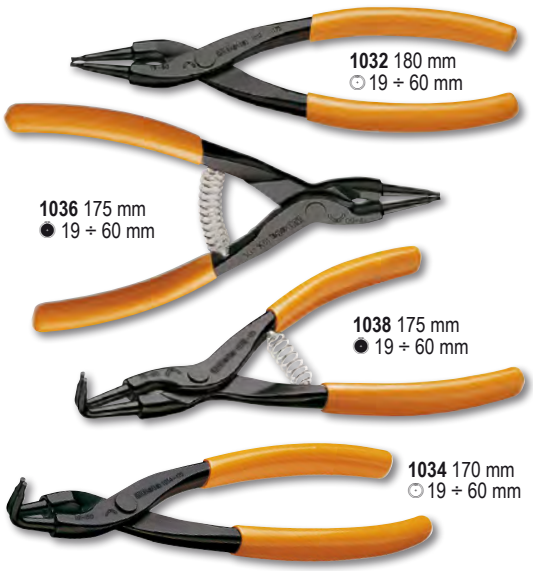


### 1150HPC 011500618

**€ 65,00**

***Heavy duty universal pliers with cutting edges made of sintered steel***

- The decentralized pin allows the fulcrum to be closer to the cutting point, thereby resulting in an improved lever effect.
- Perfect alignment of the nose and the thin profile allow the pliers to be used in very small areas.
- The body of the pliers is made of a reliable molybdenum steel which has been heat treated in order to be flexible and resistant so as to guarantee a safe grip in any moment.

***ABSOLUTELY GROUNDBREAKING REMARKABLE CUTTING CAPACITY***

| | |
|---|---|
| Shearing stress - static test = | -73% |
| Average life of cutting edges = (test ISO 5744) | +127% |
| Hardness of M2 steel cutting edges = | 65HRC |

PATENTED

# SLIP JOINT PLIERS, BOXED JOINTS, OUTSTANDING GRIP AND AMAZING HANDLING

# 1048N

**Induction hardened** teeth for longer durability

New tooth geometry for effective, **safe grip** on hexagonal and cylindrical profiles

**Contrast retainer** preventing accidental hand crushing

**Wider head/handle angle** for improved ergonomic handling

**Extraordinary handling and comfort** thanks to the large contact surface of the handle

*Up to 60 mm for the 300 mm size*

***UP TO EIGHT ADJUSTMENT OPTIONS***

**Other features:**
- Triangular section grip for a more comfortable contact surface
- Tapered head allowing access to small spaces
- Case-hardened nail for improved wear resistance
- The handles coated with innovative slip-proof PVC ensure a secure grip.
- Phosphated finish
- Made from chrome-vanadium steel

DIN ISO 8976




## 1048N

***Slip joint pliers, slip-proof PVC coated handles***

| | L mm | A Max mm | L1 mm | S mm | g | | € |
|---|---|---|---|---|---|---|---|
| **1048N 175** | 175 | 36 | 31 | 11 | 189 | 010480910 | **€ 28,00** |
| **1048N 250** | 250 | 46 | 38 | 13 | 354 | 010480915 | **€ 29,50** |
| **1048N 300** | 300 | 60 | 44 | 14,8 | 554 | 010480920 | **€ 44,00** |
| **1048N 400** | 400 | 96 | 81 | 19 | 1180 | 010480940 | **€ 81,00** |

**NEW!**

**1048N/D3** 010480923

**€ 101,50**

***Set of 3 slip joint pliers***

## 1048VN

***Slip joint pliers, boxed joints, with orange lacquered finish***

| | L mm | A Max mm | L1 mm | S mm | g | | € |
|---|---|---|---|---|---|---|---|
| **1048VN 175** | 175 | 36 | 31 | 11 | 189 | 010480111 | **€ 27,50** |
| **1048VN 250** | 250 | 46 | 38 | 13 | 354 | 010480116 | **€ 31,50** |
| **1048VN 300** | 300 | 60 | 44 | 14,8 | 554 | 010480121 | **€ 46,00** |

## 1199ESD/D3 011990003 € 122,00

NEW!

***Set of 1 flat long nose pliers, 1 diagonal axial cutting nippers and 1 semi-flush cutting nippers, ESD***

## 1052

***Adjustable self-locking pliers, concave jaws***

| | L mm | ø Max mm | g | | € |
|---|---|---|---|---|---|
| 1052/140 | 140 | 22 | 175 | 010520014 | € 28,00 |
| 1052/190 | 190 | 36 | 360 | 010520019 | € 31,50 |
| 1052/240 | 240 | 42 | 590 | 010520024 | € 34,00 |
| 1052/300 | 300 | 55 | 900 | 010520030 | € 56,50 |




## 1009L/DP-S2 010090060 € 80,00

***Set of 2 extra-long, knurled double swivel nose pliers***

## 437U/09 004370550

**€ 360,00**

***Assortment for repairing damaged threads***
*in metal case*

M5X0,8
M6X1,0
M8X1,25
M10X1,5
M12X1,75

370x230x55 mm

## 437P 004370003

**€ 49,50**

***Thread dresser, for repairing internal and external, right-hand and left-hand threads***

P 0,80-1,00-1,25-1,50-1,75-2,00-2,50-3,00 mm

## 419/SP7 004190507

**€ 77,00**

***Set of 7 hammer drill bits with SDS-plus seat***

- 2 cutters
- 4 spirals
- For drilling into walls, cement, concrete, stones

HVA~ 1650

**NEW!**

115x170x40 mm

## 412M/SP19 004120469

**€ 84,50**

***Set of 19 twist drills with cylindrical shanks, HSS, AISI M2, entirely grounded finishing***

- Self-centring
- High performance and cutting accuracy
- For drilling alloy steel, cast iron and metal in general

Ø 1÷10 x 0,5 mm

R ≤ 850 N/mm²
HV ≃ 820
DIN 338

115x170x40 mm

## 415CO/SP19A 004150440

**€ 148,00**

***Set of 19 twist drills with cylindrical shanks, HSS-CO 5%***

- For drilling holes into STAINLESS steel, alloy steel, cast iron, mild steel, light a lloys

Ø 1÷10 x 0,5 mm

R≤ 1200 N/mm²
HV ≃ 800÷860
DIN 338

115x170x40 mm

## 416P/SP19 004160469

**€ 149,50**

***Set of 19 twist drills with cylindrical shanks, made from HSS, AISI M2, with smaller drill for high-precision centring***

Ø 1÷10 x 0,5 mm

R ≤ 900 N/mm²
HV ~ 820÷850

***HIGHER DRILLING SPEED***

115x170x40 mm

## 451/C8 004510308

**NEW!**

**€ 347,00**

***Assortment of 8 hole cutters, HSS, entirely grounded***

- Maximum thickness: 4 mm

270x225x70 mm

## 446/C110 004460060

**€ 924,00**

***Assortment of 105 chrome-steel taps and dies, metric thread, and 5 accessories for car repair jobs***
*in wooden case*

| I III 430 M mm | 433 M mm | 440/440A M mm | 441/441A M mm |
|---|---|---|---|
| 2x0,4 | 6x0,75 - 7x0,75 | 2x0,4 | 6x0,75 - 7x0,75 |
| 3x0,5 | 8x0,75 -8x1 | 3x0,5 | 8x0,75 -8x1 |
| 4x0,7 | 9x0,75 - 9x1 | 4x0,7 | 9x0,75 - 9x1 |
| 5x0,8 | 10x0,75 -10x1 | 5x0,8 | 10x0,75 -10x1 |
| 6x1 | 10x1,25 - 11x0,75 | 6x1 | 10x1,25 - 11x0,75 |
| 7x1 | 11x1 - 11x1,25 | 7x1 | 11x1 - 11x1,25 |
| 8x1,25 | 12x0,75 - 12x1 | 8x1,25 | 12x0,75 - 12x1 |
| 9x1,25 | 12x1,25 - 12x1,5 | 9x1,25 | 12x1,25 - 12x1,5 |
| 10x1,5 | 14x1 - 14x1,25 | 10x1,5 | 14x1 - 14x1,25 |
| 11x1,5 | 14x1,5 - 16x1 | 11x1,5 | 14x1,5 - 16x1 |
| 12x1,75 | 16x1,5 - 18x1,5 | 12x1,75 | 16x1,5 - 18x1,5 |
| 14x2 | | 14x2 | |
| 16x2 | | 16x2 | |

435/0 435/3 444/1 444/2 436/1

500x337x60 mm

## 1545/C5M 015450011 € 585,00

***Puller 1542/1 with 5 extractors 1544***

| | A mm | C mm |
|---|---|---|
| 1544/1 | 9÷12 | 0,80 |
| 1544/2 | 13÷17 | 1,15 |
| 1544/3 | 16÷21 | 1,70 |
| 1544/4 | 20÷25 | 1,65 |
| 1544/5 | 25÷30 | 2,00 |

265x180x45 mm



## 1430/S5 014300105

**€ 27,00**

***Set of 5 tapered extractors for broken screws and studs, made from hardened steel*** *in case*

1430/1-1430/2-1430/3
1430/4-1430/5

110x150x40 mm

## 1500

***Two-leg universal pullers***

- For both external and internal use
- Legs can be moved along crosspiece with stop nuts




| | A min÷Max mm | L mm | L1 mm | ⬢ mm | A1 min÷Max mm | | € |
|---|---|---|---|---|---|---|---|
| 1500/1 | 25÷80 | 100 | 135 | 17 | 70÷130 | 015000301 | € 89,50 |
| 1500/2 | 25÷130 | 100 | 135 | 17 | 80÷180 | 015000302 | € 93,50 |
| 1500/3 | 50÷160 | 150 | 210 | 22 | 105÷220 | 015000303 | € 155,50 |
| 1500/4 | 60÷200 | 150 | 210 | 22 | 120÷270 | 015000304 | € 213,50 |
| 1500/5 | 80÷250 | 205 | 280 | 27 | 160÷330 | 015000305 | € 388,00 |
| 1500/6 | 80÷320 | 205 | 280 | 27 | 160÷420 | 015000306 | € 455,00 |
| 1500/7 | 110÷520 | 205 | 280 | 27 | 195÷600 | 015000307 | € 681,00 |
| 1500/8 | 170÷640 | 230 | 310 | 36 | 260÷715 | 015000308 | € 1.090,00 |

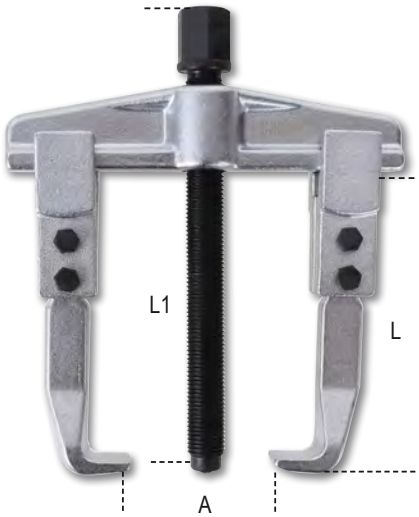


# BETA'S PULLER 1517C

Relies on a leg self-locking mechanism triggered by the spring on the crosspiece. This feature makes it easy to position and lock the puller on the part to remove. After the puller has been fixed in place, the legs can be locked by means of the ring nut.
The peculiar crosspiece has 4 seats which allow the 1517C puller to be used with both 2 legs – for easier, quicker jobs – and 3 legs – for increased firmness.
The shear pin on the screw head breaks when the maximum permissible torque is exceeded, thereby protecting the puller from overloads.

## 1517C

***Combination two/three-leg self-locking pullers***

- Leg holder with configuration for 2- or 3-leg use
- Simultaneous leg opening
- Self-locking effect
- With shear pin
- Size 2 with screw extension (total length of screw with extension: 380 mm)

| | A min÷Max mm | L mm | L1 mm | ⬢ mm | | € |
|---|---|---|---|---|---|---|
| 1517C/0 | 12÷140 | 145 | 250 | 18 | 015170500 | € 236,00 |
| 1517C/1 | 20÷180 | 200 | 300 | 18 | 015170501 | € 290,00 |
| 1517C/2 | 30÷280 | 270 | 300 | 18 | 015170502 | € 360,00 |

## 33NR NEW!

***Number punches***

- For engraving steel with resistance R up to 80 kg/mm²
- Kit of 9 punches: numbers 0 to 9

| | H mm | L mm | A mm | | € |
|---|---|---|---|---|---|
| 33NR 3 | 3 | 61 | 6,35 | 000330003 | € 22,80 |
| 33NR 4 | 4 | 62 | 7,93 | 000330004 | € 27,50 |
| 33NR 5 | 5 | 62 | 7,93 | 000330005 | € 27,50 |
| 33NR 6 | 6 | 68 | 9,52 | 000330006 | € 33,50 |
| 33NR 8 | 8 | 71 | 12,7 | 000330008 | € 49,00 |

## 33LT NEW!

***Letter punches***

- For engraving steel with resistance R up to 80 kg/mm²
- Kit of 27 punches: letters A to Z + &

| | H mm | L mm | A mm | | € |
|---|---|---|---|---|---|
| 33LT 3 | 3 | 61 | 6,35 | 000330023 | € 64,00 |
| 33LT 4 | 4 | 62 | 7,93 | 000330024 | € 78,00 |
| 33LT 5 | 5 | 62 | 7,93 | 000330025 | € 78,00 |
| 33LT 6 | 6 | 68 | 9,52 | 000330026 | € 96,00 |
| 33LT 8 | 8 | 71 | 12,7 | 000330028 | € 144,00 |

## 1370

***Mechanic's hammers***
*wooden shaft*

UNI 7778 DIN 1041

| | g | g | | € |
|---|---|---|---|---|
| 1370/300 | 300 | 439 | 013700053 | € 16,30 |
| 1370/500 | 500 | 669 | 013700055 | € 19,90 |
| 1370/800 | 800 | 949 | 013700058 | € 26,00 |
| 1370/1000 | 1000 | 1180 | 013700060 | € 31,00 |
| 1370/1500 | 1500 | 1722 | 013700065 | € 35,50 |
| 1370/2000 | 2000 | 2181 | 013700070 | € 42,00 |

## 31BM/D6 000310420

**€ 110,00**

***Set of 6 pin punches***
*with handles*

Ø 2-3-4-5-6-8 mm

## 32AU 000320160 € 57,00

***Automatic centre punches***




## 1370T

***Mechanic's hammers***
*fibre shaft*

| | g | g | | € |
|---|---|---|---|---|
| 1370T/300 | 300 | 452 | 013700630 | € 24,10 |
| 1370T/500 | 500 | 663 | 013700650 | € 26,50 |
| 1370T/800 | 800 | 1017 | 013700680 | € 28,00 |
| 1370T/1000 | 1000 | 1279 | 013700700 | € 35,50 |
| 1370T/1500 | 1500 | 1740 | 013700750 | € 41,50 |

## 1390

***Soft face hammers,***
*wooden shaft*

UNI 7784

| | Ø mm | g | | € |
|---|---|---|---|---|
| 1390/22 | 22 | 134 | 013900022 | € 19,90 |
| 1390/28 | 28 | 230 | 013900028 | € 24,70 |
| 1390/35 | 35 | 365 | 013900035 | € 33,50 |
| 1390/45 | 45 | 689 | 013900045 | € 53,50 |
| 1390/60 | 60 | 1462 | 013900060 | € 90,50 |

## 1719BMR/B3 017190358 € 52,50 NEW!

***Set of 3 second-cut rasps, with handles,***
*in hanging wallet*

## 1650

DIN 862
UNI EN ISO 13385-1

***Sliding gauge made from hardened stainless steel***

- Reading to 0.05 mm
- Spring locking

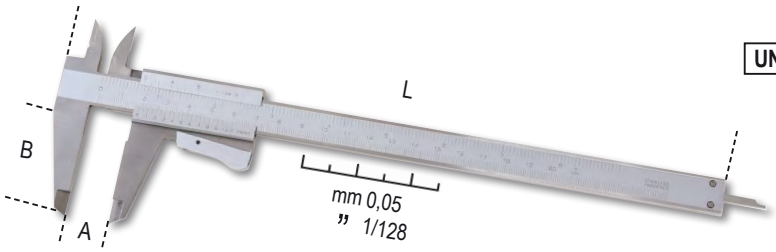

| | A Max mm | L mm | B mm | G mm | | € |
|---|---|---|---|---|---|---|
| 1650/150 | 150 | 150 | 40 | 0,05-1/128 | 016500001 | € 64,50 |
| 1650/200 | 200 | 290 | 49 | 0,05-1/128 | 016500002 | € 85,00 |

## 1651DGTB

DIN 862
UNI EN ISO 13385-1

***Digital vernier, reading to 0.01 mm***

- Screw slider locking
- Mm/inch conversion
- Zero setting at any position
- Square depth rod up to 300 mm
- In hard plastic case

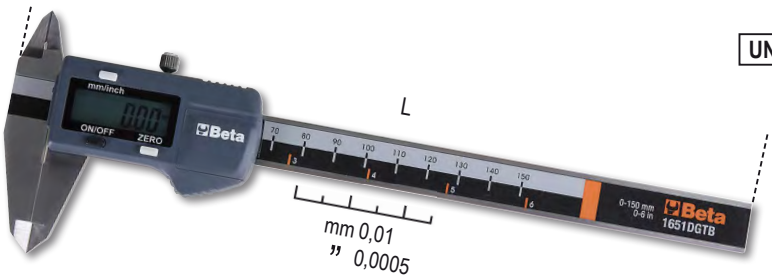


| | A Max mm | L mm | B mm | G mm | | € |
|---|---|---|---|---|---|---|
| 1651DGTB 150 | 150 | 235 | 40 | 0,01-0,0005 | 016510211 | € 109,00 |
| 1651DGTB 200 | 200 | 285 | 50 | 0,01-0,0005 | 016510212 | € 142,00 |
| 1651DGTB 300 | 300 | 400 | 60 | 0,01-0,0005 | 016510213 | € 185,50 |




## 1674C 016740230 € 20,10 NEW!

***Carpenter's combination square with steel blade***

- Double mm scale
- Surface level

## 1691MG

***Measuring tapes with fixed magnets***

- Shock-resistant ABS casings
- Steel tapes
- Precision class: II

| | L m | S mm | | € |
|---|---|---|---|---|
| 1691MG/5 | 5 | 25 | 016910405 | € 15,30 |
| 1691MG/8 | 8 | 25 | 016910408 | € 21,40 |
| 1691MG/10 | 10 | 25 | 016910410 | € 22,60 |




***MAGNETIC***

## 1693L 40

016930040

**€ 158,50**

IP54

***Laser distance meter, multipurpose, 40 m, with positioning levels***

***40 m***

**MEASUREMENTS:**
- Single distance measurement
- Continuous measurement or minimal measurement

**FUNCTIONS:**
- Addition/subtraction
- Area measurement
- Volume measurement
- Variable indirect measurement (Pythagorean measurement)
- Tilt measurement

- Auto power off
- Battery life: up to 5,000
- Soft cloth case (included) measurements

**TECHNICAL DATA:**
- Measurement range: 0.05 ÷ 40 m (0.2in ÷ 131f)
- Scale selection: m, in, ft
- Measurement accuracy: ±1.5 mm (± 0.06 in)
- Laser class: 2
- Max. storage: 99 units
- Batteries: AAA 2 x 1.5V

***POSITIONING LEVELS***

## 1693M 80

016930080

**€ 221,50**

IP54

***Laser distance meter, multipurpose, 80 m***

***80 m***

**MEASUREMENTS:**
- single distance measurement
- continuous measurement or minimal measurement

**FUNCTIONS:**
- addition/subtraction
- area measurement
- volume measurement
- indirect measurement (Pythagorean measurement)
- tilt measurementione

- Auto off feature
- Soft cloth case (included)
- Battery life: up to 4,000 measurements

**TECHNICAL DATA**
- Measurement range: 0.05 ÷ 80 m (0.2 in ÷ 229f)
- Scale selection: m, in, ft
- Measurement accuracy: ±1,5 mm (± 0.06 in)
- Laser class: 2
- Max. storage: 99 units
- Battery: AAA 2 x 1.5V



## 1696B

***Spirit levels with magnetic bases made from anodized profiled aluminium, 2 unbreakable vials***

- Precision 1 mm/m

| | L mm | H mm | S mm | | € |
|---|---|---|---|---|---|
| 1696B 200 | 200 | 49 | 22 | 016960202 | € 35,50 |
| 1696B 300 | 300 | 49 | 22 | 016960203 | € 37,00 |
| 1696B 400 | 400 | 49 | 22 | 016960204 | € 39,00 |
| 1696B 500 | 500 | 49 | 22 | 016960205 | € 47,50 |
| 1696B 600 | 600 | 49 | 22 | 016960206 | € 50,00 |

## 1697 30 016970030 € 271,00

***Cross laser level, 30 metres, green beam, with magnetic base and wall-mount bracket,*** *in case*

- Self-levelling cross
- Self-levelling function can be switched off for manual use
- Laser diode 515 Nm, class 2
- Working range: 30 m
- Accuracy: ± 1 mm at 5 m
- Self-levelling range: 3° ± 0.5°
- Body made of ABS and nonslip rubber
- 1/4" female drive
- 2xAA batteries
- Battery life: 4 hours

***30 m***

BASE:
- 1 magnetic base for individual and combined use, 1/4" male drive
- 1 adjustable tightening bracket for several wood and metal profiles (for use in combination with magnetic base)
- quick horizontal and vertical alignment at a 90° angle

IP55

320x230x90 mm

## 1760/RMS 017600020

**€ 316,00**

IP67

***Industrial digital multimeter accurate and sturdy, in a 6-mm co-moulded shell, with antislip, shockproof outer rubber part***

- Water protection IP67
- Protection up to 1000V
- Tested for accidental falls up to 2 m
- Protected inlets
- Autoranging
- Large direct reading display, backlit, blue
- K type temperature probe (included)
- Self-power down
- Rubber terminal base for enhanced operating comfort
- Double insulated terminals,1000V, 1 m long
- Supplied in a soft case
- CAT IV 600V/ CAT III 1000V
- Actual effective value TRUE RMS

| | Measuring range | Base accuracy |
|---|---|---|
| AC/DC voltage | 110mV – 600V ±0.8% | - ±2% rdg |
| AC/DC current | 110µA – 10A ±1.5% | - ±2% rdg |
| Resistance | 110Ω – 40MΩ ±1.2% | - ±2.5% rdg |
| Capacity | 11nF – 40mF ±5% | - ±10% rdg (up to 11mF) |
| Frequency | 1100Hz – 110 MHz ±1.2% | - ±1.5% rdg |
| Temperature | -32°C – +1000°C ±3% | - ±5% rdg |
| Diode test | 3V DC ±10% rdg | |
| Continuity test | <30 Ω | |

## 1760S 017600022

**€ 91,00**

IP40

***Compact digital multimeter***

- IP40 protection
- Autoranging
- Large direct reading display, backlit, blue
- Self-power down
- Low battery indication
- Supplied in a soft case
- CAT III 600V
- TRUE RMS (actual effective value)

**Measurable parameters:**
DC voltage: 200 mV-2/20/200/600V
AC voltage: 100/600V
DC current: 200 mA-10 A
AC current: 0,01-10 A
Resistance: 200Ω - 2/20/200 kΩ - 2 MΩ
Diode test: 0.4 ÷ 0.7
Power supply: 2 1.5V batteries, type AAA

## 1760TMC 017600710 € 896,00

***Infrared thermal camera***

- LCD TFT display, 2", 240x320
- Sensor, 32x32 pixels
- Acquisition frequency 7Hz
- Thermal sensitivity <347mK
- Automatic acquisition of hot and cold spots camera for acquisition of images in BMP format (max. 100 images) adjustable emissivity
- Power supply: 3 alkaline AAA batteries
- USB interface
- Temperature range: -20 °C ÷ +600 °C
- Infrared band: 6.5÷14µm
- visible/infrared image fusion: 0.5; 1; 2m
- Alarm function, selecting acceptable maximum and minimum temperatures

***Compact thermal camera for contactless temperature measurement, suitable for applications in building, mechanical, electric installation and heating industries***

***TEMPERATURE RANGE -20 ÷ +600°C***

IP54

**Since 2022 the established, authoritative welding specialist, Helvi, and Beta Utensili have been working together to develop ground-breaking technologies. This joint effort has translated into the new range of Beta by Helvi welding machines, which boast ultimate performance in line with its high quality standards.**

Easy-to-use inverter welding machines with excellent welding characteristics for all types of electrodes. With overvoltage and overtemperature control and electrode anti-sticking function. Compact and lightweight, ideal for home maintenance jobs, light carpentry and maintenance jobs.

## 1860BH

***DC-powered inverter welding machine for MMA welding with rutilic, basic and stainless steel electrodes.***

***Arc force, hot start, anti-sticking and thermostatic protection features.***

***COMPACT AND EASY TO CARRY***

Supplied with 16mm² cables

| 1860BH/120A | 1860BH/160A | 1860BH/200A |
|---|---|---|
| 018600121 | 018600161 | 018600201 |
| € 381,00 | € 491,00 | € 546,00 |

| | | | |
|---|---|---|---|
| **Adjustment current** | 10÷**120A** | 10÷**160A** | 10÷**200A** |
| **Power supply** | 1x230V | 1x230V | 1x230V |
| **Use factor (40 °C)** | 25% - 120 A<br>50% - 80 A<br>100% - 60 A | 25% - 160 A<br>60% - 100 A<br>100% - 80 A | 25% - 200 A<br>60% - 130 A<br>100% - 100 A |
| **Protection** | IP22S | IP22S | IP22S |
| **Usable electrodes** | Ø 1.6 - 3.2 mm rutilic, basic, stainless steel, cast iron etc. | Ø 1.6 - 4 mm rutilic, basic, stainless steel, cast iron etc. | Ø 1.6 - 4 mm rutilic, basic, stainless steel, cast iron etc. |
| **Dimensions** | 290x120x210 mm | 290x120x210 mm | 290x120x210 mm |
| **Weight** | 3,5 kg | 3,7 kg | 3,9 kg |

## 7042LCD 070420001 € 220,00

***Auto-darkening LCD mask, for electrode welding; MIG/MAG; TIG and plasma.***
*Solar cells power supply and lithium batteries for outstanding LCD filter life*

- Viewing area: 98x43 mm
- Darkening shade: DIN 9-13, externally adjustable
- UV/IR protection
- Light to dark time: 1/25000 s
- Dark to light time: 0.25-1s
- Adjustable darkening sensitivity and delay
- Auto on/off
- Grinding feature
- Optimized shape to make it easier to breathe with pulled-down screen

## 7043 070430001 € 127,50

***Auto-darkening LCD mask, for electrode welding, MIG/MAG, TIG and plasma,***
*solar cell power supply*

- Viewing area: 92x43 mm
- Darkening shade: DIN 9-13, externally adjustable
- UV/IR protection
- Light to dark time: 1/1000 s
- Dark to light time: 0.1-1.0 s
- Adjustable darkening delay
- Auto on/off
- Grinding feature
- Optimized shape to make it easier to breathe with pulled-down screen

## 1860BHT/KT 018600680 NEW! € 1.165,00

***DC-output welding machine kit, for MMA and TIG electrode welding, TIG welding torch included***

Arc force, hot start, anti-sticking and thermostatic protection features.

Supplied with 25 mm² cables

| | |
|---|---|
| **Adjustment current** | 10÷160A |
| **Power supply** | 1x230V |
| **Use factor (40 °C)** | 35% - 160 A<br>60% - 130 A<br>100% - 95 A |
| **Protection** | IP23S |
| **Usable electrodes** | Ø 1,6 - 4 mm<br>rutilic, basic, stainless steel |
| **Dimensions** | 360x140x230 mm |
| **Welding machine weight** | 6,2 kg |
| **Torch length** | 4 m |

## 7041LCD/4S 070410001 € 314,00

***Auto-Darkening LCD mask, for electrode welding; MIG/MAG; TIG and plasma. 4 sensors with TRUE COLOR filter.***
*Solar cell power supply and lithium batteries for outstanding LCD filter life*

- Viewing area: 98x80 mm
- Darkening shade range: 5÷8.5/ 9-13, internally adjustable
- UV/IR protection: DIN16
- Light to dark time: 1/25000 s
- Dark to light time: 0.1-2.0s
- Adjustable darkening sensitivity and delay
- Auto on/off
- Grinding feature
- Low battery indicator
- Ergonomic design, lightweight, well-balanced
- With adjustable ring nut

## 1860M 018600301 € 98,00

***Magnetic, quick-adjusting corner welding vices***

Strong magnets for immediate clamping of metallic parts to be welded



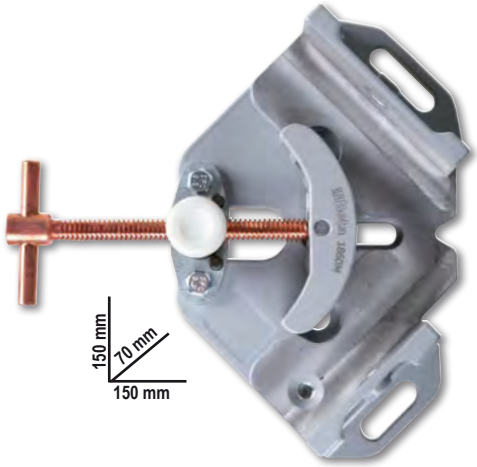


***SWINGING JAWS***
***IDEAL FOR LOCKING DIFFERENTLY SIZED PARTS***

## 1860RG 018600255 € 63,50

***Adjustable magnetic square, 30°÷270°***

- Ideal for locking tubular or flat parts
- 15 kg magnetic force
- Supplied with an offset hexagon key wrench for locking angle adjustment mechanism
- Supplied with a pin for locking angle adjustment mechanism at 30°-45°-90°/270°-180°
- With hexagon hole making it easier to separate magnet from metal

## 1860SQ 018600210 € 96,50

***Magnetic square, 45°/90°***

- Ideal for locking tubular or flat parts
- 25 kg magnetic force
- No battery required, ON/OFF effect obtained by tilting interior magnets
- Easier chip removal with magnets in OFF position

## 1827/K 018270100 € 241,50

***Gas soldering iron with 7 accessories in case with soft polyethylene foam base***

- Power: 30 watts to 125 watts
- Tip temperature can be adjusted between 250 °C and 500 °C
- Gas flow regulator
- Warm-up time: 15 seconds
- Tank contains gas for 120 minutes' non-stop operation
- Clear tank for monitoring gas level
- Can be refilled with butane gas

## 332 — 003320001 — € 24,60

***Mini pipe cutter for copper and light alloy pipes***

| L mm | Ø mm " |
|---|---|
| 59 | 3÷16 1/8"÷5/8" |

## 342 — 003420030 — € 55,50

***Ratchet-type shears for plastic pipes***

IPX4

## 361N — 003610014 — € 76,50

***Adjustable lever pipe wrench***

- Fast and easy one-handed operations
- Heavy duty model
- Self-locking/adjustingtype

| L mm | Ø max " | Ø max mm |
|---|---|---|
| 350 | 1" 1/2 | 49 |

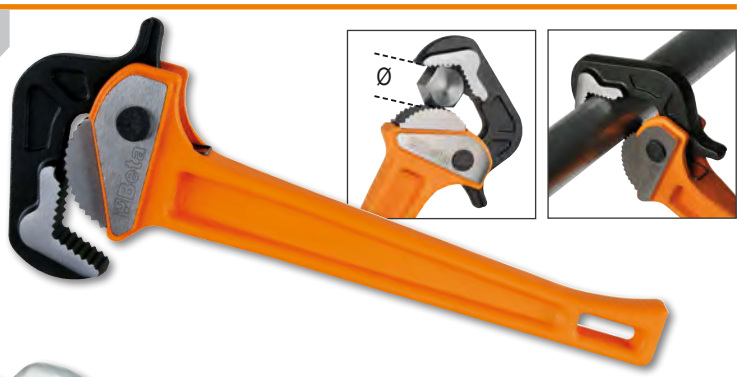


## 363

***Heavy duty pipe wrenches made from light alloy***

| | L mm | Ø " | Ø mm | | € |
|---|---|---|---|---|---|
| 363 350 | 350 | 2" gas | 60 | 003630035 | € 70,50 |
| 363 450 | 450 | 2 1/2" gas | 76 | 003630045 | € 95,00 |
| 363 600 | 600 | 3" gas | 90 | 003630060 | € 160,50 |
| 363 900 | 900 | 5" gas | 140 | 003630090 | € 301,00 |
| 363 1200 | 1200 | 6" gas | 165 | 003630120 | € 319,00 |

## 1750KG10 — 017500100

**€ 204,50**

***Lever-operated grease gun, 10 kg, with high-pressure hose, 2 m***

- Complete with swivel fitting, to avoid choking hose
- Die-cast aluminium pump body with check valve

3 different pressure levels available:
- 4 g at 275 bar
- 7 g at 206 bar
- 9 g at 137 bar

## 1750 — 017500500

**€ 45,50**

***Lever operated grease guns, 500 cc***

***550 BAR***

## 1599F

***Parallel bench vices, forged***

- Fully steel cast
- Milled and hardened jaw surface
- Front opening
- High clamping depth

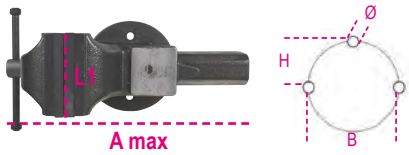


## 1599G

***Pairs of aluminium jaw covers***

| | L1 mm | BxH mm | Ø mm | A max mm | | € |
|---|---|---|---|---|---|---|
| 1599F 100 | 100 | 92x46 | 11 | 125 | 015990100 | € 345,00 |
| 1599F 125 | 125 | 108x54 | 13 | 150 | 015990125 | € 441,00 |
| 1599F 150 | 150 | 125x62 | 13 | 200 | 015990150 | € 619,00 |
| 1599F 175 | 175 | 140x70 | 15 | 220 | 015990175 | € 845,00 |

| | | € |
|---|---|---|
| 1599G 100 | 015990910 | € 55,50 |
| 1599G 125 | 015990912 | € 57,50 |
| 1599G 150 | 015990915 | € 63,00 |
| 1599G 180 | 015990917 | € 70,00 |

## 1852R1750 — 018520175 — € 1.580,00

***Portable induction heater***

- Heats and loosens stubborn bolts, hubs and bearings without using flames
- Allows any type of ferromagnetic metal to be heated

**Technical data:**
- Input voltage: 230V AC, 50/60 Hz
- Input current: max. 7.5 A
- Power: max. 1.75 kW

**BENEFITS**
1 Time saving: quick, extremely accurate heating
2 Fire safety: does not produce flames, maximum operator safety
3 Functional: can be used with one hand, and coils can be easily interchanged

**FIELDS OF APPLICATION**
- Automotive industry
- Industrial maintenance
- Aviation industry
- Naval industry
- Petrochemical industry

| Standard equipment: | |
|---|---|
| Two front attachable coils, Ø 19 and 26 mm, for loosening nuts | |
| One flat coil for heating surfaces | |
| One flexible coil, 800 mm long | |

480x370x130 mm

***MAXIMUM SAFETY WITHOUT USING FLAMES***

## 1149F — 011490010 — € 18,60

***Front wire stripping pliers with cutting blade, self-adjusting***

- Self-adjustment to wire diameters
- Adjustable stripping length
- Insulating cutting pressure adjustment
- Built-in cutting devic

0,2÷6 mm²

## 1609B — 016090101 — € 342,00

***Mechanical crimping pliers***

- For noninsulated copper terminals, 10÷120 mm²
- Antislip rubber handle
- Internal "H" section pin for unparalleled punch smoothness
- Made from burnished steel

10÷120 mm²

***L 600 mm***

## 1740B

***Compact heavy-duty riveting pliers***

- Optimized lever ratio for increased compactness and handiness.
- 3 jaws lock rivet for a perfect grip.
- Adjustable head for pulling rivet by 2 to 5 leg movements.

*3 JAWS: IMPROVED RIVET GRIP*

*WITH STEM TANK*

| | mm steel | | € |
|---|---|---|---|
| 1740B 280 | 2,4÷4,8 | 017400280 | € 78,50 |
| 1740B 330 | 2,4÷6,4 | 017400330 | € 91,00 |

## 1741U 017410450 € 49,00

***Ultra compact riveting pliers with adjustable force***
*with 4 interchangeable nozzles*

*3 JAWS: IMPROVED RIVET GRIP*

*L 200 mm*

| Ø mm | 2,4 | 3 | 3,2 | 4 | 4,8 |
|---|---|---|---|---|---|
| Aluminum | • | • | • | • | • |
| Steel | • | • | • | • | |
| Inox | • | • | • | • | |

## 1741B 017410000 € 41,50

***Riveting pliers supplied with 4 interchangeable nozzles***

*L 250 mm*

| Ø mm | 2,4 | 3,2 | 4 | 4,8/5 |
|---|---|---|---|---|
| Aluminum | • | • | • | • |
| Steel | • | • | • | • |
| Inox | • | • | • | |

## 1870I 018700220 € 274,00

***Solid and fluid vacuum cleaner, 20 l, stainless steel drum***

**TECHNICAL SPECIFICATIONS:**
- single-stage by-pass motor
- voltage: 230/240 V
- frequency: 50/60 Hz
- max. power: 1200 W
- airflow rate: 58 l/sec.
- max. suction pressure: 190 mbar
- max. drum capacity: 20 l, made of stainless steel
- acoustic emissions: <70 dB(A)
- cable length: 5 m

**STANDARD ACCESSORIES Ø 36 mm**
- 1 corrugated hose with ergonomic handle and vent
- 2 hard extension tubes
- 1 multiuse brush for floors and fluids
- 1 flat nozzle
- 1 paper bag

**FILTERING SYSTEMS**
- 1 surface air filter cartridge 1900 cm² - 12 µm nom.
- 1 anti-foam filter PPI 45/PPI 30

IPX4

*NON-MARKING WHEELS*

## 1749A 017490010 € 46,00

***Bonding gun, professional model aluminium tube***

## 1749AC 017490005 € 41,00

***High thrust gun for chemical binders***

## 1833

***High-brightness LED torch, made of sturdy anodized aluminium***

- Adjustable focus
- 2 brightness settings

2xAA Not included · 500 LUMEN · IP66

***Battery life 10.0 h - L 150 mm***

**1833 S** 018330002 **€ 39,50**

3xAAA Not included · 700 LUMEN · <15%

***Battery life 7.5 h - L 162 mm***

**1833 M** 018330003 **€ 49,50**

## 1833 L/USB 018330054 € 121,50

***Rechargeable high-brightness LED torch, made of sturdy anodized aluminium, up to 1,200 lumens***

- Adjustable focus
- 3 brightness settings
- Battery life: 3.0h
- Charging via USB-C port
- Charger not included

*L 240 mm*

3 · <15% · IP66 · USB-C · 1200 LUMEN

## 1838SLIM 018380221

**€ 75,50**

***Rechargeable, articulated slim 3-LED inspection lamp***

- Magnetic base
- Charging time: 2.5h
- Battery life: 2-4h/ spot 3h

**Triple light emission**
- front: 100/200 lumens
- back: 180 lumens
- spot (head): 80 lumens

2-4h Spot 3h · 2.5 h · IP65 · 307x29x17 mm

*L 307 mm*

## 1838AM 018380400

**€ 112,00**

***Rechargeable LED inspection lamp, with double light emission, articulated, can be rotated 180°, with swivel magnetic base and hook***

- **Double light emission:** front: LED COB, 60-700 lumens, can be adjusted with potentiometer spot (head): LED SMD, 120 lumens, ON-OFF switch
- Rechargeable 3.6V 2600mAh Li-ion battery
- With USB-C port
- Supplied with 100-240V / 50-60Hz charger
- Charging time: 4h
- Battery life: front: 2.5-16h spot (head): 10h
- 3-LED battery level indicator
- Articulated, can be rotated 180° (± 90° compared to axis)
- Magnetic base (with neodymium magnet), can be rotated 90°
- Swivel base hook
- IP54
- IK07

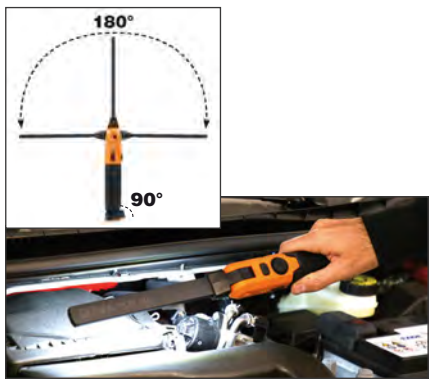


*L 405 mm*

120 LUMEN · 700 LUMEN · 4 h · 2,5-16h Spot: 10h · 405x40x45 mm · IP54

## 1837C

***Rechargeable LED spotlight for building yards***

- 3 brightness settings
- battery charger: input: 100-240V AC - 50/60Hz; output: 15V 1.5A
- charging time: 4 hours
- 3-LED charge indicator
- can rotate up to 180°
- IP65
- IK07

### 1837C/2100 018370210

**€ 197,00**

220x225x70 mm

*500/1000/2100 lumen*

### 1837C/4300 018370430

**€ 289,00**

266x236,6x59 mm

*1100/2100/4300 lumen*

## 1838FLASH 018380300

**€ 349,00**

***Rechargeable, ultracompact spotlight,*** *designed to offer the best possible solution for each use*

- IP65 - without external power supply
- Dual brightness: 300/720 lumens
- Lithium polymer battery 7.4 V 4000 mAh

4-8h

85x100x155 mm

## 1838COB 018380010

**€ 97,00**

***Compact rechargeable inspection lamp with ultra-brightness LED***

- Lithium polymer battery
- Compact body made of antislip rubber
- Swinging hook
- Magnetic base can be rotated 180 degrees
- With charger 100-240Vac / 50-60Hz
- 100/200 lumens - spot 75 lumens
- Operating range: 5 / 2.5 hours
- IP65

120x59x25 mm



## 1838/11LED 018380111

**€ 171,00**

***Rechargeable inspection lamp with ultra-high brightness LEDs,*** *lithium polymer battery*

- Compact body made of antislip rubber
- With charging station, 110-230Vac

With multidirectional head LED

With head LED

Swinging hook

## 1838E 018380270

**€ 191,50**

***Rechargeable under bonnet LED lamp***

- Triple light emission: 500/1000/2000 lumens
- Can be rotated 360°
- Length range: 116 ÷ 188 cm
- Aluminium body
- Nonslip rubber hooks
- USB-C charge
- Supplied with battery charger Input: 100-240V ~ 50/60Hz Output: DC 5V - 2000 mA
- Battery life: 3-9 h
- IP20 • IK07

**2 charging modes:**
- **charge via lamp USB port**
- **charge via internal battery USB port**

### 1838E-BT 018380271

**€ 54,00**

***Rechargeable battery with USB-C port for under bonnet lamp item 1838E***

- Li-Ion 3,6V
- DC 5V - 2000 mA

# WIRELESS RECHARGEABLE

## 1833XSW 018330011 € 49,50

NEW!

***LED inspection torch, wireless rechargeable***

- Two brightness settings: LED SMD, 250 - 80 Lumen
- Rechargeable battery: 3.7V 700 mAh., 2.59 Wh Li-ion
- Two charging modes:
  - wireless base 1839BRW
  - power supply with USB-C port
- Charging time:
  - 2h with wireless charging base
  - 2h with power supply
- Battery life: 2-8h
- LED battery level indicator
- Magnets on base and back
- Belt clip
- USB-C cable included
- IP54
- IK07

80/250 lumen | SMD | 2 h | Wireless: 2 h | 2-9 h | 700 mAh Li-ion 3.7 V | -10°C + 40°C | IP54 | 145x25x21 mm

## 1833MW 018330013 € 90,50

NEW!

***High-brightness LED torch, wireless rechargeable***

- Four brightness settings: LED SMD, 1000 - 400 - 30- 5 Lumen
- Rechargeable battery: 3.7V 2600 mAh, 9.62 Wh Li-ion
- Two charging modes:
  - wireless base 1839BRW
  - power supply with USB-C port
- Charging time:
  - 6h with wireless charging base
  - 4h with power supply
- Battery life: 2-200h
- 3-LED battery level indicator
- Magnet on back
- USB-C cable included
- IP68
- IK07

1000-400-30-5 Lumen | SMD | 4 h | Wireless: 6 h | 2-200 h | 2600 mAh Li-ion 3.7 V | -10°C + 40°C | IP68 | 40x40x160 mm

## 1836AW 018360051 € 74,50

***Rechargeable wireless LED headlamp, dual brightness***

- Rechargeable battery: Li-Ion 3.7 V, 1500 mAh, 5.55 Wh
- USB-C port
- Supplied with USB-C cable
- Charging time:
  - 2.5 h with power supply
  - 4.5h with wireless charging base
- Battery life:
  front: 4-18 h
  head (spotlight): 4 h
- IP65
- IK07

- **Dual light emission:**
  - front: 3 light intensities, LED COB, 30 - 200 - 400 lumens
  - head (spotlight): LED COB, 400 lumens

Front: 30/200/400 lumen Spot: 400 lumen | Front: COB LED Spot: COB LED | 2,5 h | Wireless: 4.5 h | 4-18 h Spot: 4 h | Li-ion 3.7V 1500mAh 5.55Wh | 70x52x45 mm | IP65

# WIRELESS RECHARGEABLE

## 1838POCKET 018380080 € 70,50

***Articulated pocket LED spotlight, with dual light beam and wireless charging***

- Rechargeable 3.7V 2600mAh Li-ion battery
- 2 charging modes:
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 4.5 h with wireless charging base
  - 4 h with power supply
- Battery life: - main light: 3-9h
  - spot light: 4.5 h
- 3-LED battery level indicator
- Can be rotated 210°
- Nonslip rubber body
- Magnetic base
- 1 magnet on base
- Supplied with a USB-C cable
- IP65
- IK07

800 LUMEN

- **Dual light emission:**
  - main light: LED COB, 3 light intensities: 160 - 400 - 800 lumens
  - spot light: LED SMD, 250 lumens
- **Lighting angle:**
  - main light: 160°
  - spot light: 18°

Front: 160/400/800 lumen Spot: 250 lumen | Front: COB LED Spot: SMD LED | 4 h | Wireless: 4.5 h | 3-9h Spot: 4.5 h | 3.7V 2600mAh Li-ion | -10°C + 40°C | 98x82x39 mm | IP65

## 1838SW 018380142 € 100,50

***Rechargeable, articulated LED inspection lamp and wireless charging***

- Rechargeable 3.6V 3.350mAh Li-ion battery
- 2 charging modes:
  - wireless 1839BRW base
  - power supply with USB-C port
- Charging time:
  - 6.5h with wireless charging base
  - 4.5h with power supply
- Battery life: - front: 3-5h
  - spot (head): 7h
- 3-LED battery level indicator
- Base can be rotated 180°
- Nonslip rubber body
- Double swinging hook
- Magnets on base and back
- IP65
- IK07

200 LUMEN

1000 LUMEN

- **Dual light emission:**
  - front: LED COB, 3 light intensities: 250 - 500 - 1000 lumens
  - spot (head): LED SMD, 200 lumens



Front: 250/500/1000 lumen Spot: 200 lumen | Front: COB LED Spot: SMD LED | 4,5 h | Wireless: 6.5h | 3-5h Spot: 7 h | 3.6V 3.350mAh Li-ion | -10°C + 40°C | 260x53x40 mm | IP65

## 1839BRW 018390002 € 95,00

***Wireless charging base, compatible with 1838POCKET, 1838SW,1836AW, 1833XSW, 1833MW inspection lamps***

- Two charging positions with magnetic connection, for simultaneous use
- With pull-out support for wireless mobile phone charging
- Charging status LED indicator
- Max. input: 10W x2
- Input: AC 100-240V 50/60Hz
- Output: DC 12V 1.5A
  - DC 9V 2A
  - DC 5V 3A
- USB-C port
- IP20
- IK07

- **Can be hung on wall through:**
  3 strong magnets on back
  2 screw holes

Wireless charging Input 10W x2 | USB TYPE-C QC 3.0 USB-C | 101x190x28 mm | IP20

# THE RANGE OF REELS

Beta's wide, complete range of reels has been designed and developed to satisfy all professionals' requirements.
High-resistance spring ensuring remarkable durability and fluidity in use.
Shells made of thick polypropylene, for unique shock resistance.
Rack device causing automatic cable rewind to stop, easy to disable, to allow continuous traction.
Each reel is fitted with a 180° swivel wall-mount bracket and an additional bracket for quick connection and disconnection from the wall-mount support.

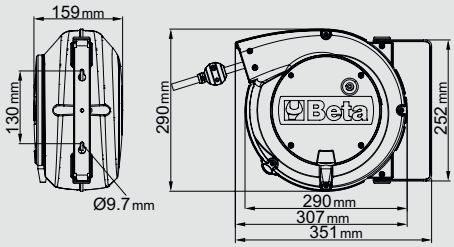


- **Length of cable out of shell: 1 m**
- **Rack mechanism can be disabled to keep cable in traction**
- **Coiled cable length: 15 m**

## 1842 15-H05/LED 018420821

**€ 353,00**

***Automatic cable reel with LED inspection lamp, 100-240Vac***

- With 230/12V safety transformer
- H05VV-F 2x1.0 mm² cable

## 1844 15-H05 018440315

**€ 230,00**

***Automatic cable reel, with 3Gx1.5 mm² cable***

- 3Gx1.5 mm² cable
- With thermal protection switch
- Max. power (rolled up): 1500W (230V-20°C)
- Max. power (unrolled): 2500W (230V-20°C)

## 1844 15-H05/SCK 018440316

**€ 240,00**

***Automatic cable reel, with 3Gx1.5 mm² cable and SCHUKO type socket and plug***

- 3Gx1.5 mm² cable
- With thermal protection switch
- Max. power (rolled up): 1500W (230V-20°C)
- Max. power (unrolled): 2500W (230V-20°C)

## 1845 15-H07 018450367

**€ 474,00**

***Automatic cable reel, with 3Gx2.5 mm² cable***

- 3Gx2.5 mm² cable
- With thermal protection switch
- Max. power (rolled up): 2000W (230V-20°C)
- Max. power (unrolled): 3000W (230V-20°C)

## 1273MQ/D6 012730851

**€ 73,00**

***Set of 6 screwdrivers***

1274MQ ◐ 3x100-4x100-5,5x125 mm
1272MQ ✪ PH0x60-PH1x80-PH2x100 mm

EN 60900

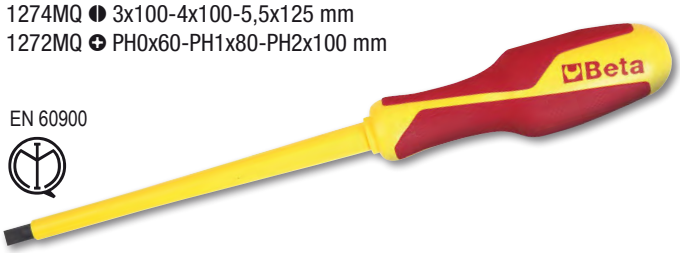

## 1273MQF/D6 012730606

**€ 93,50**

***Set of 6 slim screwdrivers***

1274MQ/F ◐ 0,5x3,5x100 - 0,8x4,5x100 - 1x5,5x125 - 1,2x6,5X150 mm
1272MQ/F ✪ PH1x4,5x80- PH2x6x100 mm

EN 60900

## 1169MQ/D2 011690152

**€ 105,50**

**NEW!**

***Assortment of insulated combination pliers and insulated diagonal cutting nippers***

EN 60900

**1082MQ** 160 mm

**1150MQ** 180 mm

1000 V

## 914MQ-A/S4 009140054

**€ 64,50**

***Set of hexagon hand sockets, 3/8" female drive***

Made from special polyamide-based technopolymers

3/8"

For use with torque wrench

| ⌀ mm | max (Nm) |
|---|---|
| 8 | 6 |
| 10 | 9 |
| 13 | 20 |
| 17 | 30 |

EN 60900

## 2001/BZ24 MQ 020010154

**€ 354,00**

***Folding tool case with assortment of 24 tools, for electricians***

380x290x60 mm

## 1128MQ 011280101

**€ 52,50**

***Electrician's scissors, stainless steel blades, with microteeth***

IEC 60900

| Quantity/Description | | Beta N. |
|---|---|---|
| 1 | electrician's scissors, straight blades | 1128BMX |
| 1 | combination pliers 1000V ⎓ 180 mm | 1150MQ |
| 5 | combination wrenches 8-10-13-17-19 mm | 42 |
| 3 | screwdrivers for headless slotted screws, 1000V ◐ 3x100 - 4x100 - 5,5x125 mm | 1274MQ |
| 3 | screwdrivers for cross head Phillips® screws, 1000V ✪ PH0x60 - PH1x80 - PH2x100 mm | 1272MQ |
| 9 | ball head offset hexagon key wrenches burnished ○ 1,5-2-2,5-3-4-5-6-8-10 mm | 96BP/SC9 |
| 1 | mains testing screwdriver ◐ | 1253 |
| 1 | diagonal cutting nippers 1000V ⌶ 160 mm | 1082MQ |

## 1760/OHM 017600025

**€ 872,00**

***Multimeter/megohmmeter for high voltage insulation testing TRUE RMS indicator***

CAT. IV 600V
CAT. III 1000V

| | Measuring range | Base accuracy |
|---|---|---|
| AC/DC voltage: | 50mV - 1000V | ±0.06% - ±0.1% rdg |
| AC/DC current: | 0.01µA - 10A | ±0.5% - ±1% rdg |
| Resistance: | 0.01Ω - 50MΩ | ±0.2% - ±2% rdg |
| Meg OHM: | 0.01 - 5000MΩ | ±4% rdg. max current 1mA |
| Capacity: | 5nF - 10mF | ±1.5% - ±3% rdg |
| Frequency: | 50Hz - 100 MHz | ±0.02% - ±0.1% rdg |
| Temperature: | -50 °C - +1350 °C | ±0.5% rdg |
| Diode test: | 3V dc | |
| Continuity test: | <30 Ω | |

## 2029EM 020290300

**€ 2.190,00**

**NEW!**

***Tool case with assortments of 43 maintenance and repair tools for hybrid and electric vehicles***

490x380x230 mm

| Quantity/Description | Beta N. |
|---|---|
| 13 single open end wrenches, 1000V 7-8-9-10-11-12-13-14-15-16-17-19-22 mm | 52MQ |
| 7 bi-hex sockets ○ 6-7-10-12-13-17-19 mm | 910MQ/B |
| 3 socket drivers for Torx® head screws ✪ TX25-TX30-TX40 | 910MQ/TX |
| 1 3/8" drive reversible ratchet | 910MQ/55 |
| 1 slip joint pliers, boxed joint 250 mm | 1048MQ |
| 1 diagonal cutting nippers 1000V ⊂ 160 mm | 1082MQ |
| 1 electrician's scissors 145 mm | 1128MQ |
| 1 combination pliers 1000V ═ 180 mm | 1150MQ |
| 1 extra long flat nose pliers ═ 160 mm | 1162MQ |
| 2 screwdrivers for cross head Phillips® screws, 1000V ✪ PH1 - PH2 | 1272MQ |
| 5 screwdrivers for headless slotted screws, 1000V ◐ 2,5x75 - 3x100 - 4x100 - 5,5x125- 6,5x150 mm | 1274MQ |
| 1 combination voltage and continuity tester | 1760PT |
| 1 cable stripping knife, insulated 190 mm | 1777MQ/U |
| 1 composite insulating gloves GM 10 | 1996MQ/GM |
| 2 aluminium warning signs A1 - A2 | 7109A |
| 2 prohibition signs D2 - D3 | 7109D |

## 2400 RSC24/6-VEM 024004016

**€ 6.190,00**

**NEW!**

***Mobile roller cab with 6 drawers and assortment of 81 repair and maintenance tools for hybrid and electric vehicles***

| Quantity/Description | Beta N. | TR |
|---|---|---|
| 1 insulating mat | 1995MQ/T | |
| 4 plastic posts with fillable bases | 7104 90 | |
| 1 multimeter/megohmmeter for high voltage insulation testing | 1760/OHM | |
| 1 combination voltage and continuity tester, 12-690V AC/DC | 1760PT | |
| 1 spare leads for digital multimeters and amperometric clamps | 1760DGT-R3 | |
| 1 composite insulating gloves | 1996MQ/GM | |
| 1 plastic barrier chain | 7105 6 | |
| 2 aluminium warning signs | 7109A | |
| 2 prohibition signs | 7109D | |
| 12 single open end wrenches, 1000V 7-8-10-11-12-13-14-15-16-17-19-22 mm | 52MQ | M49 |
| 12 single ring wrenches 7-8-10-11-12-13-14-15-16-17-19-22 mm | 89MQ | M49 |
| 4 socket drivers for hexagon screws ○ 4-5-6-8 mm | 910MQ/PE | M108 |
| 11 bi-hex sockets ○ 7-8-10-11-12-13-14-15-16-17-19 mm | 910MQ/B | M108 |
| 6 socket drivers for Torx® head screws ✪ T15-T20-T25-T27-T30-T40 | 910MQ/TX | M108 |
| 2 socket drivers with XZN® profile ○ 8-10 mm | 910MQ/XZN | M108 |
| 1 3/8" drive extension 125 mm | 910MQ/21 | M108 |
| 1 3/8" drive extension 250 mm | 910MQ/22 | M108 |
| 1 3/8" drive, T-handle | 910MQ/T | M108 |
| 1 3/8" drive reversible ratchet | 910MQ/55 | M108 |
| 1 electrician's scissors | 1128MQ | M161 |
| 1 slip joint pliers, boxed joint 250 mm | 1048MQ | M161 |
| 1 diagonal cutting nippers 1000V ⊂ 160 mm | 1082MQ | M161 |
| 1 combination pliers 1000V ═ 180 mm | 1150MQ | M161 |
| 1 extra long flat nose pliers ═ 160 mm | 1162MQ | M161 |
| 1 extra-long bent flat nose pliers ═ 160 mm | 1164MQ | M161 |
| 4 screwdrivers for cross head Phillips® screws, 1000V ✪ PH0x60 - PH1x80 - PH2x100 - PH3x150 mm | 1272MQ | M161 |
| 4 screwdrivers for headless slotted screws, 1000V ◐ 2,5x75 - 3x100 - 4x100 - 5,5x125 mm | 1274MQ | M161 |
| 1 cable stripping knife, insulated | 1777MQ/U | M161 |

# MULTIPURPOSE TOOL COMPLETE WITH BITS AND SHEATH

# 1778MT

**BETA's multipurpose tool stands out from similar commercially available tools with BETA's typical hallmarks: pliers synonymous with matchless quality, sophisticated materials and state-of-the-art technology. The 11 bits, which come in the most popular geometries in the market, make this item ideal for any work environments and conditions, e.g. camping, nautical industry, hunting and DIY.**

PRO WILD

## 1778MT 017780055

**€ 105,00**

***Multi-tools complete with bits and sheath***

**9 tools for a total of 22 functions:**
- Combination pliers
- Large blade
- Corrugated blade
- Hacksaw frame
- File
- Tin/Bottle opener
- Scissors
- Bit holder
- Screwdriver for cross head Phillips® screws

*SUITABLE FOR EVERY SITUATION!*

Easy pull-out of tools

Tool unlock buttons

11 bits + socket + tweezers

Ruler 100 mm + Ruler, 4"

*COMPACT AND VERSATILE!*

## 1103 950 011030090 € 163,50

***Flat hat bolt cutter for rod irons, bolts and electrowelded mesh for concrete reinforcement***

Cutting capacity:
- Ømax = 12 mm
- Ømax (HRC 48)= 6 mm

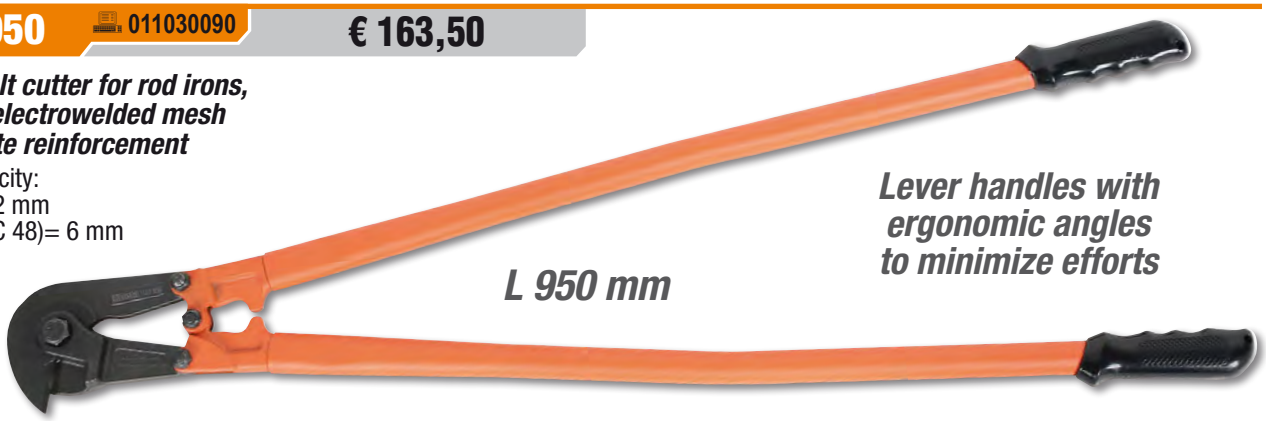

*L 950 mm*

*Lever handles with ergonomic angles to minimize efforts*

## 1726BM 017260050 € 49,00

***Hacksaw frame with quick release bladeattachment system***

## 1128FX 011280090 € 34,50

***Electrician's scissors, straight stainless steel blades, with microteeth, cable cutting groove and crimping pliers for tube terminals***

- Articulated belt hook case
- Bimaterial handles
- Anti-loose pin

## 1128BAX 011280088 € 35,50

***Double-acting electricians' scissors, with milling profiles in DLC-coated stainless steel***

- High blade surface hardness (resistance to abrasion and wear)
- Low coefficient of friction (smoothness and anti-adherence)
- With articulated plastic case

***+HARDNESS -COEFFICIENT OF FRICTION***

**Profile and mill:** designed to enlarge holes on plastic, from 13 to 25 mm.

DLC DIAMOND LIKE CARBON

## 1778BS 017780035 NEW!

€ 37,00

***Foldaway knife with serrated blade,*** *in wallet*

- Stainless steel serrated blade
- Carbon look finish
- Double safety blade lock
- Lightweight fibreglass handle
- Complete with hole for locking/unlocking shackles for nautical applications
- With clip and fabric wallet with loop

## 1778SOS 017780080

€ 35,00

***Car service knife with window breaking hammer and seat belt cutter features,*** *in case*

- With clip and fabric wallet with loop
- Anodized aluminium handle
- Safety blade lock

## 1772M 017720040

€ 19,80

***Safety utility knife with retractable blade, supplied with 3 blades***

- Blade retracts through an automatic spring mechanism
- Die-cast alloy body
- Staple remover built into handle

***ADJUSTABLE CUTTING DEPTH Ø÷25 mm***

## 1771 017710000

€ 9,95

***Utility knife, 18 mm, supplied with 3 blades***

## 1773S 017730100 NEW!

€ 9,00

***Safety utility knife with round blade***

- Main blade Ø 28 mm
- Secondary blade for cutting films
- Hanging hook

## 1972/K12V-10 019720112 € 263,00 NEW!

2,3 kg

316x254x96 mm

***Ultracompact drill, 12V***

**Ultracompact**: no more than 170 mm in length;
**Ultralightweight:** no more than 1.1 kg, with battery, and **perfectly balanced**

**Features:**
- Double mechanical speed with steel gears and 20-position clutch
- Torque up to 30 Nm and 1300 rpm (400 rpm in 1st gear); drills diameters up to 10 mm in steel and 20 mm in wood
- 2Ah batteries and charge indicator on drill body
- Ergonomic nonslip handle
- Front LED
- 10-mm self-locking chuck
- Belt clip (right/left side)
- Selector switch, screwing-unscrewing-locking modes (for transportation)
- **Supplied in a hard case with 2 lithium ion batteries (2 Ah) and quick charger (50 min)**

## 1982/K12V 019820112 € 263,00 NEW!

2,3 kg

316x254x96 mm

***Reversible impact wrench, 12V,***
ideal for jobs in small areas, provides high torque (80 Nm), one-handed operation

**Ultracompact:** no more than 160 mm in length;
**Ultralightweight:** no more than 1 kg, with battery, and **perfectly balanced**
**Features:**
- 1/4" hexagon drive with locknut
- Belt clip (right/left side)
- Front LED
- Selector switch, screwing-unscrewing-locking modes (for transportation)
- Ergonomic nonslip handle
- Gearcase made entirely of metal
- 2Ah batteries with charge indicator on impact wrench body
- **Supplied in a hard case with 2 lithium ion batteries (2 Ah) and quick charger (50 min)**

## 1972/K12V-COMBO 019720010 € 447,00 NEW!

3 kg

310x295x100 mm

***12V kit of ultracompact drill + 1/4" HEX reversible impact wrench***

Case contents:
- 1x12V ultracompact drill, with 10-mm autochuck
- 1x12V reversible impact wrench, with 1/4" hexagon drive
- 2x2Ah lithium ion batteries
- 1 quick battery charger

# THE RANGE OF BETA-BRANDED ANGLE GRINDERS

**Power, Reliability and Durability** are the three hallmarks of the new range, with the focus also being on maximum safety and ease of use for professionals.

- **Outstanding performance:**
  - Powerful, resin-bonded, wear-resistant, durable motor
  - Air vents providing optimal cooling, protected against dust infiltration
- **Unparalleled safety for operators:**
  - Spindle lock device for quick disc changes
  - Protection against accidental activation
  - Smooth start, for limiting large initial inrush of current on start-up
- **Unique comfort and ease of handling:**
  - Nonslip ergonomic handle for improved grip
  - Lowered head that allows working in confined spaces
  - Tangle-free cable no less than 4 metres in length for increased ease of movement
  - Additional handle that can be mounted on both sides

**Available for discs 115/125/230 mm in diameter, rated absorbed power ranging from 750 W to 2400 W.**

## 1956 115-750W 019560011 € 81,50

### *Angle grinder for discs Ø 115 mm*

Ideal for cutting, grinding and roughing jobs
**Powerful motor (750 W)**

- Nonslip ergonomic handle for increased comfort and safety
- Lowered head that allows working in confined spaces
- Extremely lightweight **(weighs no more than 1.8 kg)**
- Tool-less disc cover (quick release)
- Additional handle that can be mounted on both sides

*4 m*

**750W**

Technical data
- Absorbed power: 750 W
- Voltage: 220-240 V / 50 Hz
- Disc diameter (disc not included): 115 mm
- Free speed: 11,000 rpm
- Tool spindle thread: M14
- Tangle-free cable length: 4 m
- Weight: 1.8 kg

## 1956 125-1400W 019560125 € 158,00

### *Angle grinder for discs Ø 125 mm*

Ideal for cutting, grinding and roughing jobs
**Powerful motor (1400 W) - Variable speed**

- Nonslip ergonomic handle for increased comfort and safety
- Lowered head that allows working in confined spaces
- Tool-less disc cover (quick release)
- Additional anti-vibration handle that can be mounted on both sides

VARIABLE SPEED

*4 m*

**1400W**

Technical data
- Absorbed power: 1400 W
- Voltage: 220-240 V / 50 Hz
- Disc diameter (not included): 125/115 mm
- Free speed: 3,000 - 10,000 rpm
- Tool spindle thread: M14
- Tangle-free cable length: 4 m
- Weight: 2.5 kg

## 1956 230-2400W 019560230 € 213,00

### *Angle grinder for discs Ø 230 mm*

- Ideal for complex shearing, grinding and filing jobs
- **Powerful motor (2400 W)**
- Nonslip ergonomic handle for increased comfort and safety
- **Soft-start function** for a smooth start and limiting large initial inrush of current on start-up anti-vibration
- Spindle lock device for quick disc changes

*4 m*

**2400W**

Technical data
- Absorbed power: 2400 W
- Voltage: 220-240 V / 50 Hz
- Disc diameter (not included): 230 mm
- Free speed: 6,500 rpm
- Tool spindle thread: M14
- Tangle-free cable: 4 m
- Weight: 5.8 kg

# SPECIAL PROMOTION

## Purchase 250 cutting discs, Ø 125 mm, and you will get a grinder for free

## Beta 1956 125-1400W

### *Angle grinder*

- Powerful motor (1400W) - **Variable speed**
- Nonslip ergonomic handle for increased comfort and safety
- Lowered head that allows working in confined spaces

### *Main features*

- Protection against accidental activation
- Additional anti-vibration handle that can be mounted on both sides
- Tool-less disc cover (quick release)
- Spindle lock device for quick disc changes
- Lock-on/off slide switch
- Air vents protected against dust infiltration and providing optimal cooling performance
- Service wrench included

### *Technical data*

- Absorbed power: 1400 W
- Voltage: 220-240 V / 50 Hz
- Disc diameter (not included): 125/115 mm
- Free speed: 3,000 - 10,000 rpm
- Tool spindle thread: M14
- Tangle-free cable length: 4 m
- Weight: 2.5 kg

+

TOP LINE

### 11035

***Abrasive steel and stainless steel cutting discs, thin, with flat centre***

- Ultra-high performance discs
- For universal use for cutting stainless steel, alloy steel, and treated/untreated steel
- High material removal combined with low disc wear
- Minimum heating of disc being worked
- Reduced burr production
- Reduced power absorption of electric tool
- Powerful electric tools should be used

### 11035 1,0/SM-EXP

| Diameter x Thickness | N° pieces | Package Code | € |
|---|---|---|---|
| 125 x 1,0 | 250 | 110350925 | € 818,00 |

### 11035 1,6/SM-EXP NEW!

| Diameter x Thickness | N° pieces | Package Code | € |
|---|---|---|---|
| 125 x 1,6 | 250 | 110350926 | € 818,00 |

## 11001

***Abrasive steel cutting discs,*** *with depressed centre*

A30S




| Ø mm | S mm | F mm | | € |
|---|---|---|---|---|
| 115 | 3,2 | 22,23 | 110010118 | € 1,87 |
| 230 | 3,2 | 22,23 | 110010233 | € 4,30 |

## 11011

***Abrasive steel grinding discs,*** *with depressed centre*

A24N




| Ø mm | S mm | F mm | | € |
|---|---|---|---|---|
| 115 | 6,5 | 22,23 | 110110115 | € 2,53 |
| 125 | 6,5 | 22,23 | 110110125 | € 2,75 |
| 230 | 6,5 | 22,23 | 110110230 | € 7,90 |

## 11045-11049

***Abrasive steel and stainless steel cutting discs, thin,*** *with flat centre*

PREMIUM LINE




| | | Ø mm | S mm | F mm | | € |
|---|---|---|---|---|---|---|
| 11045 | A46Q | 115 | 1,0 | 22,23 | 110450010 | € 1,87 |
| 11045 | A46Q | 115 | 1,6 | 22,23 | 110450016 | € 1,87 |
| 11046 | A46Q | 125 | 1,0 | 22,23 | 110460010 | € 1,98 |
| 11046 | A46Q | 125 | 1,6 | 22,23 | 110460016 | € 1,98 |
| 11049 | A36Q | 230 | 2,0 | 22,23 | 110490019 | € 3,85 |

## 11034-11038

***Abrasive steel and stainless steel cutting discs, thin,*** *with flat centre*

Ultra-high performance discs
For universal use for cutting stainless steel, alloy steel, and treated/untreated steel
Powerful electric tools should be used

A46U

TOP LINE

| | Ø mm | S mm | F mm | | € |
|---|---|---|---|---|---|
| 11034 | 115 | 1,0 | 22,23 | 110340022 | € 2,42 |
| 11034 | 115 | 1,6 | 22,23 | 110340062 | € 2,42 |
| 11035 | 125 | 1,0 | 22,23 | 110350022 | € 2,64 |
| 11035 | 125 | 1,6 | 22,23 | 110350062 | € 2,64 |
| 11038 | 230 | 2,0 | 22,23 | 110380022 | € 4,95 |

## 1898 40

018980040

**€ 4.260,00**

### *Eco friendly, heated manual cleaning tank*

- Using the bio-active liquid included, oil and residue can be effectively removed from mechanical parts without the need for aggressive chemicals
- The bio-active liquid converts the oil and other residue into carbon dioxide and water which can be re-used again and again
- No need for specialist waste collection and disposal
- Suitable for both metal and plastic parts

**EQUIPMENT:**
- Long bristle brush and connecting pipe
- Right-hand and left-hand operation function
- Perforated stainless steel grid
- Wheels with brakes
- Card with display operating temperature and low level alert

| | |
|---|---|
| Max. pump capacity | 10 l/min |
| Tank capacity | 40 l |
| Operating temperature | +5°C ÷ +40°C |
| Weight | 50 kg (when empty) |
| Internal dimensions | 710x370x200 mm |

***NO DISPOSAL OF FLUIDS!***

100% eco friendly

***EFFECTIVE AND ENVIRONMENTALLY FRIENDLY***

## 1895

### *Ultrasonic cleaning tank*
*with special degas function*

- Ultrasonic cleaning relies on fluid heating to effectively clean spare parts and metal pieces in general (carburettors, valves etc.)
- Digital display for temperature and cleaning time selection
- Two cleaning modes: “soft” and “normal”
- For normal cleaning, just use water at a temperature of 50/60 °C
- For more accurate cleaning, add non-foaming detergent solutions specific for ultrasonic tanks
- Using the degas mode speeds up air release throughout the tank, thereby improving ultrasonic cleaning efficiency

| | 1895 6 | 1895 13 | 1895 27 |
|---|---|---|---|
| Tank capacity | 6 l | 13 l | 27 l |
| Drain tap | ✔ | ✔ | ✔ |
| Power | 150 Watt | 300 Watt | 500 Watt |
| Heating power | 300 Watt | 400 Watt | 500 Watt |
| Temperature range | 0÷80°C | 0÷80°C | 0÷80°C |
| Cleaning time range | 0-99 minutes | 0-99 minutes | 0-99 minutes |
| Frequency | 40 kHz | 40 kHz | 40 kHz |
| Power supply | 220/230V | 220/230V | 220/230V |
| Dimensions | 330x180x310 mm | 350x325x320 mm | 530x330x380 mm |
| Tank size | 300x155x150 mm | 325x235x145 mm | 500x300x200 mm |

**1895 6** 018950060 *6 l*

**€ 760,00**

**1895 13** 018950130 *13 l*

**€ 1.178,00**

**1895 27** 018950270 *27 l*

**€ 1.640,00**

## 1498/8A 014980108 € 236,00

### *Electronic car / commercial vehicle battery charger, 12 V*

- Protected against polarity reversal and short circuits
- Digital backlit display
- Pull-back fixing hook

IP65 Pb Wet, Gel Dry, Agm

| | |
|---|---|
| Power supply voltage | 220V-240V |
| Frequency | 50-60 Hz |
| Rated current (Min-Max) | 2-8 Amp |
| Battery voltage | 12V |
| Battery capacity | 5Ah-160Ah |
| Degree of protection | IP65 |
| Battery type | Wet-Gel-Dry-AGM |

### *Electronic multipurpose battery charger, 12-24V*

- Backlit graphic display
- Charging and maintenance
- Protected against polarity reversal, short circuits
- 9 charging stages
- Floating system
- Battery recovery function
- Clamp holder
- Reclining fixing hook
- Supplied accessories: cable with clamp

Pb Wet, Gel Dry, Agm
LiFePO4 LITHIUM

## 1498/16A 014980126 € 496,00

- Max. charging current: 16A, continuous
- SHOW ROOM function (13.8V - 12A)
- SUPPLY function (14V - 12A)
- Memory saving function (13.8V - 12A)

## 1498/25A 014980125 € 584,00

- Maximum continuous charging current: 25A
- SHOW ROOM function (13,8V - 21A)
- SUPPLY function (14V - 21A)
- Memory saving function (13.8V - 21A)

| | 1498/16A | 1498/25A |
|---|---|---|
| Power supply | 220-240V | 220-240V |
| Power | 240W | 390W |
| Charging current | 4-16A | 5-25A |
| Battery type | Agm - Wet - Lithium (LiFePo4) | Agm - Wet - Lithium (LiFePo4) |
| Charging capacity | 5-360Ah | 5-550Ah |
| Maintenance capacity | 5-550Ah | 5-800Ah |
| Output voltage | 12-24V | 12-24V |
| Minimum battery voltage | 0,8V | 0,8V |
| Protection degree | IP20 | IP20 |
| Dimensions | 260x130x75 mm | 260x130x75 mm |

## 1760DGT 017600005 € 285,00

### *Digital automotive multimeter*

**Technical Data:**

- **RPM (tachometer):**
  For 2 and 4 cylinder engines
  RPM4 600 - 4000 RPM
  RPM4 600 - 12000 RPM (x10 RPM)
  RPM2/DIS 300 - 4000 RPM
  RPM2/DIS 300 - 6000 RPM (x10 RPM)
- **Dwell angle:** 4-8 CYL
- **DC voltage:** 400mV-4/40/400/1000V
- **AC voltage:** 4/40/400/700V
- **DC current:** 40/400mA-4/20A
- **AC current:** 40/400mA-4/20A
- **Resistance:** 400Ω-4/40/400kΩ-4/40MΩ
- **Capacity:** 40/400nF-4/40/100μF
- **Frequency:** 5/50/500Hz-50/500-10MHz
- **Duty cycle:** 0.1 % - 99.9%
- **Pulse amplitude:** 1 - 10ms

- **Diode test:** Test current 0.3mA
- **Continuity:** <150Ω - Test current <0.3mA
- **Display:** High-contrast, backlit 4-digit LCD
- **Overvoltage:** Category II 1000V
- **Auto power off:** 30 minutes
- **Power supply:** 1 9V battery (included)
- Inductive clamp (included)
- 2 tips (included)
- Soft cloth case (included)
- Operating manual

## 1497BS 014970190 € 24,60

***Relay and fuse removal pliers, straight, thin pattern***

The long, extremely thin noses allow the relay and fuse to be removed from small areas

| L mm | L1 mm | A mm |
|---|---|---|
| 230 | 45 | 14 |



## 1497SS 014970195 € 22,40

***Self-locking pliers for soldering tinned wires***

- Upper clips allow soldering wires to clamped and brought close to each other.
- Built-in rack allows wires to be placed in 6 different positions

| L mm | A Max mm |
|---|---|
| 245 | 14÷70 |



## 1497/C23 014970200 € 239,00

***Assortment of 23 tools for releasing electrical connectors***

440x250x70 mm

## 1760/IR500 017600350

## € 169,50

***Digital infrared thermometer with dual laser aiming system***

TECHNICAL DATA
Temperature range: -50 ÷ 500 °C (-22 ÷ +932 °F)
Display resolution: 0.1 °C (0,1 °F)
Emissivity: 0.1 ÷ 1 adjustable
Accuracy: -50 °C ÷ +20 °C (+/- 3 °C);
20 ÷ 500 °C (+/-2% or 2 °C)
Optical resolution (D:S): 12:1
Auto power off: ca. 10 seconds
Operating temperature: 0 °C ÷ 50 °C
Storage temperature: -20 °C ÷ 60 °C
Power supply: 1 9V battery

## 1497/C94 014970300 € 421,00

***Assortment of 94 car testing connectors***
*For use with main diagnostic tools*

Assortment contents:
- 2 t-taps
- 2 potentiometers
- 2 warning lights
- 2 SRS connectors
- 2 alligator clips
- 2 acicular probes
- 2 prods
- 2 dual banana connectors
- 4 single banana connectors
- 24 flat male terminals 0.6÷6 mm
- 12 round male terminals 1.6÷3.9 mm
- 24 flat female terminals 0.6÷6 mm
- 12 round female terminals 1.6÷3.9 mm

430x390x100 mm

## 1760PA/AC-DC2000 017600003

**€ 694,00**

***Amperometric clamp with digital multimeter and data connection***

MEASURABLE PARAMETERS:
- DC voltage: 0.1mV ÷ 1000V
- AC voltage: 0.1mV ÷ 1000V
- AC current: 0.01A ÷ 2000A
- DC current: 0.01A ÷ 2000A
- Resistance: 0.1Ω ÷ 60MΩ
- Capacity: 1nF ÷ 6000 µF
- Frequency: 10kHz ÷ 20kHz
- Temperature: -20 °C ÷ 1000 °C -4 °F ÷ 1832 °F
- Power supply: 3 1.5V batteries, type AA (included)
- Data connection (version 4.0)

380x280x100 mm

**2000A**

## 1760PA/AC-DC 017600000

**€ 352,00**

***Amperometric clamp and digital multimeter***

SPECIFICATIONS
DC voltage: 0.1mV ÷ 600V
AC voltage: 0.1mV ÷ 600V
AC current: 0.01A ÷ 1000A
DC current: 0.01A ÷ 1000A
Resistance: 0.1Ω ÷ 40MΩ
Capacity: 0.001nF ÷ 40 µF
Frequency: 0.001kHz ÷ 4kHz
Temperature: -40°C ÷ 1000 °C
-40°F ÷ 1832°F

**1000A**

## 1498BC/12 014980040

**€ 350,00**

***Multipurpose portable starter, 12V***

- Device protecting against polarity reversal, short-circuit, overcurrent, overcharge and overheating

**Supplied with:**
- Protective case
- Cable with starting clamps
- USB ports for charging electronic devices
- LED battery charge indicator
- USB and USB-C cable
- Mains power supply
- Multifunction LED torch

**1500A**

| | |
|---|---|
| Starting current | 600A |
| Pickup current | 1500A |
| Battery type | 4 cells LifePo4 |
| Battery capacity | 25000mAh |

## 1498/12 014980480

**€ 745,00**

***Portable car starter, 12V***

- Pickup current: 2200 A
- Sealed lead acid battery, solid electrolyte (AGM) type

## 1498/24 014980490

**€ 1.500,00**

***Portable car and commercial vehicle starter, 12-24V***

- Pickup current: 4200 A (12V), 2100 A (24V)
- Sealed lead acid battery, solid electrolyte (AGM) type

genesis EP PURELEAD

## *Portable high-performance starter, ultralightweight*

The microprocessor provides total protection against:
- polarity reversal
- short circuits
- incorrect voltage
- overloads
- underdischarge
- overcharge
- overtemperature

## 1498LT/12 — 014980012

**€ 891,00**

- **Weighs no more than 2.5 kg**
- Cable length 500 mm
- Operating voltage 12V 1,3A

## 1498LT/12-24 — 014980014

**€ 1.770,00**

- **Up to 10,000A in 5 kg weight**
- Cable length 160 cm
- Cable section 25mm²
- Automatic power supply 4 Amp

| | 1498LT/12 | 1498LT/12-24 |
|---|---|---|
| Operating voltage | 12V | 12/24V |
| Continuous amperage | 800A | 2000/1000 A |
| Maximum starting amperage | 2000A | 5000/2500 A |
| Peak amperage | 4000A | 10000/5000 A |
| Clamp amperage | 1000 A | 1000 A |
| Cable length | 500 mm | 1600 mm |
| Battery type | 4 cells LifePo4 | 4 cells LifePo4 |
| Memory saving function | Yes | Yes |
| Dimensions | 260x135x72 mm | 350x240x140 mm |

## 1498TB/12-24 — 014980401 — € 714,00

### *Digital battery tester, 12V, and starting/ charging system analyzer, 12-24V*

Allows the following to be tested: battery, alternator (smart and normal) and starter, diode ripple and chassis test
- fitted with software for printing test from PC
- compact, shockproof frame
- complete with input for connecting a removable mini printer (optional accessory, Beta 1498ST/TB)

435x320x100 mm

| | |
|---|---|
| Applications | - 12V battery test<br>- Alternator charge test, 12-24V<br>- Starter test |
| Operating range | 100-2000 CCA |
| Reference standards | CCA,SAE,DIN,EN,IEC,JIS |
| Supported batteries | PB, WET, GEL, AGM, AGM FLAT, EFB |
| Voltmeter | 9V-36V |
| Cable length | 1600 mm |
| Languages | Italian, English, French, German, Spanish, Polish, Romanian, Dutch, Swedish and Finnish |
| Accessories included | USB cable and software |

## 960AD/TP2 009600510

**€ 554,00**

***Set of adaptors for item 960TP***
*in plastic case*

Contents:
- Dummy injectors
- Dummy glow plugs
- Spark plug adaptors
- Oil cap adaptors
- Petrol injection couplers
- Set of spare gaskets

430x310x50 mm

## 1464IC-RK 014640377

**€ 202,50**

***Universal dummy injector kit for cars, trucks, marine engines and agricultural machines***

Supplied with art. 1464IC

## 1464CBD 014640300

**€ 763,00**

***Comprehensive adapter set for testing compression in petrol and diesel engines, with tester 1464T***

Makes it possible to connect to engine to test petrol and diesel compression with tester 1464T

Contents:
- 8 dummy spark plugs with non-return valves
- 44 dummy glow plugs with non-return valves
- 1 adjustable universal dummy injector for cars, trucks, marine engines and agricultural machines
- 1 90° adapter, pressure release valve and connecting pipe
- Space accommodating tester 1464T in case

510x410x140 mm

## 1464FG 014640470

**€ 326,00**

***Set of dummy regulators for testing diesel common rail system (for use with Beta 1464T-1464AP)***

Used with the tester and suitable adapters, it makes it possible to determine whether the problem is the high pressure pump or the regulator when there is no pressure in the high pressure circuit in common rail engines.
Recommended for Bosch, Delphi, Denso and Siemens pressure regulators

350x250x80 mm

## 1464APB 014640500

**€ 415,00**

***Set for testing high pressure system in FSI petrol engines, for use with item 1464T***

Comes with 200 bar sensor and connectors

240x210x50 mm

## 1464T 014640050

**€ 935,00**

***Digital pressure and compression tester***
- 5” touch screen display
- rechargeable polymer lithium battery
- complete with 80 bar sensor (for low pressure) and USB cable

## 1464AP 014640450

**€ 844,00**

***Set for testing high pressure system in common rail diesel engines, with item 1464T***
- High pressure pipe set
- Fittings
- 2,000 bar sensor

430x310x50 mm

## 1464PT 014640550

**€ 181,50**

***Set for testing turbo pressure, for use with item 1464T***

Comes with sensor
and connecting cable

240x210x50 mm

## 1464VD 014640570

**€ 206,00**

***Vacuum testing set for item 1464T***

For measuring and storing
maximum vacuum value
Supplied with:
- 800 mbar sensor
- 6 and 8 mm adaptors
- 3-m-long RJ45 cable

TECHNICAL DATA
- Vacuum test: 0÷800 mbar
- Resolution: 1 mbar

240x210x50 mm

## 1464TDI 014640600

**€ 130,00**

***Set for testing pump pressure in TDI engines, for use with item 1464T***

Comes with connector

240x210x50 mm

## 1464FAP 014640610

**€ 206,00**

***Set for testing high pressure system in common rail diesel engines, with item 1464T***

Supplied with:
- 500 mbar sensor
- 8 mm adaptor with quick coupling and T fitting
- 3-m-long RJ45 cable

TECHNICAL DATA
- Vacuum test: 0÷500 mbar
- Resolution: 1 mbar

240x210x50 mm

## 1464ADB 014640620

**€ 96,00**

***Set for testing AdBlue® system pressure for item 1464T***

Supplied with adaptors for use
with 80-bar standard sensor
supplied with item 1464T

240x210x50 mm

## 1464PF 014640650

**€ 744,00**

***Set for testing pressure in braking system, for use with item 1464T***

Comes with adapters
and connectors

400x280x60 mm

## 1464PB 014640700

**€ 578,00**

***Set of 9 connectors for testing fuel low pressure (for use with item 1464T)***

Quick connectors to tester 1464T
allow fuel low pressure in diesel
and petrol engines to be quickly
checked

520x440x120 mm

## 1899SI 018990030 € 4.960,00

### *2-in-1 machine for cleaning injectors and intake manifold*

Special detergents can be used to periodically clean the injectors and the intake manifold in diesel and petrol engines, removing carbonaceous deposits and combustion residues

**Specifications:**
- Operating voltage: 12 V
- 2 service hoses with quick couplers
- 2 tanks (capacity: 1 l each)

## 1899A/M 018990011 € 1.415,00

### *DPF/FAP® system cleaning machine*

**Supplied with:**
- 1 2-m-long feed pipe
- 1 quick coupler + hose nozzle for differential sensor hoses
- 1 niplex M18x1.5 with hose nozzle for direct connection to lambda probe
- 1 extension hose
- 1 DPF/FAP® spray nozzle
- 1 magnetic pipe support
- 1 DPF/FAP® pipe with adjustment cable gland plus niplex M14/16/18 mm for connecting lambda probes

**Technical specifications:**
- operating voltage: 12 V
- power supply cord length: 3.9 m
- tank capacity: 1 l

Special detergents can be used to periodically clean and restore DPF and FAP® systems damaged by soot and ash deposits.
Results can be checked by self-diagnosis, which allows soot mass and differential pressure in diesel particulate filter before and after treatment to be determined.

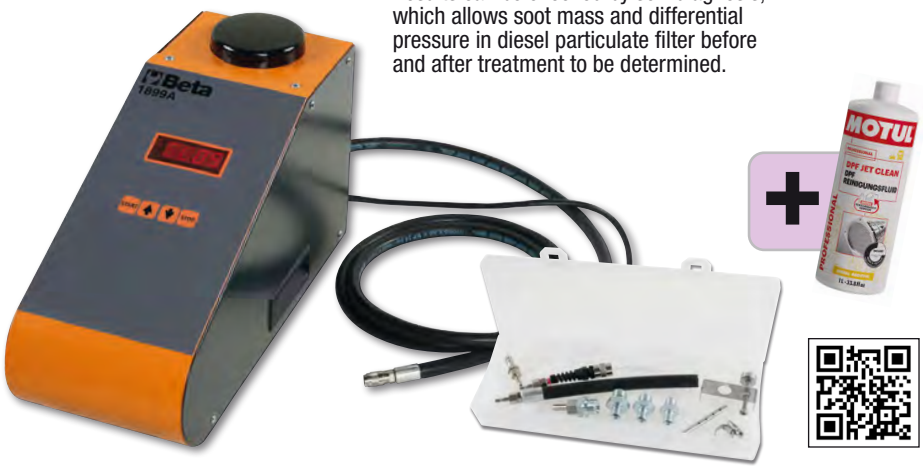


## *Multi-purpose trolley*

**Can be used as a mobile workstation for diagnostic tools, laptops, testers and battery chargers**
- Painted sheet metal frame: unparalleled firmness and sturdiness
- Ergonomic handle
- 2 fixed rear castors Ø 160 mm
- 2 steering front castors Ø 125 mm (one with brake)

**CA49-G** 049000112
**€ 921,00**
***Multi-purpose trolley with door,*** *empty*

**CX49-G** 049000102
**€ 820,00**
***Multi-purpose trolley,*** *empty*

2-level top

2 central shelves with adjustable position and 1 fixed low shelf

Pull-out drawer for housing a mini keyboard

1 paper holder

4 useful side cable reels made of plastic

2 useful side containers



CX49-G

## CB52-0 052000201 € 791,00

***Gearbox/transmission trolley with liquid recovery system***

Inclined plane and drain holes allow liquids to be recovered in collection tank

Fitted with:
- 4 swivel castors, including 2 with brakes
- tool drawer
- pull-out liquid collection tank; capacity: 7 l
- 2 shelves

***CAPACITY 7 L***

## 1877 018770008 € 749,00

***Exhausted oil drain unit, wheeled, with 90 l tank***

- Level indicator
- Big diameter pan with breakwater grate; capacity: 12 l
- Pneumatic tank emptying through 1.8 m pipe
- Tool tray

## 1877P 018770180 NEW! € 456,00

***Exhausted oil drain unit, wheeled, with polyethylene tank***

- Tank capacity: 40 l
- Large oil pan made of PP
- Level indicator
- Pneumatic drum emptying

## 1877F 018770100 € 102,00

***Exhausted oil drain unit for 1 l bottles***

- Fits up to 4 bottles at a time
- Supplied with 2 2-l jerrycans

***FITS UP TO 4 BOTTLES AT A TIME***

## 1482SN 014820110 € 63,50

***Quick coupler swivel pliers for fuel pipes, with articulated jaws***

| L mm |
|---|
| 260 |

## 1758RD 017580070 NEW!

**€ 119,00**

***Coolant funnel with quick couplings***

Funnel capacity: 1600 ml
with non-return valve,
to avoid air bubble formation

Included accessories:
- 4 extension units for small spaces
- 4 quick couplings for coolant tank
- 3 rubber reduction units

## 1758S 017580080 NEW!

**€ 89,00**

***Wall-mounted support for funnels 1758 and quick couplings***

Fitted with a drip tray, extremely convenient
for replacing funnels and couplings after use

## 1758B-1,6 017580033

**€ 43,00**

***Non-return funnel, 1600 ml, with quick couplings***

Quick couplings
for VAG group vehicles

## 1758B 017580030

**€ 38,50**

***Non-return funnel with quick couplings***

Particularly suitable
for VAG cars

***NON-RETURN***

## 1758B-RNT 017580035

**€ 27,50**

***Non-return quick coupling for funnel item 1758B and 1758B-1,6***

For Renault 1.5 dCi engine

Using these adapters with funnel 1758B allows oil to be effortlessly poured into any engines with reflux problems, without risking dirtying the engine compartment.

## 1758B/K5 017580040

**€ 109,50**

***Kit of non-return quick coupling adapters, for funnel 1758B and 1758B-1,6***

Kit contents:
- 1 adapter for 1.5 dCi Renault, Dacia, Nissan engines
- 1 adapter for 1.5/1.6 dCi Renault, Dacia, Nissan engines
- 1 adapter for 3.0 BMW diesel engines
- 1 adapter for 1.5/2.0 petrol engines, VAG group
- 1 connecting adapter for funnel, with tap

## 1494T/C5 014940350

**€ 78,00**

***Set of special sockets for plastic oil drain plugs***

Set contents:
- 1 socket for VAG group oil drain plugs
- 1 socket for BMW oil drain plugs
- 1 socket for PSA and Ford group oil drain plugs
- 1 socket for Mercedes oil drain plugs
- 1 "T"-handle wrench

3/8"

17 mm

173x125x50 mm

## 1758ADB-D 017580050

**€ 37,00**

***Non-return funnel for AdBlue®, with straight coupling***

## 1758ADB-45° 017580060

**€ 39,50**

***Non-return funnel for AdBlue®, with 45° coupling***

***MAXIMUM CAPACITY 1 L***

## 1759HD/3 017590063

**€ 608,00**

***Cooling system seal testing and circuit filling tools***

Make it possible to check circuit (pipes, joints, pumps, radiators) for leaks under pressure and quickly fill circuit, avoiding air bubble formation

600x500x140 mm

## 960KPC 009600780

**€ 334,00**

***Reversible impulse extractor with adjustable torque for glow plugs***

- Pneumatic extractor with adjustable torque and special sockets allow jammed glow plugs to be unscrewed, thereby minimizing damage risk
- 5 1/4" impact sockets, long series, specially designed for glow plugs: 8-9-10-11-12 mm, 2 extensions and 1 articulated joint
- 4 adjustable driving torques: 10-20-30-40 Nm
- Right-hand and left-hand adjustment

CE

420x185x60 mm

## 1759LR 017590070

**€ 467,00**

***Cooling system washing tool***

**Based on the use of compressed air, high water pressure allows for effective cleaning system washing**

- Supplied with 6 system connection adapters
- Operating lever with position locking for continuous use
- Supplied with a water quick coupling

2,6 kg

390x330x100 mm

## 960KC-M8/M9/M10 009600801

**€ 464,00**

***Assortment of tools for removing broken or damaged glow plugs***

***FOR SPARK PLUGS WITH THREADS M8-M9-M10***

380x290x50 mm

## 1949R 019490050

**€ 72,50**

***Socket for opening AdBlue® caps, for PSA group vehicles***

The 5 holes that are perpendicular to the handle allow dirt to be removed from radiators.

| mm | L mm |
|---|---|
| 6 | 600 |

## 960VTC 009600261

**€ 295,00**

***Leakage tester for petrol engine cylinders***

After compressed air has been introduced into cylinder, gauge will allow it to be tested for compression leaks

Supplied couplers:
M10 - M12 - M14 - M14, long

2,3 kg

373x295x71 mm

## 960PI/K36 009600218 NEW!

1/4

**€ 202,00**

***Kit of brushes for cleaning injector seats***

Kit contents:
- 12 nylon brushes, 8÷19 mm (1 mm interval)
- 12 steel brushes, 8÷19 mm (1 mm interval)
- 12 brass brushes, 8÷19 mm (1 mm interval)
- 1 bit holder with quick coupling and magnetic bottom
- 1 extension with quick coupling and magnetic bottom

1,2 kg

350x255x74 mm

## 1462/KI 014620235

**€ 2.660,00**

***Assortment of common rail diesel injector pullers***

Allows DELPHI-BOSCH-SIEMENS-DENSO injectors to be removed

- Mechanical and hydraulic operation
- Includes one 12-t hydraulic jack
- Can be directly used on vehicle with mounted engine
- Numerous adjustment options on head make it possible to work on most engines available



530x470x140 mm

## 960ER 009600726 € 64,50

***Slide hammer for injector washers***

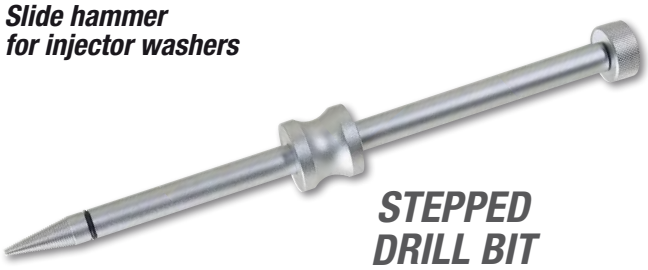


## 1454P 014540010 € 45,00

***Scraper for removing packing and sealant residues***

Particularly recommended for cleaning heads and flat surfaces to match

| S mm | L mm | L1 mm |
|---|---|---|
| 3,3 | 210 | 32 |

## 1884 018840010 € 513,00

***Oil filler tool for manual and automatic gearboxes and differentials***

Complete with 12 adaptors for direct connection
- Fitted with nonreturn valve for leakage-free oil filling
- Delivery: 70 cc per pump shot
- Tank capacity: 7.5 l
- Maximum permissible oil viscosity: SAE 140

**12 ADAPTORS**

| | |
|---|---|
| FORD | AT-101 |
| UNIVERSAL (Bmw, Honda, Nissan...) | AT-102 |
| VW-AUDI | AT-103 |
| VW-AUDI-PORSCHE | AT-104 |
| VW-AUDI-MINI COOPER | AT-105 |
| MERCEDES | AT-106 |
| DSG | AT-107 |
| VW-AUDI CVT | AT-108 |
| VOLVO | AT-109 |
| TOYOTA-LEXUS | AT-110 |
| SKODA | AT-111 |
| VW Passat/Tiguan <2007 | AT-112 |

## 1884N/C8 018840200

## € 124,50

***Set of 8 adapters for item 1884***

Set contents:
- 1 adapter for Infiniti, 7-speed, M8x1.0
- 1 adapter for Honda, Hyundai, Kia 5x8x200 mm
- 1 adapter for Skoda M18x1.5
- 1 adapter for Mini M14x1.5
- 1 adapter for Nissan M10x1.5
- 1 adapter for Nissan Juke M12x1.25
- 1 adapter for GM M12x1.75
- 1 adapter for VAG group vehicles, 7-gear

200x145x40 mm

## 1438K/DSG-2 014380260

## € 627,00

***Tool set for aligning 6- and 7-speed DSG clutches***

For use with 6-speed DSG and manual-shift, 7-speed DSG (series 1 and 2) and S-tronic gearboxes.

350x370x117 mm

## 1438K/PWR 014380270

## € 429,00

***Removal/installation tool set for Powershift dual clutch transmission***

440x400x85 mm

## 1471M/C22 014710101

**€ 326,00**

***Pneumatic tool for pushing back and rotating right and left disc brake pistons***
*with accessories*

- Automatic jack
- Thrust: 150 kg
- Operating pressure 5÷8 bar

350x310x85 mm

## 1466/C5 014660100

**€ 137,00**

***Kit of 5 brake bleeding wrenches***

Kit contents:
- 5 wrenches sizes 7-8-9-10-11 mm
- 1 drain hose with check valve

***OIL GOES INTO BUSH***

260x170x50 mm

## 1467LF/2 014670099

**€ 1.905,00**

***Electric instrument for brake fluid replacement***

**Allows brake fluid to be easily and quickly replaced on vehicle**

- Automatically stops when tank is empty, thereby preventing air from being let in
- Maximum tank volume: 20 l
- Operating pressure: 0.4÷3.5 bar
- Power supply: 230V

Supplied with:
- Brake oil recovery tank
- 1 standard cap E20

***"PULSATING EFFECT"***

15 kg

**50% RABAT**

## 1471T/C5 014710400

3/4"

**€ 270,00**

***5 slogging wrenches for truck brake calipers***

Can be used with torque wrenches for tightening operations
Included sizes:
- female Torx wrenches E18, E20, E24
- ring wrenches M24, M26

275x220x60 mm

***Tyre inflator***

- Shockproof rubber coated body
- Metal operating lever
- Operating pressure: 0,5÷12 bar, 7÷174 psi
- Pipe length: 58 cm
- 360° hose rotation
- 1/4" air inlet

## 1949GPA 019490018

**€ 115,00**

- Pressure release feature
- Pressure measurement feature

***DIGITAL***

## 1949DGT/2 019490021

**€ 137,50**

***Digital tyre inflator***

- 4 units of measurement, bar/psi/kpa/kgf
- Backlit LCD display
- Resolution: 0.05 bar
- Self-power off after 1.5 minutes

## 1713M/K7 017130100 € 165,00

NEW!

***Kit of 7 inspection tools***

Kit contents:
- 1 telescopic handle, length 185÷660 mm and 1/4” hexagon drive
- 1 rectangular inspection mirror, 65x43 mm
- 1 round inspection mirror, Ø 52 mm
- 1 magnet, Ø 16.3 mm
- 1 ultra-bright LED light
- 1 flexible pickup tool (item 1713M)
- 1 magnetic tote tray made from stainless steel
- 3 LR44 cell batteries

297x165x52 mm

## 1950BZK 019500078 € 333,00

***Tyre bead seater***

- Secondary handle with push-button operation helps keep hold of tool during use
- Tank capacity: 18 l
- Operating pressure: 3-8 bar
- Maximum tank pressure: 16 bar
- Pressure relief valve
- Gauge with graduated scale
- Plastic inlet preventing rim damage

## 972/C10 009720010

**€ 311,00**

***Removal kit for damaged wheel nuts***

For use on anti-theft and conventional nuts

290x250x60 mm

## 972/C4BMW 009720004

**€ 246,00**

***Removal kit for anti-theft bolts with free rings, for BMW and Mini cars***

516x145x66 mm

## 983PM 009830010 € 80,50

***Abrasive brush for cleaning hubs***

1/2" 1/4

| Ø1 mm | Ø2 mm |
|---|---|
| 90 | 150 |

## 983 PM/R-DA 009830050 € 74,50

***Abrasive discs, pair, for item 983PM***

***Ø 150 mm***

## 720FRD 007200633 € 20,30

***Impact socket for Ford wheel nuts with aluminium damaged caps***

1/2"

Required when nut caps are damaged by impact wrenches

| mm | L mm |
|---|---|
| 18,5÷19,5 | 63 |

## 1566R 015660015 € 24,90

***Adjustable tool for removing/installing steering arms***

1/2"

| Ø mm |
|---|
| 27÷43 |

## 1471PT/C5 014710367 € 78,00

1/2"

***Impact socket kit for brake calipers nuts***

For cars of Volkswagen, Audi & Porsche group
- 3 10-tooth sockets: 11.5 mm - 15 mm - 20 mm
- 2 7-tooth socket: Ø 14 mm - 22 mm

***7-tooth***

***10-tooth***

| Ø mm | L mm |
|---|---|
| 25 | 50 |

## 720RNG 007200634 NEW! € 20,30

1/2"

***Impact socket for Jeep Renegade wheel nuts with aluminium damaged caps***

Required when nut caps are damaged by impact wrenches

| mm | L mm |
|---|---|
| 16,5÷17,5 | 63 |

## 1568 015680001 € 254,00

***Pneumatic assembly tool for silicone axle shaft boots***

- 8 spreader arms
- Maximum arm spreading: 145 mm

| L mm | L1 mm |
|---|---|
| 420 | 195 |

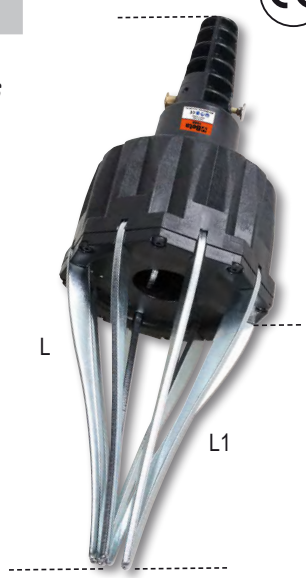

## 1567 015670001 € 356,00

***Lever for removing wishbone heads and shock absorbers from pillar***

One operator can position lever effortlessly and proceed with disassembly

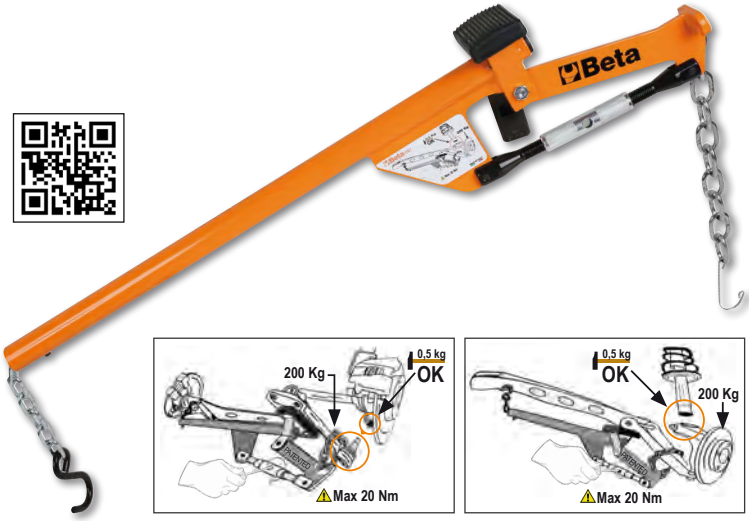


## 1569/SB 015690016

**€ 263,00**

***Assortment of tools for removing and installing rear axle silent blocks, riving shaft oil seals and wheel bearings***

Bushings can be used both on vehicle and on hydraulic press

13 kg

425x365x100 mm

## 1550U 015500010 € 3.160,00

***Pneumatic shock absorber removal tool for cars, SUVs and commercial vehicles***

- Upper universal hold system that allows all left/right-hand spring diameters to be compressed with one upper adaptable plate
- Active safety system on spring: safety hook and 3 locking valves allow spring to be properly positioned/seated, maintaining such position throughout compression If spring is not positioned properly, system will stop machine.
- Protective "Full Body" Grille

- Supplied with 2 lower forks for diameters 78-205 mm
- Maximum thrust: 2 tons (10 bars) - 1.6 tons (8 bars) - 1.2 tons (6 bars)
- Spring compression stroke: 335 mm

## 1550U/SS187 015500018

**€ 399,00**

***Left-hand fork for item 1550U***

Particularly suitable for left-hand springs, e.g. Nissan Qashqai and Renault Koleos

## 1550U/M 015500021

**€ 379,00**

***Vice for shock absorber removal tool item 1550U***

Allows shock absorber stem to be locked

## 1366SH 013660400 € 2.120,00 NEW!

### *Multifunction bodywork spotter*

- Microprocessor for managing welding parameters
- Contact and manual welding cycle start
- Automatic spot welding time setting function
- Supplied with quick coupling gun and 2.2-m-long ground cable

Accessory kit contents:
- extractor hammer
- three-pointed washer head
- 10 three-pointed washers
- carbon electrode
- squashing electrode

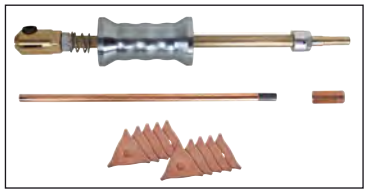

| | |
|---|---|
| Power supply | 230V |
| 50% power | 2.5 KVA |
| Power peak | 13 KVA |
| Amp output | 2850 (2%) A |
| Max. Amp output | 3200 A |

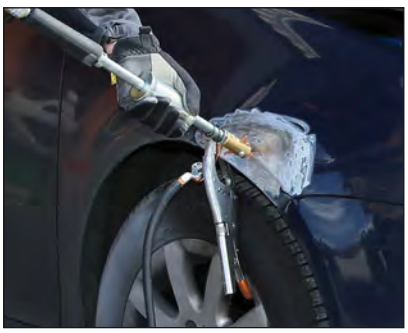

## 1366SH/C 013660410 NEW!

### € 414,00

### *Trolley for spotter 1366SH*

## 1365/K13 013650013 € 841,00

### *Oil pressure pump, 10 t, and bodywork accessories kit in handy trolley*

Kit contents:
- oil pressure pump, 10 t, with 1.5-m-long hose, 1/2” coupling
- piston
- wing opening pliers; capacity: 500 kg
- baseplate, 150x90 mm
- L-shaped base, 50x50 mm
- 4-point punch
- round, knurled punch, Ø 50 mm
- wedge-shaped punch, 43 mm
- 240-mm-long extension
- 450-mm-long extension
- 475-mm-long extension
- rubber head
- male-to-male coupling for installing accessories

900x420x180 mm

## 1361/K9 013610030 € 323,00

### *Kit of 8 levers for bodywork dent pullers*

Kit contents:
- round ball head rod, Ø 31 mm, length 110 cm
- tip rod, length 62 cm
- whale tail tip rod, length 112 cm
- hook tip rod, length 27 cm
- flat round head rod, length 50 cm
- round ball head rod, Ø 19 mm, length 52 cm
- whale tail head rod, length 27 cm
- round whale tail head rod, length, 28 cm
- fabric bag with handles

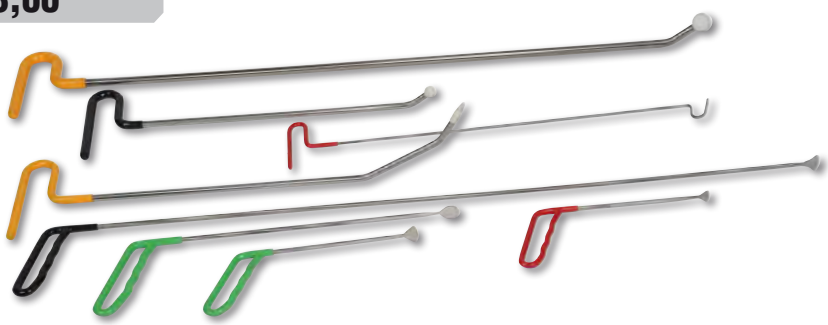

## 1366A 013660200 € 94,50

***Dent puller with kit of 19 plastic glue tabs***

Ideal for removing:
- Hail dents
- Dents caused by doors
- Small dents in general

## 1367/K4 013670010 NEW!

**€ 70,00**

***Kit of 4 wheel arch clamps, arc-type***

**Particularly suitable for aligning wheel arch with door**
- Maximum jaw opening: 6.5 mm

## 1479L/K4 014790604 € 36,50

***4 wrecking bars for jobs on dashboards and delicate parts***

## 1479LB/C5 014790150

**€ 114,50**

***Kit of 5 metal trim pin removers***

215x165x50 mm

## 1478/K3 014780160 € 110,50

***Pin removing pliers kit with plastic clips assortment***

Kit contents:
- Flat nose pliers (1 pc.)
- 90° bent nose pliers (1 pc.)
- 625 plastic clips in 16 different sizes
- Clips in 3 stackable PPL containers

| L mm | L1 mm |
|---|---|
| 180 | 170 |

## 1478NSS 014780163 € 44,00

***Plastic pin removal pliers with 3 release points***

| L mm |
|---|
| 180 |

## 1364SE 013640001 € 427,00

***Extension bodywork support***

Specifications:
- 4 swivel castors, 2 with brakes
- Pantograph can be extended up to 1400 mm
- Vertically adjustable up to 1315 mm
- Position locking
- Contact surface covered with removable rubber




| L mm | H mm | P mm |
|---|---|---|
| 215÷1400 | 780÷1315 | 890 |

## 1364SV 013640002 € 242,50

***Bodywork support with central tray***

Specifications:
- Contact surface covered in polyethylene
- Tray dimensions: 340x845x40 mm
- Foldable

| H mm |
|---|
| 1000 |

## 1364SCP 013640003

## € 389,00

***Revolving bodywork support***

Specifications:
- Particularly suitable for bonnets, wings and doors
- Fitted with 4 castors - 2 steering with brakes
- Can be rotated up to 180°






| L mm | H mm | P mm |
|---|---|---|
| 1100 | 1300 | 680 |

## 1364SP 013640004 € 194,00

***Bodywork support with suction cups***

Specifications:
- Particularly suitable for use with windows
- Fitted with 4 suction cups, Ø 95 mm
- Extension can be adjusted by means of a chain
- Polyethylene coated tube

***PARTICULARLY SUITABLE FOR USE WITH WINDOWS***

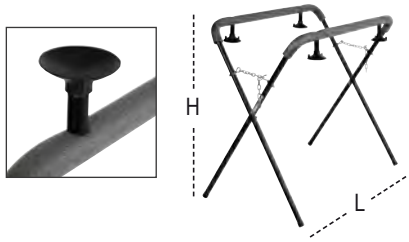


| L mm | H mm |
|---|---|
| 950 | 1250 |

## 1364SR 013640005

**NEW!**

**€ 248,50**

***Wheeled dispenser for masking paper rolls***

Specifications:
- With 2 handling wheels
- 3 paper roll bars with built-in paper cutting blade
- Built-in paper tape support
- Max. paper roll dimensions: 350 - 650 -1050 mm




| L mm | H mm | P mm |
|---|---|---|
| 1530 | 1080 | 520 |

## 1768 017680010 € 201,50

***Aluminium footboard***

***SURFACE COATED WITH NON-SLIP MATERIAL***

| L mm | L1 mm | H mm |
|---|---|---|
| 960 | 300 | 475 |

## 3009 030090001 € 452,00

***Wheel lifter***

Maximum lifting capacity: 550 kg
- 4 pivoting rollers
- Roller width: 200 mm
- For wheels up to 240 mm in width

***IDEAL FOR:***
- ***LOADING DAMAGED CARS ONTO TOW TRUCKS***
- ***CAR REPAIR GARAGES***
- ***MOVING CARS IN SHOWROOMS***

## 2254A

***Car covers, for outdoor use, water-repellent and UV-resistant***

Technical specifications:
- Exterior finish with UV protection treatment
- Soft, nonscratch interior finish
- 6 adjustment strings for making cover fit close to car
- 2 front door zips to allow access to vehicle without having to remove cover
- Mirror seats
- Reflecting

| | Tg | Categories | Dimensions mm | | € |
|---|---|---|---|---|---|
| 2254A/M | M | COMPACT CARS | 4000X1450X1300 | 022540002 | € 162,00 |
| 2254A/L | L | SALOON CARS AND STATION WAGONS | 5300X1450X1150 | 022540000 | € 181,00 |
| 2254A/XL | XL | SUV | 4700X1450X1580 | 022540001 | € 166,00 |

***THESE COVERS ARE IDEAL FOR PROTECTING DAMAGED VEHICLES WHILE WAITING TO BE REPAIRED***

## 2254K

022540101

**€ 31,00**

***Reusable seat, steering wheel and gear knob protector***

## 3099E

***Outdoor motorcycle cover, water and dust resistant***

Protects paint from scratches, dust and sunlight.
- **Size "M" recommended for sports and naked motorcycles and mid-size scooters**
- **Size "L" recommended for maxi enduro and crossover motorcycles**



| | Tg | A mm | B mm | C mm | D mm | E mm | | € |
|---|---|---|---|---|---|---|---|---|
| 3099E/M | M | 2290 | 990 | 1250 | 350 | 900 | 030990102 | € 87,50 |
| 3099E/L | L | 2500 | 1100 | 1650 | 1100 | 1500 | 030990103 | € 107,50 |

## 3099T

***Indoor motorcycle cover, made from stretch fabric***

Protects paint from scratches, dust and sunlight.

- **Size "M" recommended for sports and naked motorcycles and mid-size scooters**
- **Size "L" recommended for maxi enduro and crossover motorcycles**
- **Size "XL" recommended for super touring motorcycles**



| | Tg | A mm | B mm | C mm | D mm | E mm | | € |
|---|---|---|---|---|---|---|---|---|
| 3099T/M | M | 2050 | 900 | 1000 | 350 | 800 | 030990202 | € 76,00 |
| 3099T/L | L | 2700 | 1100 | 1300 | 550 | 1100 | 030990203 | € 93,00 |
| 3099T/XL | XL | 3100 | 1300 | 1400 | 700 | 1200 | 030990204 | € 112,50 |

## 1875LT 018750000 € 602,00

***Injection/extraction carpet/upholstery cleaner***

**Ideal for deeply cleaning textile surfaces.**
It dispenses pressure sprayed detergent and sucks it up with dirt, leaving surfaces almost dry

**Supplied accessories:**
- 1 hose complete with ergonomic handle
- 1 dispenser unit
- 2 hard extensions
- 1 small spray extraction nozzle
- 1 big spray extraction nozzle
- 6 power cord locknuts

**Technical data:**
- voltage: 230/240 V
- frequency: 50/60 Hz
- max. power: 1100 W
- airflow rate: 58 l/sec.
- max. drum capacity: 20 l
- max. detergent tank capacity: 3 l
- max. pump pressure: 7 bar
- max. suction pressure: 21 kPa
- pump power: 48 W

***HIGHLY EFFECTIVE FOR CAR SEATS AND INTERIORS***

## 1875SP/K3 018750010 € 19,40

***Kit of fabric cleaning brushes***
- 1 flat brush Ø 48 mm
- 1 flat brush Ø 100 mm
- 1 hemispheric brush Ø 90 mm
- 1/4 impact socket drive”

## 1898/S 018980932 € 28,00

***Hand pressure pump with 5 l tank***
- Stainless steel nozzle
- Locking lever for continuous jet
- Adjustable nozzle with straight jet and mist spray
- Shoulder strap for ease of transport
- Nozzle hook-up handle
- 1.2-m-long hose
- Not for use with hydrocarbons

## 1898/M 018980930 € 16,10

***Pressure sprayer with 2 l tank***
- Adjustable nozzle with straight jet and mist spray
- Graduated scale (0.5 l - 1 l - 1.5 l - 2 l)
- Locking lever for continuous jet
- Not for use with hydrocarbons

## 3003PRO 030030150 € 359,00

***Creeper made of shockproof plastic***

- Ergonomic head cushion
- Soft back protector
- 2 178 mm double bearing castors for trouble-free use on uneven surfaces and pipes/cables
- 1 steering castor
- Double height adjustment from the ground: 38 or 76 mm
- 2 portable LED lamps (250 lumens) with fixing magnets
- Load capacity: 200 kg
- Weight: 7.7 kg

***DOUBLE LED LAMP WITH MAGNET***

***DURABLE AND ERGONOMIC***




| H min mm | H Max mm | L mm | L1 mm |
|---|---|---|---|
| 170 | 230 | 1040 | 570 |

## 3002 030020001 € 121,50

***Creeper and seat***

- Steel frame
- PVC lining with upholstery
- Easily convertible into a creeper or a seat

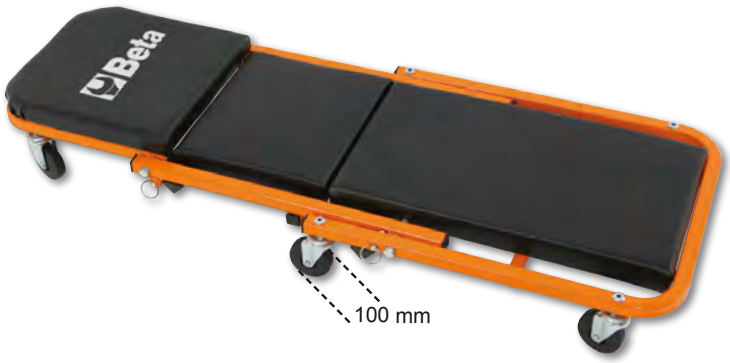


## 3029L/2T 030290120

**€ 520,00**

***Long, lowered hydraulic jack, 2 t***

Makes it possible to work on vehicles with a reduced height from the ground and internal lifting point

- Controlled descent speed
- Quick approach pedal
- Nylon wheels

| H min-Max mm | L mm | L1 mm |
|---|---|---|
| 75÷530 | 930 | 295 |



## 3029/2T 030290020

**€ 449,00**

***Lowered hydraulic jack, 2 t, with 4 wheels***

- Quick approach pedal
- Steel frame and nylon wheels
- Minimum height: 75 mm

| H min-Max mm | L mm | L1 mm |
|---|---|---|
| 75÷500 | 720 | 290 |

## 3033E/3T 030330130

**€ 419,00**

***Hydraulic jack, 3 t***

- Controlled descent speed
- Nylon wheels

| H min-Max mm | L mm | L1 mm |
|---|---|---|
| 95÷515 | 700 | 370 |

## 3030H/2T 030300220

**€ 715,00**

***High-lift hydraulic jack, 2 t, with 6 wheels***

Makes it possible to work on vehicles that are high from the ground and have a long shock absorber travel

- Controlled descent speed
- Quick approach pedal
- Nylon wheels

| H min-Max mm | L mm | L1 mm |
|---|---|---|
| 85÷780 | 1010 | 300 |

## 3030/2T 030300020

**€ 854,00**

***Lowered hydraulic car jack, 2 t with 6 wheels***

- Car jack can be easily handled on uneven, irregular floors
- Dual front tilting wheels made of plastic material (PTFE)
- Pedal allows easy approach

| H min-Max mm | L mm | L1 mm |
|---|---|---|
| 85÷520 | 860 | 400 |

## 3033/3T 030330030

**€ 1.130,00**

***Hydraulic jack, 3 t long version***

- Particularly suitable for use on commercial vehicles
- Polyamide wheels

| H min-Max mm | L mm | L1 mm |
|---|---|---|
| 140÷520 | 1180 | 370 |

## 3028

***Hydraulic press with moving piston***

**3028 20** 030280020
**€ 1.615,00**

**3028 30** 030280030
**€ 2.250,00**

**3028 50** 030280050
**€ 3.940,00**

**NEW!**

**3028 15** 030280015
**€ 1.111,00**

| | 3028 15 | 3028 20 | 3028 30 | 3028 50 |
|---|---|---|---|---|
| Maximum capacity | 15 t | 20 t | 30 t | 50 t |
| Single speed pump | ✓ | ✓ | ✓ | ✓ |
| Moving piston | ✓ | ✓ | ✓ | ✓ |
| Hydraulic safety in case of overloading | ✓ | ✓ | ✓ | ✓ |
| Gauge | ✓ | ✓ | ✓ | ✓ |
| Set of V-shaped prisms | ✓ | ✓ | ✓ | ✓ |
| Hoist | x | x | x | ✓ |

## 3028SP

***Protective screen for presses 3028***

| NEW! | Presses | | € |
|---|---|---|---|
| 3028SP/15 | 3028 15 | 030280016 | € 161,50 |
| 3028SP/20 | 3028 20 | 030280021 | € 180,50 |
| 3028SP/30 | 3028 30 | 030280031 | € 180,50 |
| 3028SP/50 | 3028 50 | 030280051 | € 191,50 |

## 3028/KP

030280055 **NEW!**

**€ 140,00**

***Kit of pin punches and plate for presses 3028***

Sizes of pin punches:
Ø10X90mm
Ø12X90mm
Ø16X90mm
Ø18X115mm
Ø20X115mm
Ø22X115mm
Ø25X140mm
Ø30X140mm

## 3023

030230050

**€ 226,00**

***Pit and under bridge jack with screw adjustment***

kg 350

| H min-Max mm | Ø mm |
|---|---|
| 1350÷2030 | 300 |

## 3025N 1,0

030250110

**€ 2.315,00**

**NEW!**

***Folding hydraulic crane with dual effect pump***

- Maximum capacity: 1 t
- 4 loading positions: 300-600-800-1000 kg
- With load limiting valve and chrome-plated stand
- Controlled descent speed
- Nylon wheels
- Maximum height: 2420 mm

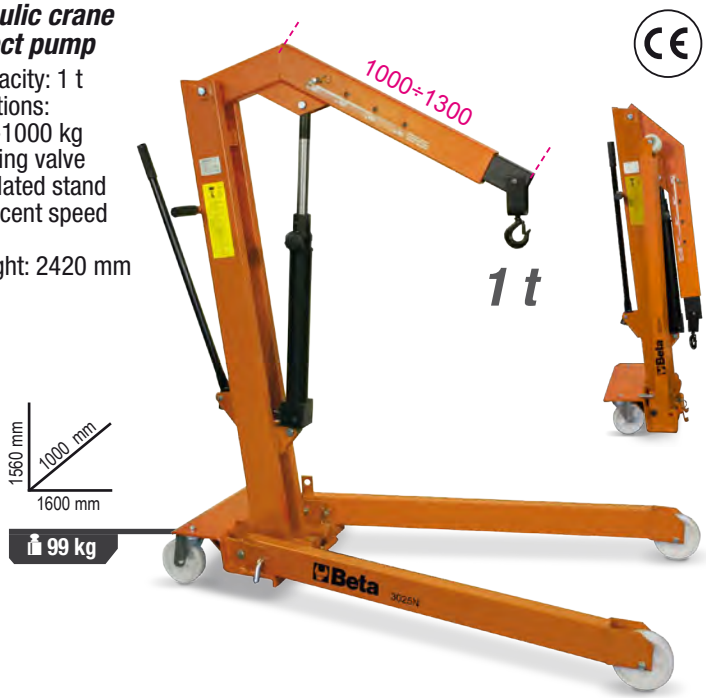


## 3011T

***Hydraulic bottle jacks***

| NEW! | C max kg | H min÷max mm | | € |
|---|---|---|---|---|
| 3011T 2 | 2000 | 170÷366 | 030110020 | € 95,00 |
| 3011T 3,5 | 3000 | 170÷366 | 030110035 | € 106,00 |
| 3011T 5 | 6000 | 203÷467 | 030110050 | € 119,50 |
| 3011T 10 | 10000 | 220÷484 | 030110100 | € 179,00 |
| 3011T 15 | 15000 | 230÷497 | 030110150 | € 219,00 |
| 3011T 20 | 20000 | 245÷521 | 030110200 | € 314,00 |

## 3010T

***Jack stands, pair***

| | C max kg | H min÷max mm | | € |
|---|---|---|---|---|
| 3010T 2 | 2000 | 280÷425 | 030100002 | € 106,50 |
| 3010T 3 | 3000 | 285÷430 | 030100003 | € 126,50 |
| 3010T 6 | 6000 | 400÷580 | 030100006 | € 183,50 |
| 3010T 10 | 10000 | 471÷735 | 030100010 | € 316,00 |

## 3050/600

***Electro-hydraulic motorcycle jack, 600 kg***

- Electrical, mechanical and hydraulic safety devices
- Capacity: 600 kg
- Integrated electro-hydraulic unit: 230V - 50 Hz
- Hydraulic pump
- Controlled downward speed
- Safety fuses for protection in case of cable cuts
- Control push button panel
- CE-certified, TÜV-approved

| Ral 2011 | Ral 7016 | Ral 3000 |
|---|---|---|
| 030500201 | 030500202 | 030500203 |

**€ 5.720,00**

| H min-Max mm | L mm |
|---|---|
| 185÷1110 | 2100 |

## 8143

TÜV EN13157

### *Hand chain blocks*

- Professional model, made of first-rate materials
- Automatic brake with double pawl system
- Swivel hook with safety latch

**8143 0,5T** 081430005
**€ 211,50**

| WLL t | L m |
|---|---|
| 0,50 | 3 |

9,2 kg

**8143 1T** 081430010
**€ 249,50**

| WLL t | L m |
|---|---|
| 1 | 3 |

11,7 kg

**8143 2T** 081430020
**€ 362,00**

| WLL t | L m |
|---|---|
| 2 | 3 |

19,5 kg

## 8146

TÜV EN13157

### *Lever hoists*

- Professional model, complies with EN13157 standard, easy to install and use.
- Automatic brake with double pawl system for optimized safety.
- Swivel hook with safety latch.

**8146C 0,25T** 081460002
**€ 237,50**

| WLL t | L m |
|---|---|
| 0,25 | 1,5 |

2,5 kg

**8146 0,75T** 081460008
**€ 258,00**

| WLL t | L m |
|---|---|
| 0,75 | 1,5 |

6,7 kg

**8146 1,5T** 081460015
**€ 367,00**

| WLL t | L m |
|---|---|
| 1,50 | 1,5 |

11,2 kg

## 8135

### *Steel plate lifting clamps with articulated lifting eyes*

- Professional model, compliant with EN13155, made from high-quality materials
- Suitable for lifting steel plates, rotating by 180°, and plate transportation in vertical position
- For plates with hardness up to 30HRC (300HB)
- Cam safety lock for easier steel sheet insertion and safe gripping
- Identification plate with serial number and batch number
- Safety factor: 3:1
- Minimum WLL is 10% of maximum WLL

**TECHNICAL DATA**
- Safety factor: 3
- Serial number identification plate

**AVAILABLE CERTIFICATES**
- Manufacturer's Certificate
- CE Declaration of Conformity
- Test report UNI EN10204 type 2.2
- Technical product specifications

EN13155

Do not lift any load weighing less than 10% of the maximum rated capacity.




| | max WLL t | A mm | kg | | € |
|---|---|---|---|---|---|
| **8135 0,75T** | 0,75 | 0-15 | 2 | 081350005 | **€ 131,00** |
| **8135 1,0T** | 1,0 | 0-20 | 5 | 081350010 | **€ 177,00** |
| **8135 2,0T** | 2,0 | 0-25 | 8 | 081350020 | **€ 263,00** |

| max WLL (t) | Dimensions mm | | | | | | |
|---|---|---|---|---|---|---|---|
| | B | C | D | E | F | G | H |
| 0,75 | 205 | 125 | 10 | 27 | 105 | 35 | 40 |
| 1,0 | 290 | 170 | 12 | 48 | 145 | 45 | 56 |
| 2,0 | 375 | 205 | 17 | 67 | 175 | 56 | 56 |

**ROBUR**'s permanent magnetic lifters stand out as compact, sturdy, reliable machines; they are widely used in factories, warehouses, harbour quays and transportation facilities. Designed in compliance with EN13155, this equipment is suitable for lifting and handling magnetic iron materials, including dies, sheet metal, pipes, fittings, beams and bars.
The permanent magnet is made from a Neodymium-Iron-Boron alloy, which has an extremely high attractive force and is defined as "super magnetic".
Since magnetic lifters require no voltage, they can also be used in places where no power connection is available.
One operator can easily lift, transport and release the load through the operating lever: when the lever is moved into the ON position, a spring mechanism will lock it, keeping the magnet active and preventing accidental release.

## 8134 NEW!

*EN13155*

### *Permanent magnetic lifters*

**TECHNICAL DATA**
- Safety factor: 3
- Identification tag

**AVAILABLE CERTIFICATES**
- Manufacturer's Certificate
- Declaration of Conformity with Machinery Directive 2006/42/EC
- Test Report UNI EN10204 type 2.2
- Operation and maintenance manual

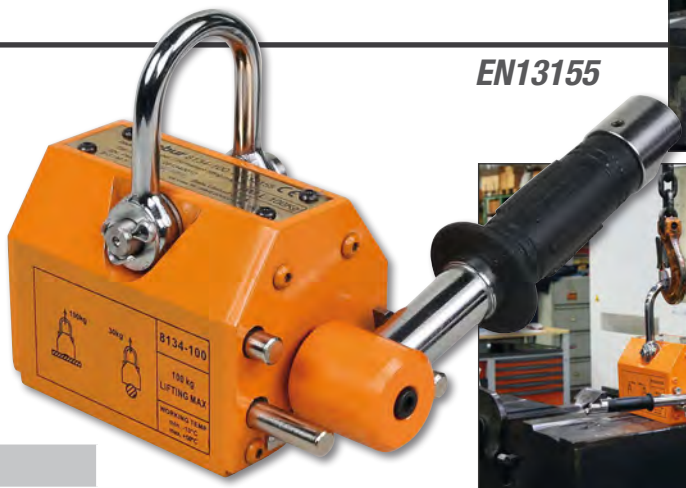

| | | € |
|---|---|---|
| **8134 100 KG** | 081340010 | **€ 457,00** |
| **8134 300 KG** | 081340030 | **€ 802,00** |
| **8134 600 KG** | 081340060 | **€ 1.490,00** |
| **8134 1000 KG** | 081340100 | **€ 2.465,00** |

Remove any protective films, dirt, grease, oil etc. between the magnet and the load.

## *Automatic hose reel*

**Shockproof plastic body, for air or water**
- Netted polyurethane hose
- Device for automatic locking of the hose at required length
- Rack mechanism can be disabled to keep hose in traction
- Operating temperature range: -5 °C / +50 °C
- Supplied with a 180° swivel bracket and an additional quick connection bracket

### 1900S 8X10 019000080

**€ 177,50**

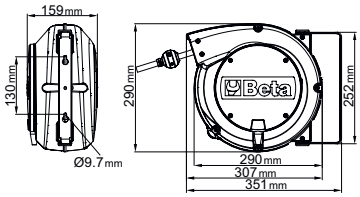


| | | |
|---|---|---|
| Air inlet | GAS | 1/4" |
| Hose length | m | 10 |
| Operating pressure | bar | 15 |
| Ø Hose | mm | 8x12 |
| Hose material | | polyurethane |

### 1900M 10X15 019000115

**€ 253,00**

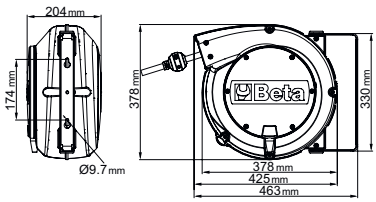


| | | |
|---|---|---|
| Air inlet | GAS | 3/8" |
| Hose length | m | 15 |
| Operating pressure | bar | 15 |
| Ø Hose | mm | 10x14 |
| Hose material | | polyurethane |

## 720XZN/C6 007201530 NEW! 1/2"

**€ 133,00**

***Set of 6 impact socket drivers for XZN® head screws, phosphated,*** *in metal case*

M8-M10-M12-M14M16-M18

275x120x65 mm

## 720B/C12 007201912 NEW! 1/2"

**€ 197,50**

***Set of 12 bi-hex impact sockets, phosphated,*** *in metal case*

10-11-12-13-14-1719-22-24-27-30-32 mm

195x80x55 mm

## 720ME/C8 007200525 1/2"

**€ 155,00**

***Set of 8 impact socket drivers for hexagon screws***

5-6-8-10-12-14-17-19 mm

270x120x45 mm

## 720LC/C3 007200653 1/2"

**€ 40,00**

***Set of 3 impact sockets for wheel nuts, with polymeric inserts,*** *in plastic case*

17-19-21 mm

148x132x44 mm

## 1927XM 019270030 € 302,00 1/2"

***Compact reversible impact wrench***

- Single hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle
- Balancing hook

| | | |
|---|---|---|
| Free speed | rpm | 10.000 |
| Impulse device | | Single hammer |
| Max. torque | Nm | **770** |
| Bolt capacity | Cl 8.8 | M22●34 mm |
| Bolt capacity | Cl 12.9 | M18●27 mm |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 122 |



1,3 kg

## 1927XM/K5 019270129 1/2"

**€ 367,00**

***Assortment of 1 compact reversible impact wrench and 5 impact sockets,*** *in plastic case*

**720** 17-19-21-22-24 mm

2,8 kg

307x206x86 mm

## 1927CD 019270007 € 410,00 1/2"

***Reversible impact wrench***

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- High torque
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Silenced

| | | |
|---|---|---|
| Free speed | rpm | 7.000 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **1020** |
| Bolt capacity | Cl 8.8 | M22⬢34 mm |
| Bolt capacity | Cl 12.9 | M18⬢27 mm |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 130 |

## 1927CD/K3 019270107 € 461,00 1/2"

***Assortment of 1 reversible impact wrench and 3 impact sockets,*** *in plastic case*

## 1927P 019270008 € 447,00 1/2"

***Reversible impact wrench***

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever
- Three power adjustable screwing positions
- Exha
- Vib

**50% RABAT**

| | | |
|---|---|---|
| Free speed | rpm | 7.500 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **1750** |
| Bolt capacity | Cl 8.8 | M24⬢36 mm |
| Bolt capacity | Cl 12.9 | M20⬢30 mm |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 290 |

## 1927P/K3 019270118 € 521,00 1/2"

***Reversible impact wrench, supplied with 3 impact sockets,*** *in plastic case*

## 1927B 019270022 € 198,00 1/2"

***Reversible impact wrench***

- "Pin Clutch" impulse device
- Rubber handle
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle

| | | |
|---|---|---|
| Free speed | rpm | 7.000 |
| Impulse device | | Pin Clutch |
| Max. torque | Nm | **705** |
| Bolt capacity | Cl 8.8 | M22⬢34 mm |
| Bolt capacity | Cl 12.9 | M18⬢27 mm |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 133 |

## 1927B/K5 019270122 € 261,00 1/2"

***Reversible impact wrench, made from aluminium, supplied with 5 impact sockets,*** *in plastic case*

## 728ME/C6 007280906 NEW! 3/4"

**€ 255,00**

***Set of 6 impact socket drivers for hexagon screws,*** *in metal case*

○ 12-14-17-19-22-24 mm

335x145x60 mm

## 728B/C10 007280930 NEW! 3/4"

**€ 355,00**

***Set of 10 bi-hex impact sockets,*** *in metal case*

○ 17-19-22-24-27-30-32-36-41-46 mm

275x120x65 mm

## 1928XM 019280030 € 598,00

3/4"

***Compact reversible impact wrench***

- Double hammer impulse device
- Amazingly compact and powerful
- One-hand reverse button
- Three power adjustable screwing positions
- Exhaust through handle

| | | |
|---|---|---|
| Free speed | rpm | 4.800 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **1600** |
| Bolt capacity | CI 8.8 | M27⬢41 mm |
| Bolt capacity | CI 12.9 | M24⬢36 mm |
| Air inlet | GAS | 3/8" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 175 |



2,9 kg

***1600 Nm***

***ULTRA COMPACT AND POWERFUL***

## 1928CD 019280007 € 985,00

***Reversible impact wrench***

- Double hammer impulse device
- High weight/power ratio
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Silenced




3/4"

3,5 kg

| | | |
|---|---|---|
| Free speed | rpm | 4.500 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **1.800** |
| Bolt capacity | CI 8.8 | M27⬢41 mm |
| Bolt capacity | CI 12.9 | M24⬢36 mm |
| Air inlet | GAS | 3/8" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 215 |

## 1928DA 019280022 € 865,00

***Reversible impact wrench***

- Double hammer impulse device
- Sturdy and compact; high torque
- Reversible lever
- Three power adjustable positions
- Exhaust through handle
- Slip-proof ergonomic handle




3/4"

4,3 kg

| | | |
|---|---|---|
| Free speed | rpm | 5.000 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **1.695** |
| Bolt capacity | CI 8.8 | M30⬢46 mm |
| Bolt capacity | CI 12.9 | M27⬢41 mm |
| Air inlet | GAS | 3/8" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 210 |

## 1928P 019280006 € 1.190,00

NEW!

***Reversible impact wrench, made from composite material***

- Double hammer impulse device
- Lightweight and well-balanced for enhanced ease of use
- Reversible lever
- Three power adjustable screwing positions
- Exhaust through handle
- Vibration-damping handle

***2100 Nm***

***ULTRA COMPACT AND POWERFUL***

| | | |
|---|---|---|
| Free speed | rpm | 5.000 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **2.100** |
| Bolt capacity | Cl 8.8 | M30●46 mm |
| Bolt capacity | Cl 12.9 | M27●41 mm |
| Air inlet | GAS | 3/8” |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 221 |



## 1930PA 019300032 € 1.290,00

***Reversible impact wrench***

- Double hammer impulse device
- Auxiliary handle
- Reversible lever
- Three power adjustable screwing/unscrewing positions
- Exhaust through handle

| | | |
|---|---|---|
| Free speed | rpm | 3.500 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **2445** |
| Bolt capacity | Cl 8.8 | M36●55mm |
| Bolt capacity | Cl 12.9 | M30●46mm |
| Air inlet | GAS | 1/2” |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 13 |
| Mean air consumption | l/min | 350 |

## 1930LH 019300030 € 1.335,00

1”

***Reversible impact wrench***

- Double hammer impulse device
- 210 mm (8.3”) long anvil
- 70-degree angled handle design to relieve stress and fatigue on the operator’s wrists
- Auxiliary side handle
- 3 power adjustable screwing/unscrewing positions
- Lower exhaust
- Excellent weight/power ratio




| | | |
|---|---|---|
| Free speed | rpm | 6.000 |
| Impulse device | | Double hammer |
| Max. torque | Nm | **2441** |
| Bolt capacity | Cl 8.8 | M36●55mm |
| Bolt capacity | Cl 12.9 | M30●46mm |
| Air inlet | GAS | 1/2” |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 13 |
| Mean air consumption | l/min | 280 |

## *Reversible air impact ratchets*

- Double rocking dog" impulse device
- Easy tightening: The impact mechanism system eliminates wrist twisting at end of screwing and shortens operating time
- Compact and powerful: maximum torque is significantly higher than maximum torque as achieved with a conventional ratchet
- Ergonomic rubber handle

### 1/2" 136 Nm

1,5 kg

**1922P3** 019220013 **€ 437,00**

| | | |
|---|---|---|
| Free speed | rpm | 600 |
| Maximum torque | Nm | **136** |
| Bolt capacity | Cl 8.8 | M12●18 mm |
| Bolt capacity | Cl 12.9 | M10●16 mm |
| Air inlet | GAS | 1/2" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 113 |

***HIGH TORQUE WITHOUT AFFECTING WRIST***

### 1/4" 68 Nm

600 g

**1922P1** 019220006 **€ 277,00**

### 3/8" 68 Nm

**1922P2** 019220010 **€ 277,00**

| | | |
|---|---|---|
| Free speed | rpm | 700 |
| Maximum torque | Nm | **68** |
| Bolt capacity | Cl 8.8 | M10●16 mm |
| Bolt capacity | Cl 12.9 | M8●13 mm |
| Air inlet | GAS | 1/2" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 88 |

**1933IH** 019330006 **€ 224,00**

### *High-power die grinder*

- Collect chuck, Ø 3 mm and 6 mm

800 g

| | | |
|---|---|---|
| Free speed | rpm | 20.000 |
| Chuck capacity | mm | 3-6 |
| Power | kW | 0,75 |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 370 |

**1942A** 019420000 **€ 338,00**

### *Air saw*

- Powerful and handy
- Designed for cutting bodies, exhaust pipes and silencers, aluminium and plastic
- Complete with rubber handle, PVC exhaust pipe and air-feeding hose
- Rear exhaust

550 g

| | | |
|---|---|---|
| Strokes per minute | | 10.000 |
| Stroke length | mm | 10 |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 8 |
| Mean air consumption | l/min | 75 |




**1936/5A** 019360025 **€ 455,00**

### *Angle grinder*

- Extremely compact and handy
- Air governor for automatically controlling top speed
- Right-hand/left-hand auxiliary handle
- Spindle lock button
- Accessory for quickly changing discs
- Safety cap can be quickly adjusted in nine different positions through quick release
- Rear exhaust

***Ø 125 mm***

1,9 kg




| | | |
|---|---|---|
| Free speed | rpm | 10.000 |
| Power | kW | 0,66 |
| Spindle thread | | M14 |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 390 |

## 1937 5 019370001 € 480,00

### *Roto-orbital palm sander, lubrication free, made from composite material*

- No lubrication required
- Extremely compact and easy to handle
- 6-hole Velcro pad
- Continuous motor speed adjustment
- Nonslip, soft material handle
- Designed for connection to suction systems with swivel fittings
- Revolving exhaust




| | | |
|---|---|---|
| Free speed | rpm | 12.000 |
| Power | kW | 0,18 |
| Pad size | mm | 150 |
| Spindle thread | | 5/16"-24 |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Mean air consumption | l/min | 170 |

## 1946 C4,8 019460006 € 642,00

### *Automatic air suction riveter*

- Professional air riveter for use with 2.4 - 3.2 - 4.0 - 4.8 mm long steel, stainless steel, aluminium and copper rivets
- Pointed cone-shaped spout
- Powerful and handy, with handle made of composite material
- Complete with safety nail container and oil gun




| Material/Riveter | 2,4 | 3,2 | 4 | 4,8 |
|---|---|---|---|---|
| Copper | ✔ | ✔ | ✔ | ✔ |
| Aluminium | ✔ | ✔ | ✔ | ✔ |
| Steel | ✔ | ✔ | ✔ | ✔ |
| Stainless steel | ✔ | ✔ | ✔ | ✔ |

| | | |
|---|---|---|
| Traction power | N | 8.900 |
| Stroke length | mm | 15 |
| Maximum rivet capacity | Ø stainless steel | 4,8 mm |
| Air inlet | GAS | 1/4" |
| Operating pressure | bar | 6,2 |
| Internal hose size (Ø) | mm | 10 |
| Air consumption | l/cycle | 2,6 |

## 1949XS 019490025 NEW!

## € 7,15

### *Progressive blow pen*

- Made from light alloy
- Air flow can be adjusted by rotating head

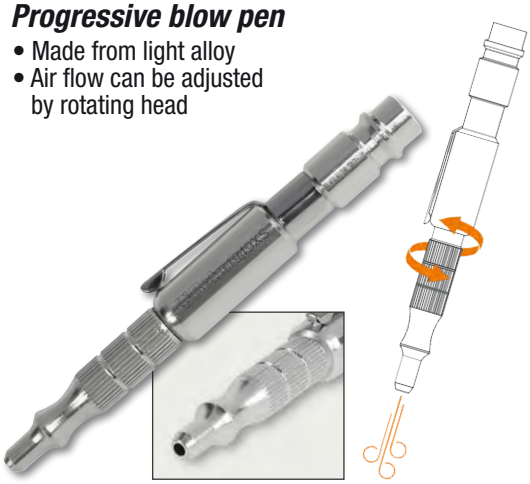

| | |
|---|---|
| Threaded brass insert | 1/4" GAS |
| Operating pressure | 3-8 bar |
| Maximum operating pressure | 10 bar |
| Operating temperature | -20°C ÷ 70°C |

## 1949U5 019490030 € 39,50

### *Progressive blow gun with 5 nozzles*

- Hard-wearing, shockproof composite material body
- 3 steel nozzles, 100/160/320 mm, scratchproof, protective rubber tips
- 1 "Turbo" nozzle made of fibreglass-reinforced nylon with safety tip
- 1 revolving nozzle, 100 mm, made of fibreglass-reinforced nylon
- With quick fixing system

| | |
|---|---|
| Threaded brass insert | 1/4" GAS |
| Operating pressure | 10 bar |
| Maximum operating pressure | 15 bar |
| Mean air consumption | 280 l/min |
| Operating temperature | -10°C ÷ 85° C |

# Beta O-Gravity

METAL FREE

EN ISO 20345 2011 CE

- EVA OUTSOLE WITH DURABLE NITRILE RUBBER TREAD
- HEEL STABILITY SUPPORT
- COMPOSITE FIBRE PENETRATION-PROOF INSOLE

NEW!

## 7371V — € 136,50

***O-Gravity mesh fabric shoe, ultrabreathable***

**The fluorescent colour and captivating design add a touch of innovation to the shoe.**

- Traditional lacing
- Wide fit

| EU | UK | |
|---|---|---|
| 38 | 5 | 073710038 |
| 39 | 6 | 073710039 |
| 40 | 6,5 | 073710040 |
| 41 | 7 | 073710041 |
| 42 | 8 | 073710042 |
| 43 | 9 | 073710043 |
| 44 | 10 | 073710044 |
| 45 | 10,5 | 073710045 |
| 46 | 11 | 073710046 |
| 47 | 12 | 073710047 |
| 48 | 13 | 073710048 |

S1PS HRO FO SR ESD | ESD | 11 | NUBES | EN ISO 20345 2022 | 450 g

## 7372B — € 139,50

***O-Gravity woven fabric shoe, ultralightweight, hard-wearing and ultrabreathable***

- Heel stability support, traditional lacing
- Wide fit

| EU | UK | |
|---|---|---|
| 38 | 5 | 073720038 |
| 39 | 6 | 073720039 |
| 40 | 6,5 | 073720040 |
| 41 | 7 | 073720041 |
| 42 | 8 | 073720042 |
| 43 | 9 | 073720043 |
| 44 | 10 | 073720044 |
| 45 | 10,5 | 073720045 |
| 46 | 11 | 073720046 |
| 47 | 12 | 073720047 |
| 48 | 13 | 073720048 |

S1P HRO SRC | 11 | NUBES | 450 g

## 7352B — € 132,00

***O-Gravity mesh fabric shoe, highly breathable, with TPU inserts***

- Carbon fibre toe cap
- Stretch slip-on collar

| EU | UK | |
|---|---|---|
| 38 | 5 | 073520138 |
| 39 | 6 | 073520139 |
| 40 | 6,5 | 073520140 |
| 41 | 7 | 073520141 |
| 42 | 8 | 073520142 |
| 43 | 9 | 073520143 |
| 44 | 10 | 073520144 |
| 45 | 10,5 | 073520145 |
| 46 | 11 | 073520146 |
| 47 | 12 | 073520147 |
| 48 | 13 | 073520148 |

S1P HRO SRC | ESSENTIAL | 450 g

## 7352G — € 136,50

***O-Gravity mesh fabric shoe, waterproof, with TPU inserts***

- Carbon fibre toe cap
- Traditional lacing
- Wide fit

| EU | UK | |
|---|---|---|
| 38 | 5 | 073520338 |
| 39 | 6 | 073520339 |
| 40 | 6,5 | 073520340 |
| 41 | 7 | 073520341 |
| 42 | 8 | 073520342 |
| 43 | 9 | 073520343 |
| 44 | 10 | 073520344 |
| 45 | 10,5 | 073520345 |
| 46 | 11 | 073520346 |
| 47 | 12 | 073520347 |
| 48 | 13 | 073520348 |

S1P HRO SRC ESD | ESD | 11 | ESSENTIAL | 450 g

EN ISO 20345 2011

METAL FREE

Beta O-Gravity

- *EVA OUTSOLE WITH DURABLE NITRILE RUBBER TREAD*
- *HEEL STABILITY SUPPORT*
- *COMPOSITE FIBRE PENETRATION-PROOF INSOLE*

## 7354N — € 136,00

***Mesh fabric shoe, waterproof, with TPU inserts***

- Carbon fibre toe cap
- Stretch slip-on collar

| EU | UK | |
|---|---|---|
| 38 | 5 | 073540038 |
| 39 | 6 | 073540039 |
| 40 | 6,5 | 073540040 |
| 41 | 7 | 073540041 |
| 42 | 8 | 073540042 |
| 43 | 9 | 073540043 |
| 44 | 10 | 073540044 |
| 45 | 10,5 | 073540045 |
| 46 | 11 | 073540046 |
| 47 | 12 | 073540047 |
| 48 | 13 | 073540048 |

S3 HRO SRC — ESSENTIAL — 460 g

## 7381N — € 162,00

***Water resistant EXTREME O-GRAVITY work shoes***

- Composite toe cap
- Waterproof, with bootie membrane, windproof, highly breathable
- Wide fit

| EU | UK | |
|---|---|---|
| 38 | 5 | 073810038 |
| 39 | 6 | 073810039 |
| 40 | 6,5 | 073810040 |
| 41 | 7 | 073810041 |
| 42 | 8 | 073810042 |
| 43 | 9 | 073810043 |
| 44 | 10 | 073810044 |
| 45 | 10,5 | 073810045 |
| 46 | 11 | 073810046 |
| 47 | 12 | 073810047 |
| 48 | 13 | 073810048 |

***WATER RESISTANT***

S3 HRO SRC WR — 11 — EXTREME — 500 g

## 7382N — € 181,50

***Water resistant EXTREME O-GRAVITY work shoes***

- Composite toe cap
- Waterproof, with bootie membrane, windproof, highly breathable
- Wide fit

| EU | UK | |
|---|---|---|
| 38 | 5 | 073820038 |
| 39 | 6 | 073820039 |
| 40 | 6,5 | 073820040 |
| 41 | 7 | 073820041 |
| 42 | 8 | 073820042 |
| 43 | 9 | 073820043 |
| 44 | 10 | 073820044 |
| 45 | 10,5 | 073820045 |
| 46 | 11 | 073820046 |
| 47 | 12 | 073820047 |
| 48 | 13 | 073820048 |

***WATER RESISTANT***

S3 HRO SRC WR — 11 — EXTREME — 550 g

## 7356G — € 140,50

***O-Gravity shoe, ultralightweight, made of water-repellent microfibre***

- Composite toe cap
- Stretch slip-on collar

| EU | UK | |
|---|---|---|
| 38 | 5 | 073560038 |
| 39 | 6 | 073560039 |
| 40 | 6,5 | 073560040 |
| 41 | 7 | 073560041 |
| 42 | 8 | 073560042 |
| 43 | 9 | 073560043 |
| 44 | 10 | 073560044 |
| 45 | 10,5 | 073560045 |
| 46 | 11 | 073560046 |
| 47 | 12 | 073560047 |
| 48 | 13 | 073560048 |

S3 HRO SRC — ESSENTIAL — 460 g

## 7357G — € 155,50

***O-Gravity ankle shoe, ultralightweight, made of water-repellent microfibre***

- Composite toe cap
- Traditional lacing

| EU | UK | |
|---|---|---|
| 38 | 5 | 073570038 |
| 39 | 6 | 073570039 |
| 40 | 6,5 | 073570040 |
| 41 | 7 | 073570041 |
| 42 | 8 | 073570042 |
| 43 | 9 | 073570043 |
| 44 | 10 | 073570044 |
| 45 | 10,5 | 073570045 |
| 46 | 11 | 073570046 |
| 47 | 12 | 073570047 |
| 48 | 13 | 073570048 |

S3 HRO SRC — ESSENTIAL — 480 g

# ACTIVE

• COMPOSITE TOE CAP
• COMPOSITE FIBRE PENETRATION-PROOF INSOLE

METAL FREE | EN ISO 20345 2011 | CE

## 7316NG

**€ 88,00**

*Mesh and suede shoe, highly breathable, with heel stability support*

S1P SRC ESD

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 073160635 |
| 36 | 3,5 | 073160636 |
| 37 | 4,5 | 073160637 |
| 38 | 5 | 073160638 |
| 39 | 6 | 073160639 |
| 40 | 6,5 | 073160640 |
| 41 | 7 | 073160641 |
| 42 | 8 | 073160642 |
| 43 | 9 | 073160643 |
| 44 | 10 | 073160644 |
| 45 | 10,5 | 073160645 |
| 46 | 11 | 073160646 |
| 47 | 12 | 073160647 |
| 48 | 13 | 073160648 |

## 7316NB

**€ 88,00**

*Mesh and suede shoe, highly breathable, with heel stability support*

S1P SRC ESD

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 073160735 |
| 36 | 3,5 | 073160736 |
| 37 | 4,5 | 073160737 |
| 38 | 5 | 073160738 |
| 39 | 6 | 073160739 |
| 40 | 6,5 | 073160740 |
| 41 | 7 | 073160741 |
| 42 | 8 | 073160742 |
| 43 | 9 | 073160743 |
| 44 | 10 | 073160744 |
| 45 | 10,5 | 073160745 |
| 46 | 11 | 073160746 |
| 47 | 12 | 073160747 |
| 48 | 13 | 073160748 |

## 7317NA

**€ 75,50**

*Suede shoe, perforated, with microfibre reinforcement in heel area*

S1P SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 073170135 |
| 36 | 3,5 | 073170136 |
| 37 | 4,5 | 073170137 |
| 38 | 5 | 073170138 |
| 39 | 6 | 073170139 |
| 40 | 6,5 | 073170140 |
| 41 | 7 | 073170141 |
| 42 | 8 | 073170142 |
| 43 | 9 | 073170143 |
| 44 | 10 | 073170144 |
| 45 | 10,5 | 073170145 |
| 46 | 11 | 073170146 |
| 47 | 12 | 073170147 |
| 48 | 13 | 073170148 |

## 7322SA

**€ 86,00**

*Fabric shoe, highly resistant to abrasion*

S3 SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 073220435 |
| 36 | 3,5 | 073220436 |
| 37 | 4,5 | 073220437 |
| 38 | 5 | 073220438 |
| 39 | 6 | 073220439 |
| 40 | 6,5 | 073220440 |
| 41 | 7 | 073220441 |
| 42 | 8 | 073220442 |
| 43 | 9 | 073220443 |
| 44 | 10 | 073220444 |
| 45 | 10,5 | 073220445 |
| 46 | 11 | 073220446 |
| 47 | 12 | 073220447 |
| 48 | 13 | 073220448 |

## 7320NA

**€ 79,50**

*Nubuck shoe, water-repellent, with anti-abrasion reinforcement in toe cap area*

S3 SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 073200435 |
| 36 | 3,5 | 073200436 |
| 37 | 4,5 | 073200437 |
| 38 | 5 | 073200438 |
| 39 | 6 | 073200439 |
| 40 | 6,5 | 073200440 |
| 41 | 7 | 073200441 |
| 42 | 8 | 073200442 |
| 43 | 9 | 073200443 |
| 44 | 10 | 073200444 |
| 45 | 10,5 | 073200445 |
| 46 | 11 | 073200446 |
| 47 | 12 | 073200447 |
| 48 | 13 | 073200448 |

## 7321NA

**€ 82,00**

*Nubuck shoe, water-repellent, with quick opening system and antiabrasion reinforcement in toe cap area*

S3 RS SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 073210435 |
| 36 | 3,5 | 073210436 |
| 37 | 4,5 | 073210437 |
| 38 | 5 | 073210438 |
| 39 | 6 | 073210439 |
| 40 | 6,5 | 073210440 |
| 41 | 7 | 073210441 |
| 42 | 8 | 073210442 |
| 43 | 9 | 073210443 |
| 44 | 10 | 073210444 |
| 45 | 10,5 | 073210445 |
| 46 | 11 | 073210446 |
| 47 | 12 | 073210447 |
| 48 | 13 | 073210448 |

*QUICK OPENING SYSTEM*

# FLEX

- COMPOSITE TOE CAP
- COMPOSITE FIBRE PENETRATION-PROOF INSOLE
- ANTI-ABRASION INSERT IN TOE CAP AREA

METAL FREE

EN ISO 20345 2011

## 7212B

**€ 74,00**

*Suede shoe, perforated, with mesh inserts*

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072120235 |
| 36 | 3,5 | 072120236 |
| 37 | 4,5 | 072120237 |
| 38 | 5 | 072120238 |
| 39 | 6 | 072120239 |
| 40 | 6,5 | 072120240 |
| 41 | 7 | 072120241 |
| 42 | 8 | 072120242 |
| 43 | 9 | 072120243 |
| 44 | 10 | 072120244 |
| 45 | 10,5 | 072120245 |
| 46 | 11 | 072120246 |
| 47 | 12 | 072120247 |
| 48 | 13 | 072120248 |

S1P SRC ESD | ESD | 490 g

## 7212G

**€ 74,00**

*Suede shoe, perforated*

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072120335 |
| 36 | 3,5 | 072120336 |
| 37 | 4,5 | 072120337 |
| 38 | 5 | 072120338 |
| 39 | 6 | 072120339 |
| 40 | 6,5 | 072120340 |
| 41 | 7 | 072120341 |
| 42 | 8 | 072120342 |
| 43 | 9 | 072120343 |
| 44 | 10 | 072120344 |
| 45 | 10,5 | 072120345 |
| 46 | 11 | 072120346 |
| 47 | 12 | 072120347 |
| 48 | 13 | 072120348 |

S1P SRC ESD | ESD | 490 g

## 7213G

**€ 74,00**

*Suede shoe, perforated, with highly breathable mesh inserts*

S1P SRC ESD | ESD | 490 g

HIGHLY BREATHABLE

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072130135 |
| 36 | 3,5 | 072130136 |
| 37 | 4,5 | 072130137 |
| 38 | 5 | 072130138 |
| 39 | 6 | 072130139 |
| 40 | 6,5 | 072130140 |
| 41 | 7 | 072130141 |
| 42 | 8 | 072130142 |
| 43 | 9 | 072130143 |
| 44 | 10 | 072130144 |
| 45 | 10,5 | 072130145 |
| 46 | 11 | 072130146 |
| 47 | 12 | 072130147 |
| 48 | 13 | 072130148 |

## 7214G

**€ 80,00**

*Action nubuck shoe, water-repellent, with anti-abrasion insert in toe cap area*

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072140235 |
| 36 | 3,5 | 072140236 |
| 37 | 4,5 | 072140237 |
| 38 | 5 | 072140238 |
| 39 | 6 | 072140239 |
| 40 | 6,5 | 072140240 |
| 41 | 7 | 072140241 |
| 42 | 8 | 072140242 |
| 43 | 9 | 072140243 |
| 44 | 10 | 072140244 |
| 45 | 10,5 | 072140245 |
| 46 | 11 | 072140246 |
| 47 | 12 | 072140247 |
| 48 | 13 | 072140248 |

S3 SRC ESD | ESD | 500 g

## 7218G

**€ 83,50**

*Action nubuck ankle shoe, water-repellent, with anti-abrasion insert in toe cap area*

QUICK OPENING SYSTEM

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072180135 |
| 36 | 3,5 | 072180136 |
| 37 | 4,5 | 072180137 |
| 38 | 5 | 072180138 |
| 39 | 6 | 072180139 |
| 40 | 6,5 | 072180140 |
| 41 | 7 | 072180141 |
| 42 | 8 | 072180142 |
| 43 | 9 | 072180143 |
| 44 | 10 | 072180144 |
| 45 | 10,5 | 072180145 |
| 46 | 11 | 072180146 |
| 47 | 12 | 072180147 |
| 48 | 13 | 072180148 |

S3 SRC RS ESD | ESD | 550 g

# HEAVY DUTY

• ANTI-ABRASION INSERT ON HEEL AREA AND REINFORCEMENT POLYURETHANE TOE CAP COVER
• FIBREGLASS TOE CAP
• COMPOSITE FIBRE PENETRATION PROOF INSOLE

EN ISO 20345 2011

## 7293HM — € 181,50

*Greased full-grain leather shoe with high-performance VIBRAM® rubber tread*

S3 HRO HI SRC

| EU | UK | |
|---|---|---|
| 39 | 6 | 072930639 |
| 40 | 6,5 | 072930640 |
| 41 | 7 | 072930641 |
| 42 | 8 | 072930642 |
| 43 | 9 | 072930643 |
| 44 | 10 | 072930644 |
| 45 | 10,5 | 072930645 |
| 46 | 11 | 072930646 |
| 47 | 12 | 072930647 |
| 48 | 13 | 072930648 |

## 7294HM — € 192,00

*Water-repellent greased full-grain leather ankle shoes with high-performance VIBRAM® rubber tread*

S3 HRO HI SRC

| EU | UK | |
|---|---|---|
| 39 | 6 | 072940639 |
| 40 | 6,5 | 072940640 |
| 41 | 7 | 072940641 |
| 42 | 8 | 072940642 |
| 43 | 9 | 072940643 |
| 44 | 10 | 072940644 |
| 45 | 10,5 | 072940645 |
| 46 | 11 | 072940646 |
| 47 | 12 | 072940647 |
| 48 | 13 | 072940648 |

# TREKKING

• COMPOSITE TOE CAP
• COMPOSITE FIBRE PENETRATION-PROOF INSOLE

EN ISO 20345 2011

## 7249GK — € 64,00

*Suede ankle shoe with nylon inserts, quick opening system and reinforcement polyurethane toe cap cover*

S1P RS SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072490235 |
| 36 | 3,5 | 072490236 |
| 37 | 4,5 | 072490237 |
| 38 | 5 | 072490238 |
| 39 | 6 | 072490239 |
| 40 | 6,5 | 072490240 |
| 41 | 7 | 072490241 |
| 42 | 8 | 072490242 |
| 43 | 9 | 072490243 |
| 44 | 10 | 072490244 |
| 45 | 10,5 | 072490245 |
| 46 | 11 | 072490246 |
| 47 | 12 | 072490247 |
| 48 | 13 | 072490248 |

QUICK OPENING SYSTEM

## 7236BK — € 76,00

*Action Nubuck ankle shoe, waterproof, with quick opening system and reinforcement polyurethane toe cap cover*

S3 RS SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072360335 |
| 36 | 3,5 | 072360336 |
| 37 | 4,5 | 072360337 |
| 38 | 5 | 072360338 |
| 39 | 6 | 072360339 |
| 40 | 6,5 | 072360340 |
| 41 | 7 | 072360341 |
| 42 | 8 | 072360342 |
| 43 | 9 | 072360343 |
| 44 | 10 | 072360344 |
| 45 | 10,5 | 072360345 |
| 46 | 11 | 072360346 |
| 47 | 12 | 072360347 |
| 48 | 13 | 072360348 |

QUICK OPENING SYSTEM

## 7238WR — € 102,00

*Suede ankle shoe with nylon inserts, durable rubber outsole and quick opening system WR (water-resistant) footwear*

WATER RESISTANT

S3 HRO RS WR SRC

QUICK OPENING SYSTEM

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072380235 |
| 36 | 3,5 | 072380236 |
| 37 | 4,5 | 072380237 |
| 38 | 5 | 072380238 |
| 39 | 6 | 072380239 |
| 40 | 6,5 | 072380240 |
| 41 | 7 | 072380241 |
| 42 | 8 | 072380242 |
| 43 | 9 | 072380243 |
| 44 | 10 | 072380244 |
| 45 | 10,5 | 072380245 |
| 46 | 11 | 072380246 |
| 47 | 12 | 072380247 |
| 48 | 13 | 072380248 |

# EASY PLUS

• COMPOSITE TOE CAP
• COMPOSITE FIBRE PENETRATION-PROOF INSOLE

METAL FREE | EN ISO 20345 2011 | CE

## 7220PEK

**€ 66,50**

*Leather shoe, water-repellent, with nylon insets and anti-abrasion reinforcement in toe cap area*

S3 SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072200235 |
| 36 | 3,5 | 072200236 |
| 37 | 4,5 | 072200237 |
| 38 | 5 | 072200238 |
| 39 | 6 | 072200239 |
| 40 | 6,5 | 072200240 |
| 41 | 7 | 072200241 |
| 42 | 8 | 072200242 |
| 43 | 9 | 072200243 |
| 44 | 10 | 072200244 |
| 45 | 10,5 | 072200245 |
| 46 | 11 | 072200246 |
| 47 | 12 | 072200247 |
| 48 | 13 | 072200248 |

## 7221PEK

**€ 69,50**

*Leather ankle shoe, water-repellent, with nylon inserts, anti-abrasion reinforcement in toe cap area and quick opening system*

S3 RS SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072210235 |
| 36 | 3,5 | 072210236 |
| 37 | 4,5 | 072210237 |
| 38 | 5 | 072210238 |
| 39 | 6 | 072210239 |
| 40 | 6,5 | 072210240 |
| 41 | 7 | 072210241 |
| 42 | 8 | 072210242 |
| 43 | 9 | 072210243 |
| 44 | 10 | 072210244 |
| 45 | 10,5 | 072210245 |
| 46 | 11 | 072210246 |
| 47 | 12 | 072210247 |
| 48 | 13 | 072210248 |

*QUICK OPENING SYSTEM*

## 7222PEK

**€ 64,00**

*Suede shoe, perforated, with highly breathable mesh inserts*

S1P SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072220135 |
| 36 | 3,5 | 072220136 |
| 37 | 4,5 | 072220137 |
| 38 | 5 | 072220138 |
| 39 | 6 | 072220139 |
| 40 | 6,5 | 072220140 |
| 41 | 7 | 072220141 |
| 42 | 8 | 072220142 |
| 43 | 9 | 072220143 |
| 44 | 10 | 072220144 |
| 45 | 10,5 | 072220145 |
| 46 | 11 | 072220146 |
| 47 | 12 | 072220147 |
| 48 | 13 | 072220148 |

## 7223PEK

**€ 69,00**

*Suede shoe with highly breathable mesh inserts and anti-abrasion reinforcement in toe cap area*

S1P SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072230135 |
| 36 | 3,5 | 072230136 |
| 37 | 4,5 | 072230137 |
| 38 | 5 | 072230138 |
| 39 | 6 | 072230139 |
| 40 | 6,5 | 072230140 |
| 41 | 7 | 072230141 |
| 42 | 8 | 072230142 |
| 43 | 9 | 072230143 |
| 44 | 10 | 072230144 |
| 45 | 10,5 | 072230145 |
| 46 | 11 | 072230146 |
| 47 | 12 | 072230147 |
| 48 | 13 | 072230148 |

# BASIC

• COMPOSITE TOE CAP
• COMPOSITE FIBRE PENETRATION-PROOF INSOLE

EN ISO 20345 2011 CE

## 7241CK

**€ 49,00**

*Leather shoe, water-repellent*

S3 SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072411535 |
| 36 | 3,5 | 072411536 |
| 37 | 4,5 | 072411537 |
| 38 | 5 | 072411538 |
| 39 | 6 | 072411539 |
| 40 | 6,5 | 072411540 |
| 41 | 7 | 072411541 |
| 42 | 8 | 072411542 |
| 43 | 9 | 072411543 |
| 44 | 10 | 072411544 |
| 45 | 10,5 | 072411545 |
| 46 | 11 | 072411546 |
| 47 | 12 | 072411547 |
| 48 | 13 | 072411548 |

## 7243CK

**€ 50,50**

*Leather ankle shoe, water-repellent, with quick opening system*

S3 RS SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072431335 |
| 36 | 3,5 | 072431336 |
| 37 | 4,5 | 072431337 |
| 38 | 5 | 072431338 |
| 39 | 6 | 072431339 |
| 40 | 6,5 | 072431340 |
| 41 | 7 | 072431341 |
| 42 | 8 | 072431342 |
| 43 | 9 | 072431343 |
| 44 | 10 | 072431344 |
| 45 | 10,5 | 072431345 |
| 46 | 11 | 072431346 |
| 47 | 12 | 072431347 |
| 48 | 13 | 072431348 |

QUICK OPENING SYSTEM

## 7245BK

**€ 58,00**

*Lace-up leather ankle shoe, "welder style", water-repellent, with quick opening system and front protection with strap closure*

S3 RS SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072451235 |
| 36 | 3,5 | 072451236 |
| 37 | 4,5 | 072451237 |
| 38 | 5 | 072451238 |
| 39 | 6 | 072451239 |
| 40 | 6,5 | 072451240 |
| 41 | 7 | 072451241 |
| 42 | 8 | 072451242 |
| 43 | 9 | 072451243 |
| 44 | 10 | 072451244 |
| 45 | 10,5 | 072451245 |
| 46 | 11 | 072451246 |
| 47 | 12 | 072451247 |
| 48 | 13 | 072451248 |

QUICK OPENING SYSTEM

## 7246BK

**€ 50,50**

*Suede shoe, perforated*

S1P SRC

| EU | UK | |
|---|---|---|
| 35 | 2,5 | 072461235 |
| 36 | 3,5 | 072461236 |
| 37 | 4,5 | 072461237 |
| 38 | 5 | 072461238 |
| 39 | 6 | 072461239 |
| 40 | 6,5 | 072461240 |
| 41 | 7 | 072461241 |
| 42 | 8 | 072461242 |
| 43 | 9 | 072461243 |
| 44 | 10 | 072461244 |
| 45 | 10,5 | 072461245 |
| 46 | 11 | 072461246 |
| 47 | 12 | 072461247 |
| 48 | 13 | 072461248 |

## 7422P

**€ 15,00**

***2 pairs of calf-length socks made from recycled terry cotton,*** *with tremor-effect terry cloth in toe and heel areas*

| EU | | |
|---|---|---|
| 39-42 | M | 074220102 |
| 43-46 | L | 074220104 |

NEW!

## 7426P

**€ 14,00**

***2 pairs of maxi sneaker socks made from recycled terry cotton,*** *with terry cotton in sole area and tremor effect in toe and heel areas*

NEW!

| EU | | |
|---|---|---|
| 39-42 | M | 074260102 |
| 43-46 | L | 074260104 |

## 7430T

**€ 18,00**

***3 pairs of sneaker socks made from recycled cotton,*** *with tremor-effect terry cloth in toe and heel areas*

NEW!

| EU | | |
|---|---|---|
| 39-42 | M | 074300202 |
| 43-46 | L | 074300204 |

## 7818G — € 72,00

***Work trousers, multipocket style, with stretch fabric inserts***

*GREY*

| | | |
|---|---|---|
| XS | 46 | 078180000 |
| S | 48 | 078180001 |
| M | 50 | 078180002 |
| L | 52 | 078180003 |
| XL | 54 | 078180004 |
| XXL | 56 | 078180005 |
| XXXL | 58 | 078180006 |

## 7818CM — € 76,00

***Work trousers, multipocket style, hard-wearing, comfortable and practical, with unique camouflage design***

- T/C canvas, 65% polyester, 35% cotton, 260 g/m²
- Stretch fabric inserts, 90% nylon, 10% spandex; 260 g/m²
- Knee pad pockets and leg bottoms reinforced in polyester 300D

**STRENGTH**
The polyester and cotton fabric is synonymous with hard-wearing trousers.The addition of abrasion-resistant inserts on the knees and leg bottoms translates into further increased strength.

**COMFORT AND CONVENIENCE**
The addition of stretch inserts in inside legs and on the back results in remarkably comfortable trousers. Accurate details and addition of pockets, ruler pocket and hammer loop, ensuring unique convenience for the most demanding workers.

*CAMOUFLAGE*

| | | |
|---|---|---|
| XS | 46 | 078180300 |
| S | 48 | 078180301 |
| M | 50 | 078180302 |
| L | 52 | 078180303 |
| XL | 54 | 078180304 |
| XXL | 56 | 078180305 |
| XXXL | 58 | 078180306 |

## 7819G — € 72,00

**NEW!**

***Hard-wearing, comfortable, practical work trousers, multipocket style, with detachable flying pockets at waist***

- T/C canvas, 65% polyester, 35% cotton, 260 g/m²
- Stretch fabric inserts, 90% nylon, 10% spandex; 260 g/m²
- Knee pad pockets and leg bottoms reinforced in polyester 300D
- Grey with black inserts and fluorescent orange details

| | | |
|---|---|---|
| XS | 46 | 078190000 |
| S | 48 | 078190001 |
| M | 50 | 078190002 |
| L | 52 | 078190003 |
| XL | 54 | 078190004 |
| XXL | 56 | 078190005 |
| XXXL | 58 | 078190006 |

**CONVENIENCE**
Trousers designed to provide unique convenience, based on the 14 pockets. The accurate details, detachable pockets at waist and ruler pockets ensure unique convenience, even for the most demanding workers.

**STRENGTH**
The polyester and cotton fabric is synonymous with hard-wearing trousers. The addition of anti-abrasion inserts on the knees and leg bottoms translates into further increased strength.

**COMFORT**
The addition of stretch inserts in inside legs and on the back results in remarkably comfortable trousers.

## 7600N — € 74,00

***"Work trekking" trousers made from stretch fabric***

- 90% nylon, 10% stretch fabric, **265 g/m²**, black

TREKKING HEAVY SLIM FIT

| | | |
|---|---|---|
| XS | 46 | 076000100 |
| S | 48 | 076000101 |
| M | 50 | 076000102 |
| L | 52 | 076000103 |
| XL | 54 | 076000104 |
| XXL | 56 | 076000105 |
| XXXL | 58 | 076000106 |

## 7610N — € 72,00

***"Work trekking" trousers, LIGHT, made from stretch fabric***

- 90% nylon, 10% stretch fabric, **140 g/m²**, black

TREKKING LIGHT SLIM FIT

| | | |
|---|---|---|
| XS | 46 | 076100100 |
| S | 48 | 076100101 |
| M | 50 | 076100102 |
| L | 52 | 076100103 |
| XL | 54 | 076100104 |
| XXL | 56 | 076100105 |
| XXXL | 58 | 076100106 |

**UNPARALLELED COMFORT**
The stretch, lightweight fabric follows every movement, thereby translating into maximum comfort. Pre-shaped knee seams, for improved comfort.

**STRENGTH AND DURABILITY**
The addition of highly resistant stretch fabric results in even harder-wearing and more durable trousers.

**DESIGN AND CONVENIENCE**
The innovative design inspired by mountain clothing is the hallmark of the "work trekking" trousers, where comfort matches simple, captivating shapes.

## 7650 € 93,50

***Stretch work trousers, multipocket style, grey***

- Stretch fabric 90% nylon, 10% spandex, **260 g/m²**
- Knee pad pockets, rear pockets and leg bottoms reinforced in polyester 600D
- Tearproof crotch
- Higher waisted rear for increased back protection
- Two large front pockets, one with small pocket with horizontal zip closure
- Two rear pockets with strap closure
- Large left-leg pocket with strap closure and vertical pocket with zip closure
- Front right-leg pocket with horizontal zip closure
- Large knee pad pockets with strap closure
- Ruler pocket and hammer loop

| | | |
|---|---|---|
| XS | 46 | 076500000 |
| S | 48 | 076500001 |
| M | 50 | 076500002 |
| L | 52 | 076500003 |
| XL | 54 | 076500004 |
| XXL | 56 | 076500005 |
| XXXL | 58 | 076500006 |

**HEAVY**

## 7660G € 80,50

***Stretch work trousers, lightweight, multipocket, grey***

- Stretch fabric 86% nylon, 14% spandex, **140 g/m²**
- Knee pad pockets, rear pockets reinforced in polyester 300D
- Tearproof crotch
- Two large front pockets with zip closure

| | | |
|---|---|---|
| XS | 46 | 076600000 |
| S | 48 | 076600001 |
| M | 50 | 076600002 |
| L | 52 | 076600003 |
| XL | 54 | 076600004 |
| XXL | 56 | 076600005 |
| XXXL | 58 | 076600006 |

*LIGHT*

TOP line SLIM FIT CE 4-WAY STRETCH

## 7850G € 46,50

***Cargo trousers made of 100% cotton, grey***

- Slim fit
- 100% cotton fabric
- Grey with fluorescent green details

**NEW!**

**CLASSIC, THOUGH FASHIONABLE LOOK**
Simple, essential lines and attention to detail make these trousers ideal for both work and free time.

**COMFORT**
The fabric made of 100% cotton and the stretch waistband have been specially designed to provide unparalleled convenience and comfort in all working situations.

**CONVENIENCE**
Special attention to the choice and positions of the pockets results in slim yet extremely practical trousers.

| | | |
|---|---|---|
| XS | 46 | 078500100 |
| S | 48 | 078500101 |
| M | 50 | 078500102 |
| L | 52 | 078500103 |
| XL | 54 | 078500104 |
| XXL | 56 | 078500105 |
| XXXL | 58 | 078500106 |
| XXXXL | 60 | 078500107 |

SLIM FIT CE

## 7642G € 32,00

***Crew-neck sweatshirt with black inserts on shoulders and fluorescent green detail, melange grey***

60% cotton, 40% polyester, 240 g/m²
Beta's crew-neck sweatshirt is the perfect combination between comfort and a modern look.

**NEW!**

**COMFORT**
The soft, warm fabric ensures unique comfort during work. The stretch ribbed neck, cuffs and bottom result in an even more practical and functional garment.

**MODERN LOOK**
The fluorescent details as well as the coloured seams and the reflex inserts provide a touch of uniqueness and style.

| | |
|---|---|
| XS | 076420000 |
| S | 076420001 |
| M | 076420002 |
| L | 076420003 |
| XL | 076420004 |
| XXL | 076420005 |
| XXXL | 076420006 |

## 7665 € 56,50

### *Hoodie, long-zipped*

- 60% cotton, 40% polyester, 280 g/m²
- Stretch cuffs
- Two large waist pockets with zip closure
- Chest pocket with vertical zip closure
- Fixed hood with round drawcords

BLACK 7665N

GREY 7665G

TOP line

| | BLACK | GREY |
|---|---|---|
| XS | 076650000 | 076650100 |
| S | 076650001 | 076650101 |
| M | 076650002 | 076650102 |
| L | 076650003 | 076650103 |
| XL | 076650004 | 076650104 |
| XXL | 076650005 | 076650105 |
| XXXL | 076650006 | 076650106 |

## 7637G € 84,00

### *Technical fleece sweatshirt with softshell fabric inserts*

- Main fabric: fleece, 100% polyester, 250 g/m²
- Insert: softshell 100D, with bound fleece, 270 g/m²

**PROTECTION**
The fabric used makes the garment warm and comfortable, while providing cold protection during work.

**COMFORT AND DURABILITY**
Ergonomic, slim design, for an extremely comfortable and functional garment. Softshell inserts, for further strength and increased durability.

**MODERN LOOK**
Captivating design and the combination of two different materials make the sweatshirt ideal for both work and free time.

| | |
|---|---|
| XS | 076370000 |
| S | 076370001 |
| M | 076370002 |
| L | 076370003 |
| XL | 076370004 |
| XXL | 076370005 |
| XXXL | 076370006 |

## 7636N € 26,00

NEW!

### *Short-zipped microfleece sweater, black*

100% polyester fleece, 180 g/m²
This microfleece sweater combines a simple style with comfort and convenience.

**SIMPLE, ESSENTIAL LINES**
The black colour and the reflex details result in a simple style, allowing this sweater to match any garment of Beta's range.

**COMFORT AND PROTECTION**
The extremely lightweight fleece fabric results in a remarkably comfortable and slim garment for work, without compromising cold protection.

| | |
|---|---|
| XS | 076360500 |
| S | 076360501 |
| M | 076360502 |
| L | 076360503 |
| XL | 076360504 |
| XXL | 076360505 |
| XXXL | 076360506 |

## 7654N — € 45,00

***Stretch microfleece sweater, short-zipped, black***

- 180 g

TOP line — 4-WAY STRETCH

- 95% polyester, 5% spandex
- Stretch cuffs
- Chest pocket with vertical zip closure
- Polyester inserts on chest pocket and sleeves

| | |
|---|---|
| XS | 076540000 |
| S | 076540001 |
| M | 076540002 |
| L | 076540003 |
| XL | 076540004 |
| XXL | 076540005 |
| XXXL | 076540006 |

## 7657N — € 57,50

***Stretch fleece sweater, long-zipped, black***

- 280 g
- Two large waist pockets with zip closure

| | |
|---|---|
| XS | 076570000 |
| S | 076570001 |
| M | 076570002 |
| L | 076570003 |
| XL | 076570004 |
| XXL | 076570005 |
| XXXL | 076570006 |

## 7750N — € 79,50

NEW!

***Work bomber jacket, multipocket style, waterproof, black***

- Exterior fabric: 100% 50D polyester, waterproof, hard-wearing
- Interior fabric: 100% polyester
- Padding: 100% polyester
- Collar: 95% polyester fleece, 5% spandex

**PROTECTION**
The 100% polyester fabric and padding are the name for remarkable strength and cold protection in a simple, yet functional garment.

**CONVENIENCE**
The two chest pockets and the waist pockets with zip closure mean an optimal solution translating into a practical, functional garment.

**CUSTOMIZATION**
The interior pocket allows for a fully customized garment.

CE

| | |
|---|---|
| XS | 077500000 |
| S | 077500001 |
| M | 077500002 |
| L | 077500003 |
| XL | 077500004 |
| XXL | 077500005 |
| XXXL | 077500006 |
| XXXXL | 077500007 |

## 7670G — € 106,00

***Anorak jacket made of Oxford polyester 300D waterproof, PU-coated, grey***

- Detachable hood with stretch drawstring adjustment
- PU-coated (resistance to water columns up to 2,000 mm - breathability 2,000 mvp)
- Outer fabric:100% polyester
- Inner fabric: 100% polyester

| | |
|---|---|
| S | 076700001 |
| M | 076700002 |
| L | 076700003 |
| XL | 076700004 |
| XXL | 076700005 |
| XXXL | 076700006 |

## 7673NG — € 95,00

***Sleeveless work jacket, with GRAPHENE padding, 80 g/m², grey/black***

- Outer fabric: front and shoulders: softshell fabric - 96% polyester, 4% spandex
  back: 100% nylon 20D
- Stretch inserts on armholes

TOP line — CE

| | |
|---|---|
| S | 076730001 |
| M | 076730002 |
| L | 076730003 |
| XL | 076730004 |
| XXL | 076730005 |
| XXXL | 076730006 |

## 7780QN — € 126,00

***Work bomber jacket, black/grey***

| | |
|---|---|
| S | 077800201 |
| M | 077800202 |
| L | 077800203 |
| XL | 077800204 |
| XXL | 077800205 |
| XXXL | 077800206 |

- Exterior chest and back fabric: 100% nylon 300D, waterproof and hard-wearing
- Shoulders, sleeves and hood: softshell, 96% polyester, 4% spandex
- Interior fabric: 100% polyester
- Padding: 100% polyester

**PROTECTION**

Traditional nylon fabric on the chest and back has been supplemented with softshell inserts on the shoulders, arms and hood, for an even more water and wind proof garment.

**DESIGN AND INNOVATION**

The combination of two fabrics and colours - grey and black - and the new hot quilting system result in an innovative, modern garment, ideal for both work and free time.

## 7579QN — € 74,50

***Sleeveless work jacket, black/grey***

| | |
|---|---|
| S | 075790201 |
| M | 075790202 |
| L | 075790203 |
| XL | 075790204 |
| XXL | 075790205 |
| XXXL | 075790206 |

# Cotton

***• 97% COTTON, 3% STRETCH FABRIC, 220 g/m²***
***• COLOUR: GREY WITH REFLECTIVE GREY DETAILS***

## 7930MG — € 59,50

***Work trousers, multipocket style***

- Knee pad inserts with strap closure

**NEW!**

| | |
|---|---|
| XS | 079300400 |
| S | 079300401 |
| M | 079300402 |
| L | 079300403 |
| XL | 079300404 |
| XXL | 079300405 |
| XXXL | 079300406 |

- Elastic waistband
- Two large front pockets
- Two rear pockets with strap closure
- Large front pockets with strap closure
- Waist key ring
- Rear band with Beta logo
- Reflex logo on left-leg pocket

## 7931MG — € 48,00

***Work bermuda shorts***

**NEW!**

| | |
|---|---|
| XS | 079310400 |
| S | 079310401 |
| M | 079310402 |
| L | 079310403 |
| XL | 079310404 |
| XXL | 079310405 |
| XXXL | 079310406 |

## 7935MG — € 104,50

**NEW!**

***Work overalls***

- Front closure with double tap zipper slider
- Collar with strap closure
- Cuffs with strap adjusters
- Knee pad inserts with strap closure

| | |
|---|---|
| XS | 079350400 |
| S | 079350401 |
| M | 079350402 |
| L | 079350403 |
| XL | 079350404 |
| XXL | 079350405 |
| XXXL | 079350406 |

## 7937MG — € 55,50

**NEW!**

***Sleeveless work jacket***

- Front zip closure, flap-covered with strap closure
- Anti-abrasion inserts made from "Oxford" polyester/PU, 220 g/m²
- Chest pockets with strap closure and pen pocket
- Large waist pockets with strap closure
- Adjustable waistband with strap

| | |
|---|---|
| XS | 079370400 |
| S | 079370401 |
| M | 079370402 |
| L | 079370403 |
| XL | 079370404 |
| XXL | 079370405 |
| XXXL | 079370406 |

# EASY CANVAS 260 g

• *T/C CANVAS, 65% POLYESTER, 35% COTTON, 260 g/m²*

BetaEASY CE

## 7900G

**€ 58,50**

***Work trousers***

- Inserts and knee pads made of "Oxford" polyester/PU, 220 g/m²
- Knee pad pockets

| | | |
|---|---|---|
| XS | 46 | 079000800 |
| S | 48 | 079000801 |
| M | 50 | 079000802 |
| L | 52 | 079000803 |
| XL | 54 | 079000804 |
| XXL | 56 | 079000805 |
| XXXL | 58 | 079000806 |
| XXXXL | 60 | 079000807 |

## 7901G

**€ 47,50**

***Work Bermuda shorts***

- Inserts in "Oxford" polyester/PU, 220 g/m²

- Metal zip closure
- Two deep front pockets with small tool inserts with strap closure
- Large left-leg pocket with strap closure, mobile phone pocket and badge insert
- Large rear pockets with "Oxford" reinforcement and strap closure
- Ruler pocket and hammer loop

| | | |
|---|---|---|
| XS | 46 | 079010800 |
| S | 48 | 079010801 |
| M | 50 | 079010802 |
| L | 52 | 079010803 |
| XL | 54 | 079010804 |
| XXL | 56 | 079010805 |
| XXXL | 58 | 079010806 |
| XXXXL | 60 | 079010807 |

## 7903G

**€ 73,50**

***Work bib and brace overalls***

- Metal zip closure
- Adjustable stretch shoulder straps, with quick-release snap hooks made of plastic
- Large chest pocket with strap closure

| | |
|---|---|
| XS | 079030800 |
| S | 079030801 |
| M | 079030802 |
| L | 079030803 |
| XL | 079030804 |
| XXL | 079030805 |
| XXXL | 079030806 |
| XXXXL | 079030807 |

## 7905G

**€ 91,50**

***Work overalls***

- Cuffs with strap adjusters
- Front strap closure with flap-covered double tap zip
- Large left-side pocket with strap closure, mobile phone pocket and badge insert

- Inserts and knee pads made of "Oxford" polyester/PU, 220 g/m²
- Stretch waistband
- Chest pockets with strap closure and pen pocket
- Two deep front pockets with small tool inserts with strap closure
- Large rear pockets with "Oxford" reinforcement and strap closure
- Ruler pocket and hammer loop
- Knee pad inserts

| | |
|---|---|
| XS | 079050800 |
| S | 079050801 |
| M | 079050802 |
| L | 079050803 |
| XL | 079050804 |
| XXL | 079050805 |
| XXXL | 079050806 |
| XXXXL | 079050807 |

## 7907G

**€ 54,50**

***Sleeveless work jacket***

- Insets made from "Oxford" polyester/PU, 220 g/m².
- Chest pockets with strap closure, pen pocket and badge insert
- Expanding waist pockets with zips and pullers

| | |
|---|---|
| XS | 079070800 |
| S | 079070801 |
| M | 079070802 |
| L | 079070803 |
| XL | 079070804 |
| XXL | 079070805 |
| XXXL | 079070806 |
| XXXXL | 079070807 |

## 7909G

**€ 65,00**

***Work jacket***

- Inserts in "Oxford" polyester/PU, 220 g/m²
- Cuffs with strap adjusters
- Front strap closure with flap-covered double tap zip
- Adjustable waist
- Chest pockets with strap closure, pen pocket and badge insert
- Two deep waist pockets with strap closure

| | |
|---|---|
| XS | 079090800 |
| S | 079090801 |
| M | 079090802 |
| L | 079090803 |
| XL | 079090804 |
| XXL | 079090805 |
| XXXL | 079090806 |
| XXXXL | 079090807 |

# EASY TWILL 180 g

• T/C TWILL, 65% POLYESTER, 35% COTTON, 180 g/m²

Beta EASY LIGHT CE

## 7860G

**€ 53,00**

### Work trousers

- Inserts and knee pads made of "Oxford" polyester/PU, 220 g/m²
- Knee pad pockets

LIGHT

| | | |
|---|---|---|
| XS | 46 | 078600800 |
| S | 48 | 078600801 |
| M | 50 | 078600802 |
| L | 52 | 078600803 |
| XL | 54 | 078600804 |
| XXL | 56 | 078600805 |
| XXXL | 58 | 078600806 |
| XXXXL | 60 | 078600807 |
| 5XL | 62 | 078600808 |

## 7861G

**€ 44,00**

### Work Bermuda shorts

- Inserts in "Oxford" polyester/PU, 220 g/m²

- Metal zip closure
- Two deep front pockets with small tool inserts with strap closure
- Large left-leg pocket with strap closure, mobile phone pocket and badge insert
- Large rear pockets with "Oxford" reinforcement and strap closure
- Ruler pocket and hammer loop

LIGHT

| | | |
|---|---|---|
| XS | 46 | 078610800 |
| S | 48 | 078610801 |
| M | 50 | 078610802 |
| L | 52 | 078610803 |
| XL | 54 | 078610804 |
| XXL | 56 | 078610805 |
| XXXL | 58 | 078610806 |
| XXXXL | 60 | 078610807 |
| 5XL | 62 | 078610808 |

## 7863G

**€ 65,00**

### Work bib and brace overalls

- Metal zip closure
- Adjustable stretch shoulder straps, with quick-release snap hooks made of plastic
- Large chest pocket with strap closure

LIGHT

| | |
|---|---|
| XS | 078630800 |
| S | 078630801 |
| M | 078630802 |
| L | 078630803 |
| XL | 078630804 |
| XXL | 078630805 |
| XXXL | 078630806 |
| XXXXL | 078630807 |
| 5XL | 078630808 |

## 7865G

**€ 84,50**

### Work overalls

- Cuffs with strap adjusters
- Front strap closure with flap-covered double tap zip
- Large left-side pocket with strap closure, mobile phone pocket and badge insert

- Inserts and knee pads made of "Oxford" polyester/PU, 220 g/m²
- Stretch waistband
- Chest pockets with strap closure and pen pocket
- Two deep front pockets with small tool inserts with strap closure
- Large rear pockets with "Oxford" reinforcement and strap closure
- Ruler pocket and hammer loop
- Knee pad inserts

LIGHT

| | |
|---|---|
| XS | 078650800 |
| S | 078650801 |
| M | 078650802 |
| L | 078650803 |
| XL | 078650804 |
| XXL | 078650805 |
| XXXL | 078650806 |
| XXXXL | 078650807 |
| 5XL | 078650808 |

## 7867G

**€ 49,00**

### Sleeveless work jacket

- Insets made from "Oxford" polyester/PU, 220 g/m².
- Chest pockets with strap closure, pen pocket and badge insert
- Expanding waist pockets with zips and pullers

LIGHT

| | |
|---|---|
| XS | 078670800 |
| S | 078670801 |
| M | 078670802 |
| L | 078670803 |
| XL | 078670804 |
| XXL | 078670805 |
| XXXL | 078670806 |
| XXXXL | 078670807 |
| 5XL | 078670808 |

## 7869G

**€ 57,50**

### Work jacket

- Inserts in "Oxford" polyester/PU, 220 g/m²
- Cuffs with strap adjusters
- Front strap closure with flap-covered double tap zip
- Adjustable waist
- Chest pockets with strap closure, pen pocket and badge insert
- Two deep waist pockets with strap closure

LIGHT

| | |
|---|---|
| XS | 078690800 |
| S | 078690801 |
| M | 078690802 |
| L | 078690803 |
| XL | 078690804 |
| XXL | 078690805 |
| XXXL | 078690806 |
| XXXXL | 078690807 |
| 5XL | 078690808 |

## 7548M — € 25,00

NEW!

*Modern print t-shirt,*
*100% cotton, 150 g/m², black*

| | |
|---|---|
| XS | 075480400 |
| S | 075480404 |
| M | 075480401 |
| L | 075480402 |
| XL | 075480403 |
| XXL | 075480405 |
| XXXL | 075480406 |

## 7548C — € 25,00

NEW!

*Classic print t-shirt,*
*100% cotton, 150 g/m² , black*

| | |
|---|---|
| XS | 075480500 |
| S | 075480501 |
| M | 075480502 |
| L | 075480503 |
| XL | 075480504 |
| XXL | 075480505 |
| XXXL | 075480506 |

## 9525TR — 095250011

NEW!

€ 25,00

*Trucker cap with curved visor,*
*50% cotton, 50% polyester,*
*rear mesh, snapback style, black*

## 9526F — 095260005

NEW!

€ 551,00

*Mini fridge, energy efficiency*
*class F, capacity 63 l, black*

## 9520P — 095200100

NEW!

€ 70,50

*Umbrella stand,*
*made from galvanized metal,*
*with drip tray, black*

## 9563U — 095630020

€ 367,00

*Office armchair, ergonomic*

**Dimensions:**

- Back height: 97 cm
- Seat dimensions: 50 cm x 53 cm
- Overall chair height: 133-144 cm
- Base: 35 cm (leg length) x 49 cm (height)

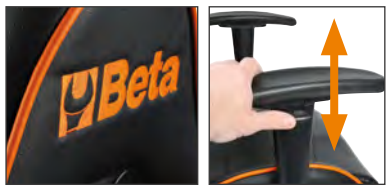

2024

# Beta AMBASSADOR

## FABIO QUARTARARO

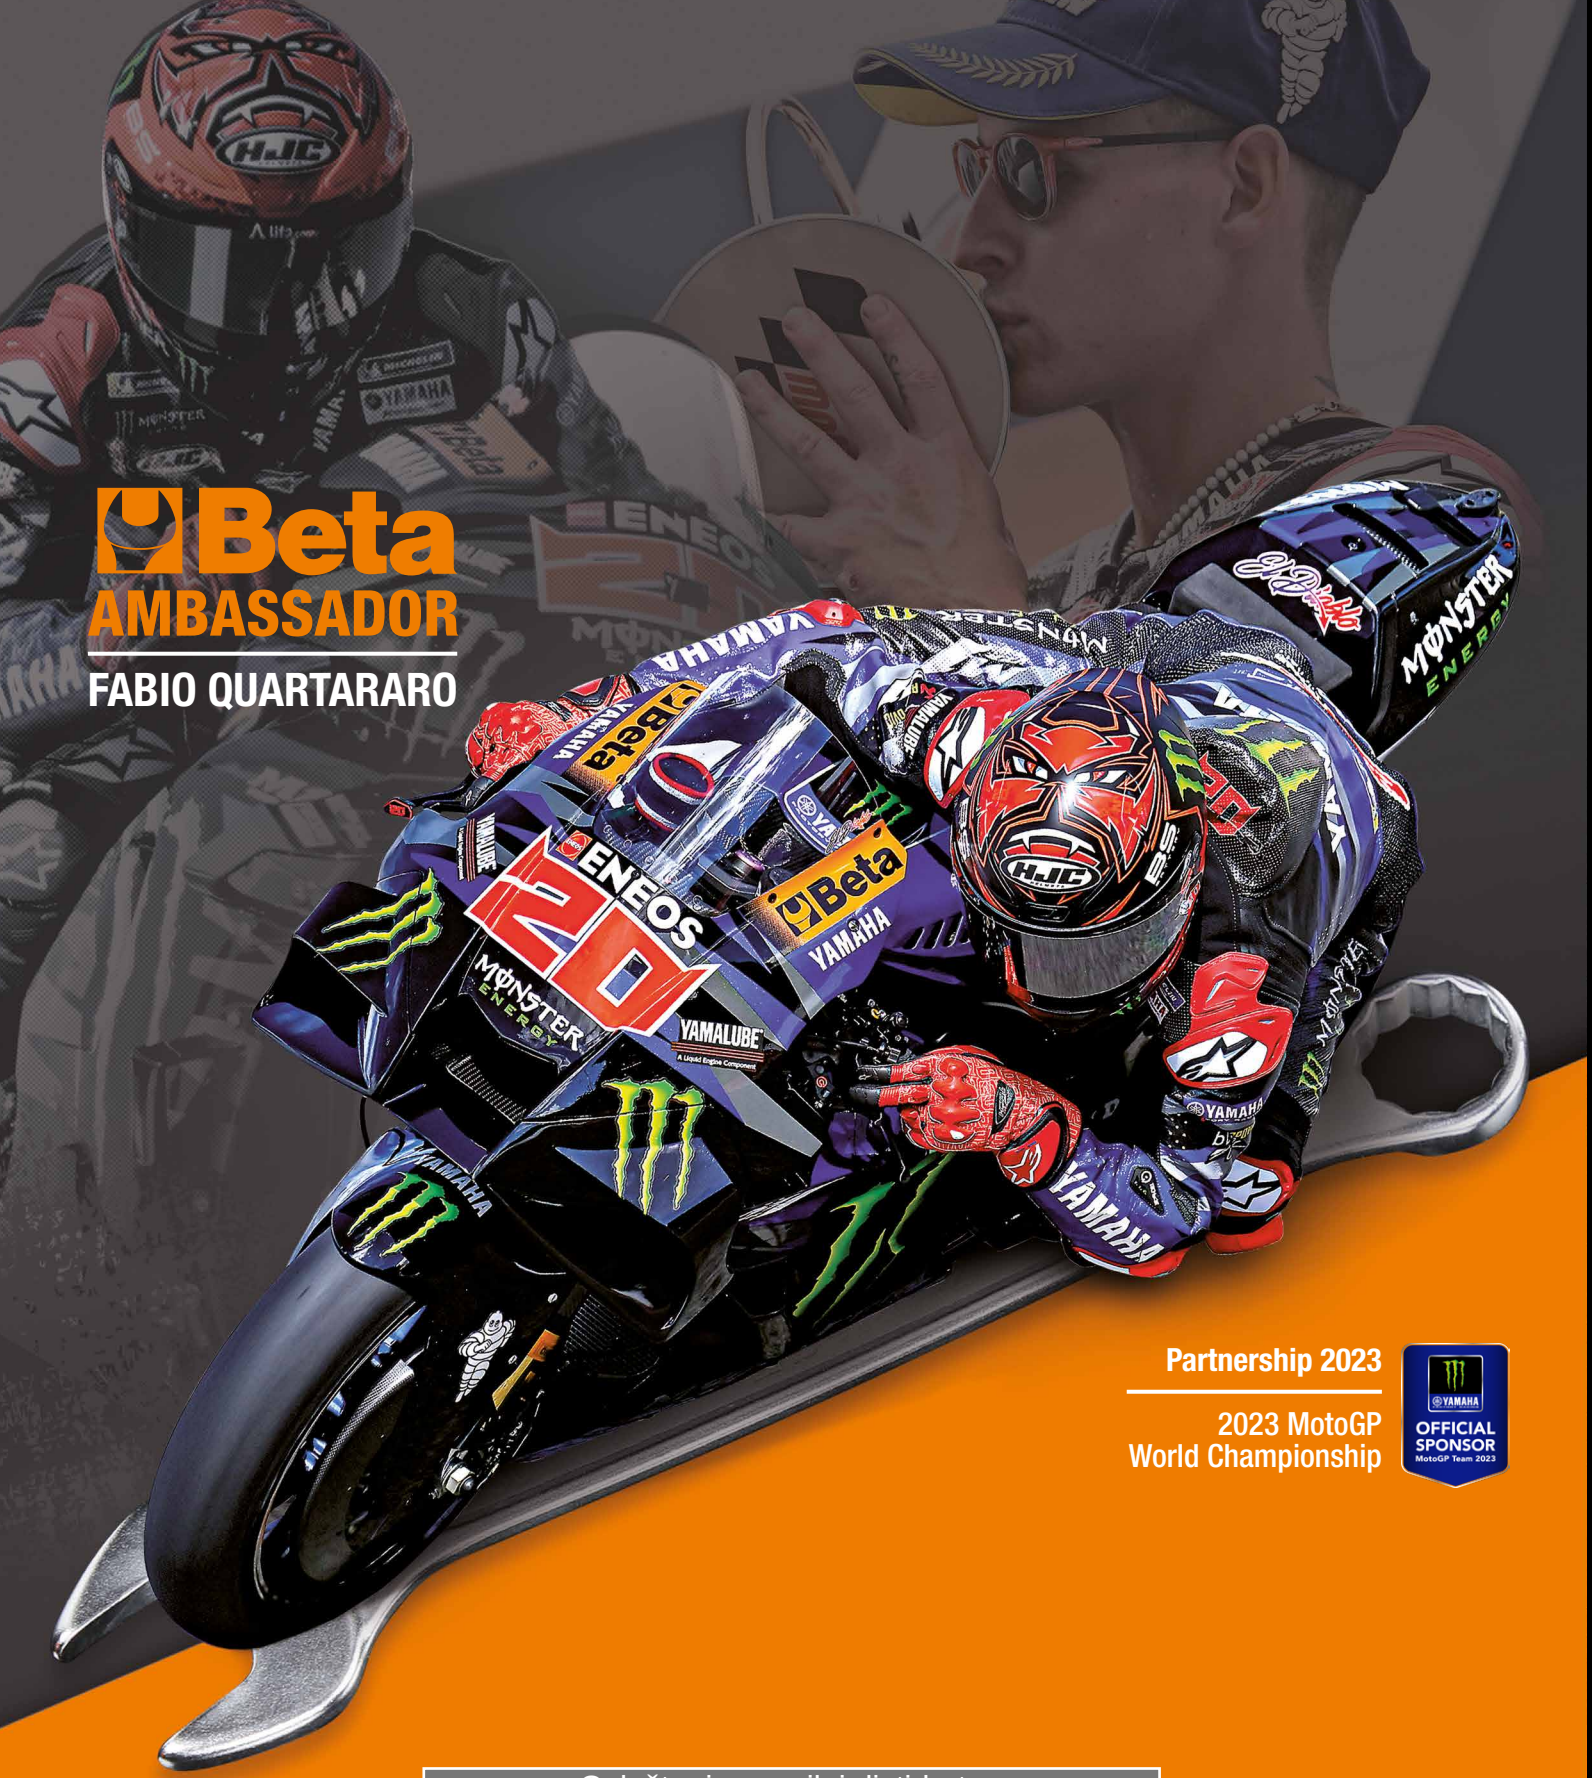

Partnership 2023

2023 MotoGP World Championship

OFFICIAL SPONSOR MotoGP Team 2023

Ovlašteni uvoznik i distirbuter:

**LUMBERTRANS d.o.o.**
Jušići 69/E, 51211 Matulji
051/274-477
lumbertrans@ri.t-com.hr

**www.lumbertrans.com**

998016029

8 054809 549125

**Beta Utensili S.p.A. | via Volta, 18 | 20845 Sovico (MB) | tel +39 039 20771**
**www.beta-tools.com**